

# Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades

## Soil and Water Management Plan

### Sydney Metro Integrated Management System (IMS)

<b>Applicable to:</b>	City & Southwest
<b>Document Owner:</b>	Southwest Metro
<b>Document Number:</b>	SMCSWSW6-DEW-WEC-EM-PLN-000105
<b>Status:</b>	Final
<b>Version:</b>	Rev 07.4
<b>Date of issue:</b>	13 December 2023
<b>Review date:</b>	13 June 2024

# TABLE OF CONTENTS

- 1 INTRODUCTION ..... 5**
  - 1.1 Context and scope of this Sub-plan..... 8
  - 1.2 Project background..... 8
  - 1.3 Objectives and targets ..... 8
  - 1.4 Consultation ..... 9
- 2 LEGAL AND APPROVAL REQUIREMENTS ..... 11**
  - 2.1 Guidelines ..... 12
  - 2.2 Conditions of Approval..... 13
  - 2.3 Environment Protection Licence ..... 19
  - 2.4 Roles and Responsibilities..... 19
- 3 EXISTING ENVIRONMENT ..... 21**
  - 3.1 Topography ..... 21
  - 3.2 Geology ..... 21
    - 3.2.1 Soil landscapes ..... 21
    - 3.2.2 Soil salinity ..... 23
    - 3.2.3 Acid Sulfate soils ..... 23
  - 3.3 Contamination ..... 25
    - 3.3.1 Hazardous materials ..... 27
  - 3.4 Groundwater ..... 28
  - 3.5 Surface water ..... 29
    - 3.5.1 Catchments and waterways ..... 29
    - 3.5.2 Surface water quality ..... 32
  - 3.6 Flooding ..... 32
- 4 ENVIRONMENTAL ASPECTS AND IMPACTS ..... 34**
  - 4.1 Construction activities ..... 34
- 5 SOIL AND WATER MANAGEMENT ..... 36**
  - 5.1 Erosion and sediment control ..... 36
    - 5.1.1 General principles ..... 36
    - 5.1.2 Resources ..... 37
    - 5.1.3 Sediment basins ..... 37
    - 5.1.4 Erosion and Sediment Control Plans ..... 37
  - 5.2 Surface water management..... 39
    - 5.2.1 Reuse ..... 39
    - 5.2.2 Offsite discharge ..... 40
  - 5.3 Potable water ..... 40
  - 5.4 Flooding management ..... 41
  - 5.5 Groundwater management ..... 42
  - 5.6 Refuelling, chemicals and spill management ..... 42
  - 5.7 Contamination ..... 44
  - 5.8 Unexpected finds ..... 44
  - 5.9 Asbestos ..... 45

5.10	Salinity .....	45
5.11	Acid sulfate soils .....	45
5.11.1	Treatment and liming .....	47
5.11.2	Waste classification and offsite disposal .....	47
<b>6</b>	<b>WATER QUALITY MONITORING PROGRAM .....</b>	<b>49</b>
6.1	Overview .....	49
6.2	Monitoring purpose, objectives and scope .....	49
6.3	Available baseline data .....	50
6.4	Construction water quality monitoring .....	50
6.5	Monitoring parameters .....	50
6.6	Monitoring frequency and locations .....	51
6.7	Meteorological monitoring .....	54
6.8	Reporting .....	55
6.9	Adaptive management .....	55
<b>7</b>	<b>TRAINING .....</b>	<b>56</b>
<b>8</b>	<b>MONITORING, AUDITING AND REPORTING .....</b>	<b>57</b>
<b>9</b>	<b>REVIEW AND IMPROVEMENT .....</b>	<b>58</b>
<b>10</b>	<b>SWMP ADMINISTRATION .....</b>	<b>59</b>
10.1	Hold points .....	59
10.2	Records .....	59
	<b>APPENDIX A – OTHER CONDITIONS OF APPROVAL, REVISED ENVIRONMENTAL MITIGATION MEASURES AND CEMF REQUIREMENTS RELEVANT TO THIS PLAN .....</b>	<b>60</b>
	<b>APPENDIX B – UNEXPECTED CONTAMINATED LAND AND ASBESTOS FINDS PROCEDURE .....</b>	<b>68</b>
	<b>APPENDIX C – ACID SULFATE SOILS TREATMENT PROCESS .....</b>	<b>70</b>
	<b>APPENDIX D – CONSULTATION REGISTER .....</b>	<b>71</b>
	<b>APPENDIX E – SYDNEY METRO WATER DISCHARGE OR REUSE PROCEDURE AND FORM .....</b>	<b>73</b>
	<b>APPENDIX F – WATER DISCHARGE MANAGEMENT STANDARD (DG-ZH-ST064) .....</b>	<b>87</b>
	<b>APPENDIX G – WATER RELEASE PERMIT (DG-ZH-ST064.1) .....</b>	<b>88</b>

## FIGURES

Figure 1	Soil landscapes along the project alignment. Indicative project areas shown in red. ....	22
Figure 2	Salinity potential and ASS risk. Indicative project areas shown in red. ....	24
Figure 3	Catchment area and watercourse locations. Indicative project areas shown in red. ....	31

## **TABLES**

Table 1: Soil and water objectives and targets .....	8
Table 2: Consultation carried out in the development of this Plan .....	9
Table 3: Legislation and Planning Instruments .....	11
Table 4: SWMP Compliance Matrix .....	14
Table 5: Roles and Responsibilities .....	19
Table 6: Areas with a medium to high contamination risk along the rail corridor .....	25
Table 7: Registered contaminated sites .....	26
Table 8: Targeted Contamination Assessment exceedances in proximity to the Project .....	26
Table 9: Aspects and potential impacts .....	34
Table 10: Water quality criteria for discharging off premises .....	40
Table 11: Water quality monitoring parameters at Wiley Park .....	51
Table 12: Water quality monitoring schedule .....	51
Table 13: Wiley Park water quality monitoring program .....	53
Table 14: Meteorological monitoring program .....	54
Table 15: SWMP hold points .....	59

## DOCUMENT CONTROL

<b>Title</b>	Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades Soil and Water Management Plan
<b>Document No/Ref</b>	SWM-HBW-SWMP-001

## VERSION CONTROL

Revisions	Date	Description
00	6 November 2020	For External Consultation
01	22 December 2020	Revised in response to ER comments and external consultation feedback. Revised for ER endorsement and issue to DPE
02	4 February 2021	Revised in response to DPE comments
03	16 February 2021	Revised in response to DPE comments
04	12 March 2021	Alignment to Downer EMS
05	11 August 2021	Revised in response to ER & SM comments
06	28 September 2021	Formatting changes
07	11 May 2022	Six-monthly update
07.1	24 October 2022	Six-monthly update – no update to the document required
07.2	19 April 2023	Six-monthly update – no update to the document required
07.3	23 May 2023	Change from Downer to DT Infrastructure Pty Ltd
07.4	13 December 2024	Six-monthly update – Change to DT Infrastructure management plan template

## TERMS AND DEFINITIONS

Terms	Definitions
<b>AS</b>	Australian Standards
<b>AEP</b>	Annual exceedance probability
<b>ARI</b>	Average Rainfall Intensity
<b>AS</b>	Australian Standard
<b>ASS</b>	Acid Sulfate Soils
<b>bTOC</b>	Below top of casing
<b>BTEX</b>	Benzene, Toluene, Ethylbenzene and Xylenes.
<b>CoA</b>	Conditions of Approval (SSI-8256)
<b>CoCB</b>	City of Canterbury-Bankstown Council
<b>CEMF</b>	Construction Environmental Management Framework
<b>CEMP</b>	Construction Environmental Management Plan
<b>CoA</b>	Conditions of Approval
<b>CoCB</b>	City of Canterbury-Bankstown Council
<b>CSSI</b>	Critical Station Significant Infrastructure
<b>DCCEEW</b>	NSW Department of Climate Change, Energy, the Environment and Water
<b>DoI</b>	NSW Department of Industry
<b>DPE</b>	Department of Planning and Environment
<b>ECM</b>	Environmental Control Map
<b>EES</b>	Environment, Energy and Science – DPE (formerly OEH)
<b>EIA</b>	Environmental Impact Assessment
<b>EIS</b>	Environmental Impact Statement
<b>EP&amp;A Act</b>	Environment Planning and Assessment Act 1979 (NSW)
<b>EPA</b>	NSW Environment Protection Authority
<b>EPL</b>	Environment Protection Licence under the POEO Act
<b>EMS</b>	Environmental Management System
<b>EMP</b>	Environmental Management Plan
<b>ER</b>	Environmental Representative
<b>ESC</b>	Erosion and sediment control
<b>ESCP</b>	Erosion and sediment control plan
<b>ERSED</b>	Erosion and sedimentation
<b>FFMP</b>	Flora and Fauna Management Plan
<b>GREP</b>	Government Resource Efficiency Policy
<b>HMP</b>	Heritage Management Sub Plan
<b>IMS</b>	Integrated Management System (aligned to Sydney Metro and Downer)
<b>ISO</b>	International Standardization Organisation
<b>LEP</b>	Local Environment Plan
<b>MM</b>	Mitigation Measures (REMM – SPIR)
<b>NEPM</b>	National Environment Protection Measures

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

Terms	Definitions
<b>NML</b>	Noise Management Level
<b>NRAR</b>	Natural Resources Access Regulator (formerly DoI Water)
<b>NSW</b>	New South Wales
<b>NVMP</b>	Noise and Vibration Management Plan
<b>OCCS</b>	Sydney Metro Overarching Community Communication Strategy
<b>OCP</b>	Organochlorine pesticides
<b>OPP</b>	Organophosphorous pesticides
<b>OOHW</b>	Out-of-Hour Works
<b>PASS</b>	Potential Acid Sulfate Soils
<b>PCB</b>	Polychlorinated biphenyls
<b>PINS</b>	Penalty Infringement Notices
<b>POEO Act</b>	Protection of Environment Operations Act 1997 (NSW)
<b>PPE</b>	Personal Protective Equipment
<b>Proponent</b>	The person or organisation identified as the proponent in Schedule 1 of the planning approval. In this case Transport for NSW
<b>QMP</b>	Quality Management Plan
<b>RBL</b>	Rating Background Level
<b>REMM</b>	Revised Environmental Mitigation Measure
<b>SDS</b>	Safety Data Sheet
<b>SDG</b>	TfNSW Sustainable Design Guidelines (Version 4)
<b>Secretary</b>	The Secretary of the Department of Planning and Environment
<b>SMA</b>	Sydney Metro Authority (the proponent)
<b>SMP</b>	Sustainability Management Plan
<b>SMEW</b>	Southwest Metro Early Works
<b>SoHI</b>	Statement of Heritage Impact
<b>SWMP</b>	Soil and Water Management Plan
<b>SPIR</b>	Submissions and Preferred Infrastructure Report
<b>SSI</b>	State Significant Infrastructure
<b>SWMP</b>	Soil and Water Management Plan
<b>SWMS</b>	Safe Works Method Statement
<b>TPH</b>	Total Petroleum Hydrocarbons
<b>TPZ</b>	Tree Protection Zone
<b>TRH</b>	Total Recoverable Hydrocarbons
<b>TSS</b>	Total Suspended Solids
<b>TfNSW</b>	Transport for New South Wales.
<b>TMP</b>	Traffic Management Sub Plan
<b>VENM</b>	Virgin Excavated Natural Material
<b>WARR Act</b>	Waste Avoidance and Resource Recovery Act 2001 (NSW)

# 1 INTRODUCTION

## 1.1 Context and scope of this Sub-plan

This Soil and Water Management Plan (SWMP or Plan) forms part of the Construction Environmental Management Plan (CEMP) for Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades (the Project).

This SWMP has been prepared to address requirements of the Conditions of Approval (CoA) SSI-8256 granted 12 December 2018 (and updated on 22 October 2020 in response to Mod-1) by NSW Department of Planning and Environment (DPE), the Revised Environmental Mitigation Measures (REMM), and the Sydney Metro Construction Environmental Management Framework (CEMF).

Downer is Sydney Metro’s Principal Contractor for Package 6.

This SWMP describes how Downer proposes to manage soil and water during the construction of the Project. Operational management measures do not fall within the scope of this Plan and therefore are not included.

From 01 June 2023, Downer started operating under the name DT Infrastructure, following the acquisition of the Downer Infrastructure branch by Gamuda Australia.

## 1.2 Project background

The Sydney Metro City and Southwest – Sydenham to Bankstown Upgrade Environmental Impact Statement (EIS) (GHD/AECOM September 2017) assessed the impacts of construction and operation on soil, contamination, surface and groundwater within Chapter 20 (Soils and contamination) and Chapter 21 (Hydrology, flooding and water quality). The Sydney Metro City and Southwest - Sydenham to Bankstown Upgrade Submissions and Preferred Infrastructure Report (SPIR) (GHD/AECOM June 2018) was prepared in response to the submissions received during the EIS exhibition period. The SPIR revised the scope of the Sydenham to Bankstown Upgrade project, resulting in a reduction of potential hydrology, flooding and water quality impacts during construction. However, the SPIR concluded that potential soil and contamination impacts related to construction of the preferred project would not differ substantially from those of the exhibited project that were described in the EIS.

Please refer to Section 1 of the CEMP for the Project Description.

## 1.3 Objectives and targets

This SWMP provides the basis for the management of soil and water in order to minimise the risk of impact during works. The objectives and targets of soil and water management and mitigation are outlined in Table 1.

Table 1: Soil and water objectives and targets

Objective	Target
Minimise pollution of surface water through appropriate erosion and sediment control.	Erosion and sediment controls are to be inspected on the following basis; Weekly during environmental inspection Prior to a rainfall of >20mm in a 24-hour period, where forecasted Following a rainfall event of >20mm in a 24-hour period Daily Records of inspections will be maintained by the Principal Contractor. All water will be tested (and treated if required) prior to discharge from the site in order to determine compliance with the parameters outlined in the Sydney Metro – Water Discharge or Reuse Procedure (refer to Appendix E) and/or the Principal Contractor’s EPL (where relevant). No water will be discharged from the site without written approval of the Contractor’s Environmental Manager (or delegate). No pollution incidents resulting in environmental harm or regulatory action.



Maintain existing water quality of surrounding surface watercourses	Water quality monitoring to be undertaken in accordance with the frequencies committed to in Section <b>Error! Reference source not found.</b> and to show that the Project's works have not impacted baseline water quality (i.e. water quality not to worsen from baseline readings). No pollution incidents resulting in environmental harm or regulatory action.
Source construction water from non-potable sources, where feasible and reasonable	Produce a Water Balance Study prior to Construction

These objectives conform to Sydney Metro objectives as described in the CEMF.

## 1.4 Consultation

CoA C3(b) requires that the SWMP be prepared in consultation with the relevant Councils, NSW Office of Environment and Heritage (OEH) (note OEH were dissolved in July 2019 and replaced by the Environment, Energy and Science (EES)) and the Department of Industry (DoI), which has been replaced by the Natural Resources Access Regulator (NRAR).

CoA C8(b) requires that the Water Quality Monitoring Program, included in this SWMP, is prepared in consultation with relevant Councils. REMM FHW4 also requires the Water Quality Monitoring Program to be developed in consultation with NSW Environment Protection Authority (EPA).

As such the following stakeholders have been consulted in developing this SWMP:

- ▶ NRAR (formerly DoI);
- ▶ EES (formerly OEH);
- ▶ NSW EPA; and
- ▶ City of Canterbury Bankstown Council (CoCB).

A summary of the consultation is provided in Table 2 and in Appendix D.

Table 2: Consultation carried out in the development of this Plan

No.	Agency Consultation	Requirements and date submitted	Key issues raised	SWMP Section Reference
<b>Conditions of Approval</b>				
C6	DPE	Submitted for Approval Re-submitted in response to DPE comments	Various comments	Section 3 Section 5 Section <b>Error! Reference source not found.</b>
C3(b)	CoCB	Issued for consultation 6/11/20. Invited to consultation workshop 16/11/20. Response received 16/11/20.	Nil.	N/A
	NRAR	Issued for consultation 6/11/20. Invited to consultation workshop 16/11/20. Followed up with phone call 26/11/20. Followed up with phone call 17/12/20. Followed up with phone call 21/12/20. Response received 12/01/21	Nil	N/A

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

No.	Agency Consultation	Requirements and date submitted	Key issues raised	SWMP Section Reference
	EES	Issued for consultation 6/11/20. Invited to consultation workshop 16/11/20. Response received 20/11/20	Nil	N/A
C8(b)	CoCB	Issued for consultation 6/11/20. Invited to consultation workshop 16/11/20. Response received 16/11/20.	Nil.	N/A
<b>Revised Environmental Mitigation Measures</b>				
FHW4	NSW EPA	Issued for consultation 6/11/20. Invited to consultation workshop 16/11/20. Response received 2/12/20.	Nil	N/A

## 2 LEGAL AND APPROVAL REQUIREMENTS

The SWMP addresses applicable requirements within the following documents:

- ▶ The Sydney Metro City and Southwest - Sydenham to Bankstown Upgrade Conditions of Approval SSI-8256, determined 12 December 2018;
- ▶ The Sydney Metro City and Southwest - Sydenham to Bankstown Upgrade Environmental Impact Statement, September 2017;
- ▶ The Sydney Metro City and Southwest - Sydenham to Bankstown Upgrade Submissions and Preferred Infrastructure Report, dated June 2018;
- ▶ The Sydney Metro City and Southwest - Sydenham to Bankstown Upgrade Bankstown Station Modification Report May 2020;
- ▶ The Sydney Metro Sydenham to Bankstown Staging Report;
- ▶ The Sydney Metro Construction Environmental Management Framework v3.2 (2017).

The Compliance Matrix in Section 2.2 provides a comprehensive list of compliance requirements, environmental documents and the contract documents.

Table 3 details the legislation and planning instruments considered during development of this Plan.

Table 3: Legislation and Planning Instruments

Legislation	Description	Relevance to this Plan
<b>Environmental Planning and Assessment Act 1979 (EP&amp;A Act)</b>	This Act establishes a system of environmental planning and assessment of development proposals for the State.	The approval conditions and obligations are incorporated into this SWMP.
<b>Contaminated Land Management Act 1997</b>	This Act provides for a process to investigate and remediate land that has been contaminated and presents a significant risk of harm to human health. Section 60 of the Act is a “Duty to Report Contamination”. This duty applies to owners of land and persons who become aware their activities have contaminated the land.	This Plan defines how the Project will manage works to comply with this Act
<b>Protection of the Environment Operations Act 1997 (POEO Act)</b>	This Act includes all the controls necessary to regulate pollution and reduce degradation of the environment, provides for licensing of scheduled development work, scheduled activities and for offences and prosecution under this Act.	This Plan defines how the Project will manage works to comply with this Act.

Legislation	Description	Relevance to this Plan
<b>Water Management Act 2000 Water Management (General) Regulation 2018</b>	This Act and Regulation provide for the protection, conservation and ecologically sustainable development of water sources of the State and in particular to protect, enhance and restore water sources and their associated ecosystems.	<p>This Act will have low relevance to the Project and will only be relevant if water is to be extracted.</p> <p>Projects assessed under Division 5.2 of the EP&amp;A Act are exempt from obtaining water use approval under section 89, a water management work approval under section 90 or an activity approval (other than an aquifer interference approval) under section 91. Provisions for aquifer interference approvals have yet to be enabled, as no proclamation has been made under Section 88 of the Water Management Act.</p> <p>Under the Clause 21(1) of the Water Management (General) Regulation 2018 (NSW), Transport Authorities are exempt from the requirement to hold an access licence. Transport Authorities are also exempt under Clause 34(1) of the Water Management (General) Regulation 2018 (NSW) from the requirement to hold a water use approval. Transport Authorities are not exempt from the requirement to hold a water supply work approval.</p>

## 2.1 Guidelines

Additional guidelines and standards to the management of soil and water include:

- ▶ Landcom (2004). Managing Urban Stormwater: Soils and Construction. (Volume 1 of the ‘Blue Book’);
- ▶ DECC (2008). Managing Urban Stormwater: Soils and Construction. Volume 2D: Main Road Construction. (Volume 2D of the ‘Blue Book’);
- ▶ ANZECC (2000). Australian and New Zealand Guidelines for Fresh and Marine Water Quality (collectively known as the ‘ANZECC Guidelines’);
- ▶ ANZECC (2018). Australian and New Zealand Guidelines for Water Quality Monitoring and Reporting (collectively known as the ‘ANZECC Guidelines’);
- ▶ ANZG (2018). Australian and New Zealand Guidelines for Fresh and Marine Water Quality (known as ‘ANZG Guidelines’);
- ▶ NSW Fisheries (2004). Guidelines for Controlled Activities, Policy and Guidelines for Fish-Friendly Waterway Crossings;
- ▶ NSW Fisheries (1999). Policy and Guidelines for Design and Construction of Bridges, Roads, Causeways, Culverts and Similar Structures;
- ▶ ASSMAC (1998). Acid Sulfate Soil Manual. Acid Sulfate Soil Management Advisory Committee, NSW;
- ▶ Sydney Metro - Water Discharge or Reuse Procedure;
- ▶ Guidelines for the Management of Acid Sulfate Materials: Acid Sulfate Soils, Acid Sulfate Rock and Monosulfidic Black Ooze, RTA;
- ▶ NSW Environmental Protection Authority - Assessing and Managing Acid Sulfate Soils;
- ▶ Environment Protection Authority, Victoria Information Publication 655 - Acid Sulfate Soil and Rock;
- ▶ Managing Land Contamination: Planning Guidelines SEPP 55 – Remediation of Land (Department of Urban Affairs and Planning and Environment Protection Authority, 1998);

- ▶ Acid Sulfate Soil Manual (Acid Sulfate Soil Management Advisory Committee, 1998);
- ▶ National Environment Protection (Assessment of Site Contamination) Amendment Measure (No. 1) 2013; and
- ▶ NSW EPA (2014) Waste Classification Guidelines.

## 2.2 Conditions of Approval

The CoA and REMM relevant to this SWMP are listed in Table 4. In accordance with CoA C4, the relevant requirements of the CEMF have also been included in Table 4. Table 4 also provides a cross reference to demonstrate where the relevant requirement is addressed in this SWMP or other management documents.

Please refer to Appendix A for all other CoA, REMM and CEMF requirements relevant to the development of this Plan.

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

Table 4: SWMP Compliance Matrix

No.	Requirement	Reference	How addressed?			
<b>Conditions of Approval</b>						
C3	<p>The CEMP Sub-plans must be prepared in consultation with the relevant government agencies identified for each CEMP Sub-plan and be consistent with the CEMF and CEMP referred to in Condition C1:</p> <table border="1"> <tr> <td>(b)</td> <td>Soil and water</td> <td>Relevant council(s), DoI, OEHL</td> </tr> </table>	(b)	Soil and water	Relevant council(s), DoI, OEHL	Section 1.4 Appendix D	This Plan has been prepared in accordance with this condition and describes how Downer proposes to manage soil and water during construction of the Project. This plan has been provided to CoCB, NRAR (formerly DoI) and EES (formerly OEHL) for consultation.
(b)	Soil and water	Relevant council(s), DoI, OEHL				
C4	The CEMP Sub-plans must be prepared in accordance with the CEMF	This Table	Table 4 demonstrates how this plan has been prepared in accordance with the relevant requirements of the CEMF.			
C5	Details of all information requested by an agency to be included in a CEMP Sub-plan as a result of consultation, including copies of all correspondence from those agencies, must be provided with the relevant CEMP Sub-Plan.	Section 1.4 Appendix D	This plan has been provided to CoCB, NRAR and EES for consultation.  Refer to Section 1.4 and Appendix D for a summary of consultation undertaken in the development of this Plan.			
C6	Any of the CEMP Sub-plans may be submitted along with, or subsequent to, the submission of the CEMP but in any event, no later than one (1) month before Construction.	Refer to section 1.2 of the CEMP	This Plan will be submitted for approval to DPE prior to the final submission of the CEMP for DPE approval.			
C7	Construction must not commence until the CEMP and all CEMP Sub-plans have been approved by the Planning Secretary. The CEMP and CEMP Sub-plans, as approved by the Planning Secretary, including any minor amendments approved by the ER must be implemented for the duration of Construction. Where Construction of the CSSI is staged, Construction of a stage must not commence until the CEMP and CEMP Sub-plans for that stage have been approved by the Planning Secretary.	Refer to section 1.2 of the CEMP	Construction did not commence until the CEMP and all CEMP Sub-plans were approved by DPE. The CEMP and Sub-plans are being implemented for the duration of construction.			
C8	<p>The following Construction Monitoring Programs must be prepared in consultation with the relevant government agencies identified for each to compare actual performance of Construction of the CSSI against the predicted performance.</p> <table border="1"> <tr> <td>(b)</td> <td>Water Quality</td> <td>Relevant council(s)</td> </tr> </table>	(b)	Water Quality	Relevant council(s)	Section 1.4 <b>Section Error! Reference source not found.</b> Appendix D	The Water Quality Monitoring Program has been prepared in accordance with this condition and describes how Downer proposes to monitor water quality during construction of the Project. The monitoring program has been provided to CoCB for consultation.
(b)	Water Quality	Relevant council(s)				
C9	Each Construction Monitoring Program must provide:	-	-			

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

No.	Requirement	Reference	How addressed?
	(a) details of baseline data available; (b) details of baseline data to be obtained and when;	Section 6.3	Details of the surface water baseline data available, as well as data to be obtained and when, during the development of the Water Quality Monitoring Program are presented in Section 6.3.
	(c) details of all monitoring of the project to be undertaken;	Section 6.4	The details of monitoring to be undertaken by the Project are described in Section 6.4 of this Plan.
	(d) the parameters of the project to be monitored;	Section 6.5	The parameters to be monitored by the Project are described in Section 6.5 of this Plan
	(e) the frequency of monitoring to be undertaken; (f) the location of monitoring;	Section 6.6	The frequency and location of monitoring to be undertaken by the Project are described in Section 6.6 of this Plan
	(g) the reporting of monitoring results;	Section 0	Section 0 of this plan details the reporting of monitoring results.
	(h) procedures to identify and implement additional mitigation measures where results of monitoring are unsatisfactory; and	Section 6.9	Procedures to identify and implement additional mitigation measures where results of monitoring are unsatisfactory are presented in Section 6.9 of this Plan.
	(i) any consultation to be undertaken in relation to the monitoring programs.	Section 1.4 Appendix D	Section 1.4 of this Plan details the consultation undertaken during the development of the Water Quality Monitoring Program.
C10	The Construction Monitoring Programs must be developed in consultation with relevant government agencies as identified in Condition C8 of this approval and must include reasonable information requested by an agency to be included in a Construction Monitoring Programs during such consultation. Details of all information requested by an agency including copies of all correspondence from those agencies, must be provided with the relevant Construction Monitoring Program.	Section 1.4 Appendix D	The Water Quality Monitoring Program has been prepared in accordance with this condition and describes how Sydney Metro's Principal Contractor proposes to monitor surface water quality during construction of the Project. The monitoring program has been provided to CoCB for consultation.
C11	The Construction Monitoring Programs must be endorsed by the ER and then submitted to the Planning Secretary for approval at least one (1) month before the commencement of Construction.	Refer to section 1.2 of the CEMP	The Water Quality Monitoring Program has been endorsed by the ER.  The Water Quality Monitoring Program has been submitted to DPE as part of this Soil and Water Management Plan for approval no later than one month prior to the commencement of construction activities.

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

No.	Requirement	Reference	How addressed?
C12	Construction must not commence until the Planning Secretary has approved all of the required Construction Monitoring Programs.	Refer to section 1.2 of the CEMP	Construction did not commence until the CEMP and Sub-plans, including relevant construction monitoring programs, were approved by DPE.
C13	The Construction Monitoring Programs, as approved by the Planning Secretary including any minor amendments approved by the ER must be implemented for the duration of Construction and for any longer period set out in the monitoring program or specified by the Planning Secretary, whichever is the greater.	Section 6.1	The Water Quality Monitoring Program has been implemented and will continue for the duration of construction as detailed in Section 6.1 of the Water Quality Monitoring Program.
C14	The results of the Construction Monitoring Programs must be submitted to the Planning Secretary, and relevant regulatory agencies, for information in the form of a Construction Monitoring Report at the frequency identified in the relevant Construction Monitoring Program.	Section 0	Section 0 details the reporting requirements and the frequency required for this reporting.
C15	Where a relevant CEMP Sub-plan exists, the relevant Construction Monitoring Program may be incorporated into that CEMP Sub-plan.	Section <b>Error! Reference source not found.</b>	The Water Quality Monitoring Program is incorporated in Section <b>Error! Reference source not found.</b> of this this Plan.
Revised Environmental Mitigation Measures			
FHW4	A construction water quality monitoring program would be developed and would commence prior to construction, to monitor water quality at identified discharge points. The program would include relevant water quality objectives, parameters, and criteria and specific monitoring locations identified in consultation with DPI (Water) and the EPA.	Section <b>Error! Reference source not found.</b>	The Water Quality Monitoring Program has been prepared in accordance with this condition and describes how Downer propose to monitor surface water quality during construction of the Project. The monitoring program has been provided to CoCB, DoI Water / NRAR and EPA for consultation.
Construction Environmental Management Framework			
15.2 (a)	Principal Contractors will develop and implement a Soil and Water Management Plan for their scope of works. The Soil and Water Management Plan will include as a minimum:	This SWMP	-
	i. The surface water and flooding mitigation measures as detailed in the environmental approval documentation.	Section 5 Appendix A	Section 5 of this Plan summarises the surface water and flooding mitigation measures as detailed in the environmental approval documentation.



## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

No.	Requirement	Reference	How addressed?
ii.	details of construction activities and their locations, which have the potential to impact on water courses, storage facilities, stormwater flows, and groundwater;	Section 4	Section 4 of this Plan details the Project's construction activities and which have the potential to impact upon soil and water.
iii.	surface water and ground water impact assessment criteria consistent with the principles of the Australian and New Zealand Environment Conservation Council (ANZECC) guidelines;	Section 2.1 Section 5.2.2 Section 5.5	Section 2.1 includes the guidelines that have been considered in the development of this Plan, including ANZECC. Section 5.2.2 of this Plan outlines the offsite discharge criteria to be utilised on this Project Section 5.5 of this Plan outlines the management of groundwater, consistent with the ANZECC guidelines.
iv.	management measures to be used to minimise surface and groundwater impacts, including identification of water treatment measures and discharge points, details of how spoil and fill material required by the SSI will be sourced, handled, stockpiled, reused and managed; erosion and sediment control measures; salinity control measures and the consideration of flood events;	Section 5 CEMP Appendix E	Section 5 of this Plan outlines the management measures to be implemented to minimise soil and water impacts. Refer to Appendix E of the CEMP for the Waste and Spoil Management Procedure
v.	a contingency plan, consistent with the Acid Sulfate Soils Manual (EPA 1998), to deal with the unexpected discovery of actual or potential acid sulfate soils, including procedures for the investigation, handling, treatment and management of such soils and water seepage;	Section 5.11	Section 5.11 of this Plan outlines how acid sulfate soils or potential acid sulfate soils are to be investigated, handled, treated and the management of such soils and water seepage.
vi.	management measures for contaminated material (soils, water and building materials) and a contingency plan to be implemented in the case of unanticipated discovery of contaminated material, including asbestos, during construction;	Section 5.7 Section 5.8 Section 5.9 Section 5.10 Section 5.11	Section 5.7 to 5.11 include the measures for the management of contaminated materials and the procedure to be implemented if unexpected contamination is encountered during construction.
vii.	a description of how the effectiveness of these actions and measures would be monitored during the proposed works, clearly indicating how often this monitoring would be undertaken, the locations where monitoring would take place, how the results of the monitoring would be recorded and reported, and, if any exceedance of the criteria is detected how any noncompliance can be rectified;	Section <b>Error!</b> <b>Reference source not found.</b>	The Water Quality Monitoring Program in Section <b>Error!</b> <b>Reference source not found.</b> of this Plan details how often monitoring would be undertaken, the locations of monitoring, the recording and reporting of results and adaptive management should exceedances be identified.

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

No.	Requirement	Reference	How addressed?
viii.	The requirements of any applicable EPL conditions.	Section 2.3 Appendix A	Section 2.3 and Appendix A of this Plan outlines the requirements of any applicable EPL conditions.
ix.	The responsibilities of key project personnel with respect to the implementation of the plan.	Section 2.4	Section 2.4 outlines the responsibilities of key personnel with respect to the implementation of this Plan.
x.	Procedures for the development and implementation of progressive erosion and sediment control plans.	Section 5.1.4	Section 5.1.4 outlines the development and implementation of progressive erosion and sediment control plans.
xi.	Identification of locations where site specific Stormwater and Flooding Management Plans are required.	-	Stormwater and Flooding Management Plans will be developed by the Principal Contractor, prior to Construction where constructions sites are within the 100-year ARI +10% increase in rainfall flood zone.
xii.	Compliance record generation and management.	Section 8 Section 10.2	Section 8 and 10.2 of this Plan describe compliance record generation and management.

## 2.3 Environment Protection Licence

At this stage, Sydney Metro’s Principal Contractor has not sought an Environment Protection Licence (EPL) from the NSW EPA.

If Sydney Metro’s Principal Contractor applies for an EPL for the Project, then this may include different or additional soil and water management requirements to the CoA. In this case, the Project’s SWMP will be updated to incorporate requirements of the EPL.

For soil and water elements of the Project’s scope, the Sydney Trains EPL 12208 has been included. The works will be managed in accordance with the railway track maintenance clauses presented in the table in Appendix A.

## 2.4 Roles and Responsibilities

The roles and responsibility of key personnel with respect to soil and water management are as follows in Table 5.

Table 5: Roles and Responsibilities

Roles	Responsibilities
<b>Project Director</b>	Managing the delivery of the Project including overseeing implementation of the soil, water and groundwater management Act as Contractor’s Representative
<b>Environment Manager</b>	Oversee the implementation of all soil, water and groundwater management initiatives Responsible for managing ongoing compliance with the CoA, REMM and environmental document requirements Monitoring and report and soil and water management during construction
<b>Commercial Manager</b>	Ensure that relevant soil, water and groundwater management requirements are considered in procuring materials and services
<b>Construction Managers Site Superintendent</b>	Manage the delivery of the construction process, in relation to soil, water and groundwater management across all sites in conjunction with the Environment Manager
<b>Sustainability Manager</b>	Track and report soil and water elements against sustainability targets
<b>Environment Advisor</b>	Manage the on-ground application of soil and water management measures during construction (e.g. erosion and sediment control, water treatment and monitoring) Monitor and report on soil and water management during construction
<b>Project Engineer</b>	Implement soil and water management activities during construction works
<b>Site Foreman (Site Superintendent)</b>	Monitor and report on erosion and sediment controls during construction works

Roles	Responsibilities
<p><b>Independent Environmental Representative (ER)</b></p>	<p>Receive and respond to communication from the Planning Secretary in relation to the environmental performance of the CSSI;</p> <p>Consider and inform the Planning Secretary on matters specified in the terms of this approval;</p> <p>Consider and recommend to the Proponent any improvements that may be made to work practices to avoid or minimise adverse impact to the environment and to the community;</p> <p>Review documents identified in Conditions C1, C3 and C8 and any other documents that are identified by the Planning Secretary, to ensure they are consistent with requirements in or under this approval and if so:</p> <ul style="list-style-type: none"> <li>• (i) make a written statement to this effect before submission of such documents to the Planning Secretary (if those documents are required to be approved by the Planning Secretary), or</li> <li>• (ii) make a written statement to this effect before the implementation of such documents (if those documents are required to be submitted to the Planning Secretary for information or are not required to be submitted to the Secretary);</li> </ul> <p>Regularly monitor the implementation of the documents listed in Conditions C1, C3 and C8 to ensure implementation is being carried out in accordance with the document and the terms of this approval;</p> <p>As may be requested by the Planning Secretary, assist the Department in the resolution of community complaints;</p> <p>Consider any minor amendments to be made to the documents listed in Conditions C1, C3 and C8 and any document that requires the approval of the Planning Secretary that comprise updating or are of an administrative or minor nature and are consistent with the terms of this approval and the documents listed in Conditions C1, C3 and C8 or other documents approved by the Planning Secretary and, if satisfied such amendment is necessary, approve the amendment. This does not include any modifications to the terms of this approval; and</p> <p>Prepare and submit to the Planning Secretary and other relevant regulatory agencies, for information, an Environmental Representative Monthly Report detailing the ER's actions and decisions on matters for which the ER was responsible in the preceding month. The Environmental Representative Monthly Report must be submitted within seven (7) days following the end of each month for the duration of the ER's engagement for the CSSI.</p>

It is noted that the site team, including Downer's Environmental Manager, Environment Advisor, Construction Manager and Site Foreman/Site Superintendent will attend site inspections with the ER upon request.

The ER may request information relating to soil and water management from Downer, the primary contact being the Environment Manager.

### 3 EXISTING ENVIRONMENT

The following sections summarise what is known about the factors influencing soils and water within and adjacent to the Project. The information within the section is high-level in nature and not exhaustive. Downer will be responsible for reviewing all available information and managing any environmental risks accordingly.

The key reference document is Chapters 20 and 21 of the EIS.

#### 3.1 Topography

The area within and adjacent to the Sydenham to Bankstown rail corridor ranges in elevation from the lowest point, which is about 3.5 metres above Australian height datum near Marrickville Station, to the highest point, which is about 36 metres above Australian height datum near Wiley Park Station. Bankstown Station is located about 23 metres above Australian height datum.

Between Punchbowl and Bankstown stations, the project area is located on or near a localised ridgeline. East of Punchbowl Station, the natural topography varies through a series of ridges and gullies. Between Marrickville and Sydenham stations, the project area is located in low-lying terrain.

#### 3.2 Geology

The Project sites traverse a number of regional geological units identified by the *Sydney 1:100,000 Geological Sheet 9130* (Herbert, 1983).

Section 20.2.2 of the EIS identifies the following regional geological units within the Project's footprint:

- ▶ Fill – located through numerous parts of the site, particularly within embankments;
- ▶ Quaternary Sediments – alluvium and estuarine deposits near Marrickville Station;
- ▶ Wianamatta Group – includes Ashfields shales between Canterbury and Punchbowl Stations and Minchinbury Sandstone near Wiley Park Station;
- ▶ Mittagong Formation – between Dulwich Hill and Canterbury Stations;
- ▶ Hawkesbury Sandstone – between Marrickville and Canterbury Stations; and
- ▶ Dykes – Volcanic intrusions at Marrickville, Canterbury and Bankstown Stations.

##### 3.2.1 Soil landscapes

The Project area traverses three soil landscape types identified by the *Sydney 1:100,000 Soil Landscape Sheet Series 9130* (Herbert, 1983). These include Birrong, Gymea and Blacktown soil units.

These soil landscape types are described as follows:

- ▶ **Birrong:** Soils – deep (>250 cm) yellow podzolic soils and yellow solodic soils on older alluvial terraces
- ▶ **Gymea:** Soils – shallow to moderately deep yellow earths and earthy sands on crests and on the inside of benches
- ▶ **Blacktown:** Soils – shallow to moderately deep hard setting mottled texture contrast soils, red and brown podzolic soils on crests grading to yellow podzolic soils on lower slopes and in drainage lines

It is noted that the Project area is highly disturbed and soils across the station sites likely include imported materials.

*Figure 1 indicates the soil units across the Project.*

# Soil and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

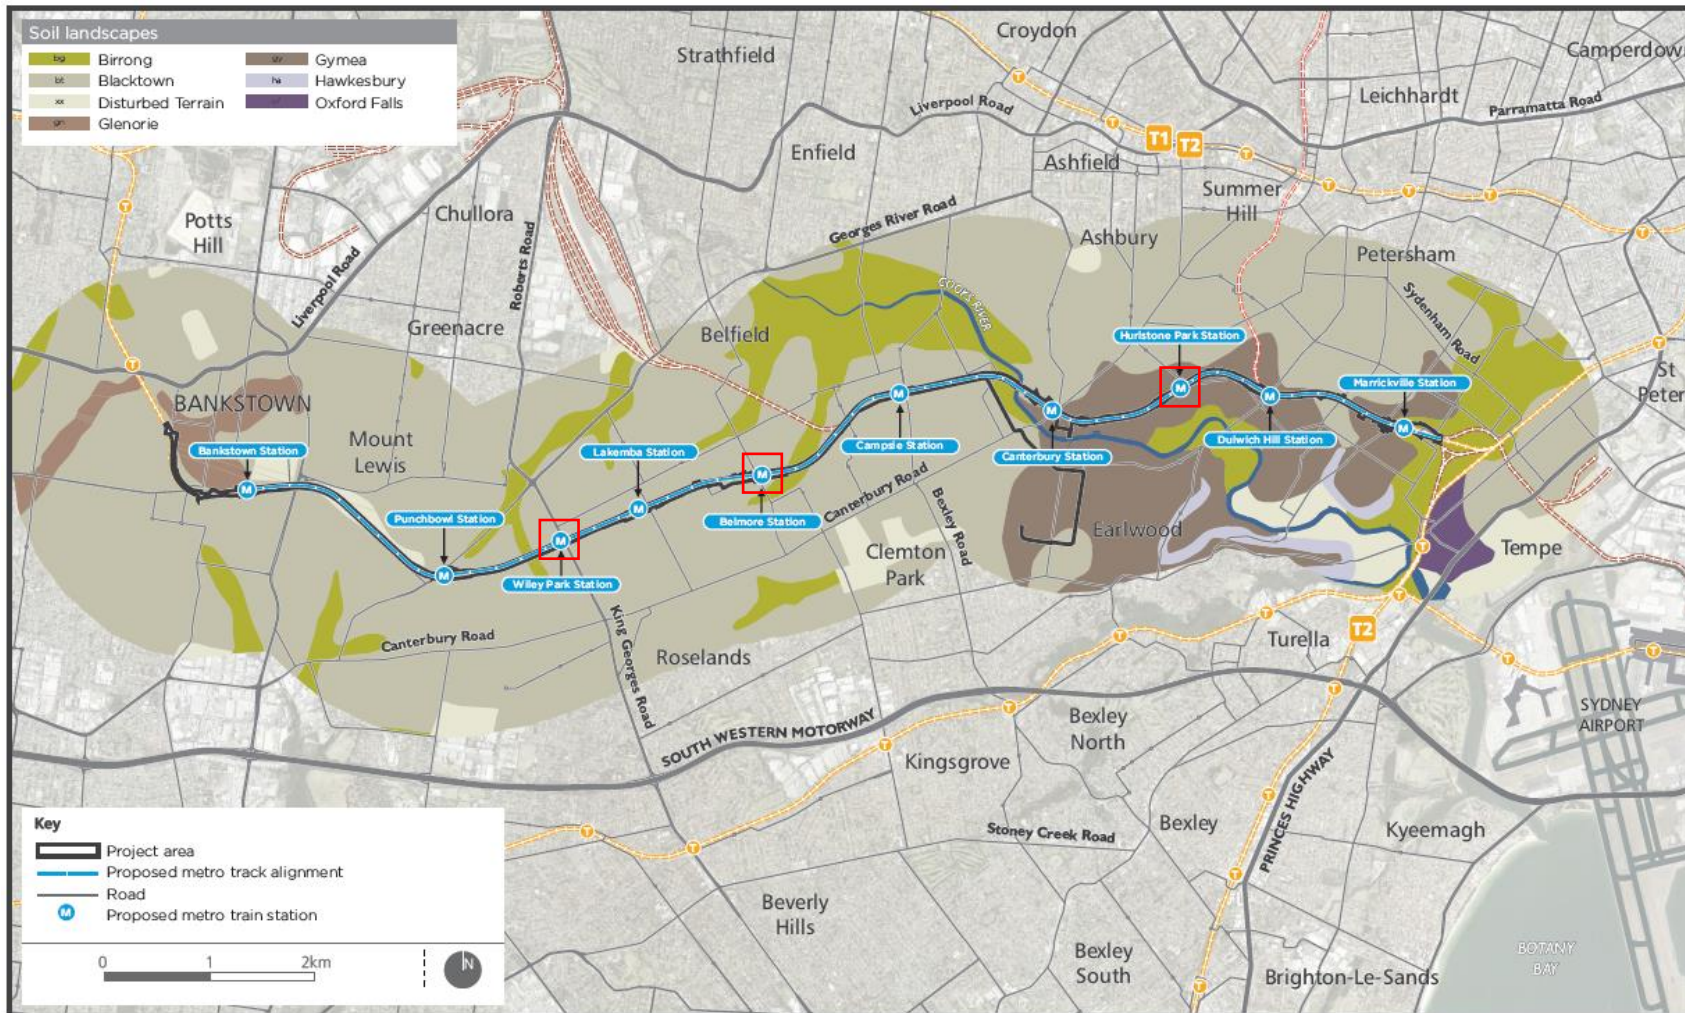


Figure 1 Soil landscapes along the project alignment. Indicative project areas shown in red.

### 3.2.2 Soil salinity

Salinity in the Project area was considered within the EIS. Based on the content of the EIS there was no evidence of soil salinity within the Project area. The relevant soil salinity mapping has been extracted from the EIS and is included in Figure 2. The EIS concluded that “... *potential saline soils are located west of Punchbowl Station. The remainder of the Project area is not mapped as having salinity potential. However, there may be areas of salinity potential in these areas.*”

As the Project sites are not located within areas with salinity potential, REMM SC3 is not relevant to the Project.

### 3.2.3 Acid Sulfate soils

Acid sulfate soils (ASS) are the common name given to naturally occurring sediments and soils containing iron sulphides (principally iron sulphide or iron disulphide or their precursors). Exposure of the sulphide in these soils to oxygen as a result of drainage or excavation leads to the generation of sulphuric acid. Areas of acid sulfate soils can typically be found in low-lying and flat locations that are often swampy or prone to flooding.

In accordance with the Australian Soil Resource Information System (CSIRO, 2015) parts of the rail corridor between Sydenham and Bankstown has been deemed to have a high potential for the presence of Acid Sulfate Soils, particularly the area near the Cooks River. Refer to Figure 2 for mapping.

Sydney Metro City & Southwest Sydenham to Bankstown upgrade: Technical Paper – Contamination Assessment Report (GHD, 2017) has reviewed available information on Acid Sulfate Soil and states;

*“Marrickville Station to Section D (country side of Hurlstone Park Station) – A review of the mapping indicates that there is unlikely to be occurrences of ASS.*

*Canterbury Station – The western quarter of the Canterbury Station has been mapped as ‘disturbed terrain’; and there is potential for ASS to depths varying between 2 and 4 m below ground level.*

*Section E (country side of Canterbury Station to city side of Campsie Station) – The eastern half of section E has been mapped as having a low risk of acid sulfate soils (at two to four metres below ground surface) and ‘disturbed terrain’ on the western and eastern sides of the Cooks River, respectively.*

*Campsie Station to Section K (Bankstown Station) – A review of the mapping indicates that there is unlikely to be occurrences of ASS.”*

With regards to the Project Area the EIS reports a Class 5 risk of encountering ASS within or adjacent to the Project sites at Hurlstone Park, Belmore and Wiley Park Stations. Refer to Figure 2 for the EIS mapping.

Downer’s management of ASS and PASS will occur in accordance with Section 5.11 of this Plan and Downer’s Acid Sulfate Soils Management Standard (DG-ZH-ST068.2).

# Soil and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

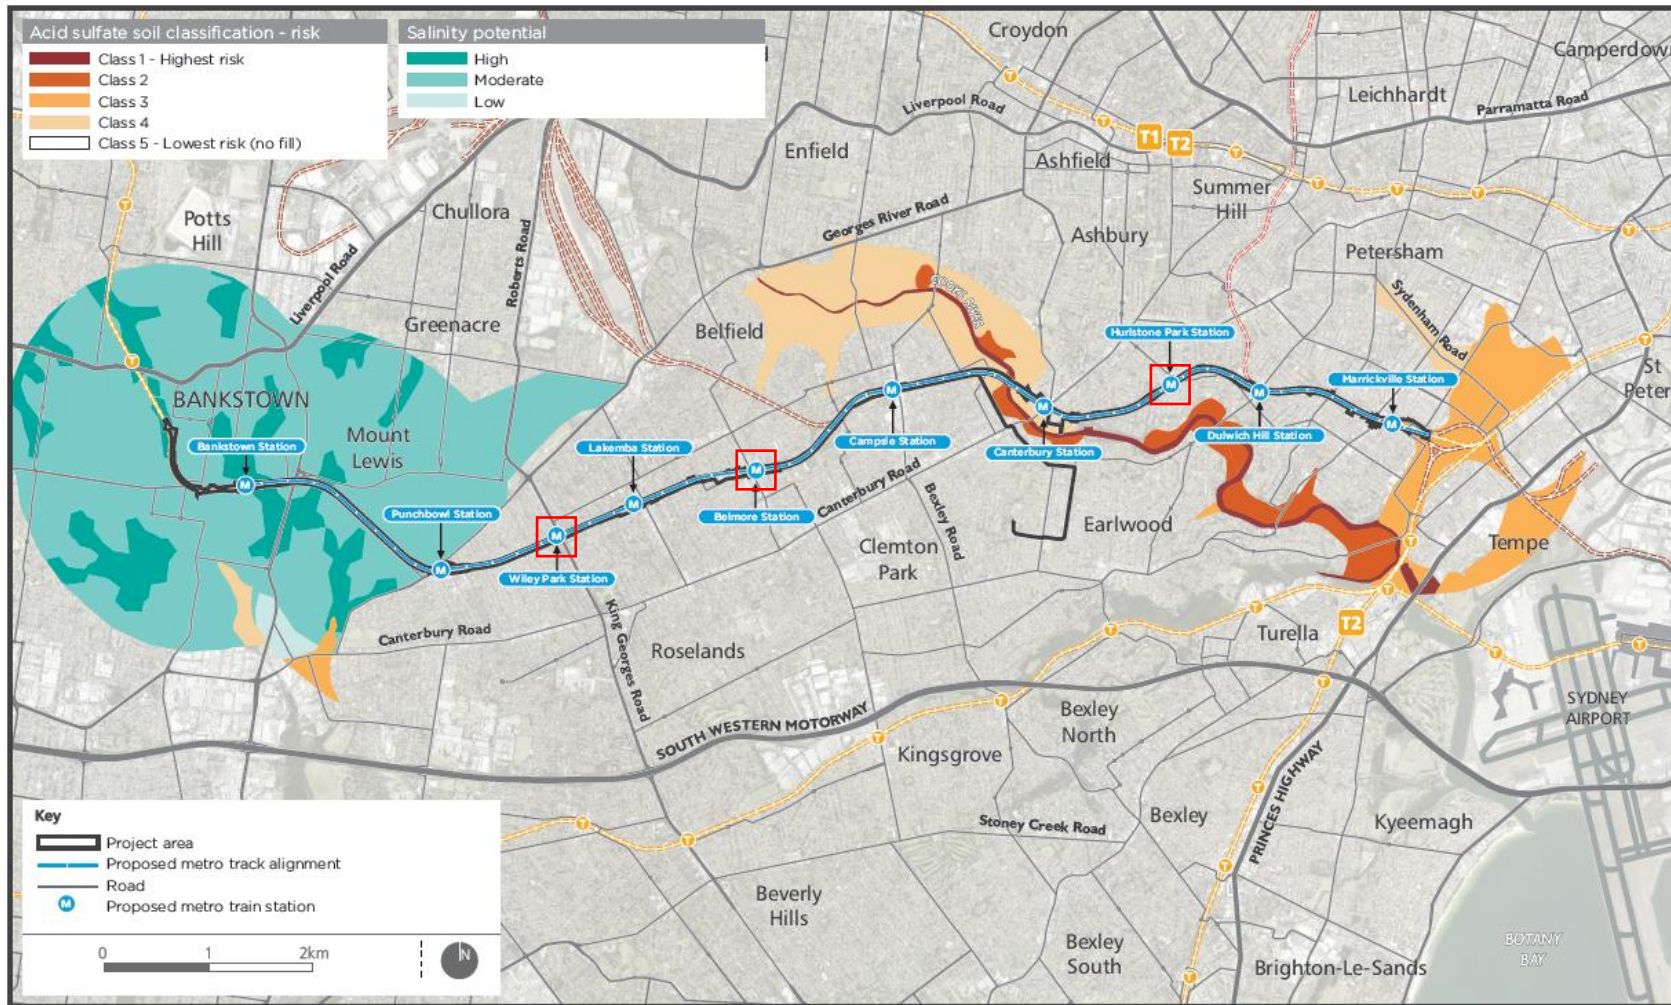


Figure 2 Salinity potential and ASS risk. Indicative project areas shown in red.



### 3.3 Contamination

The Sydenham to Bankstown rail corridor has been part of an operational rail corridor for more than 130 years. A Phase 1 contamination assessment for the existing rail corridor between Sydenham and Bankstown Stations was carried out by GHD as part of the development of the EIS. The Phase 1 assessment included a desktop review and site visit. Chapter 20 of the EIS references the preliminary site assessment which concluded; *“that there is a risk of contamination along the length of the project area, albeit a low to medium risk for the majority of the project area, with potential contamination sources being historical rail activities, and commercial and residential land use in surrounding areas.”* Contaminants of potential concern (COPC) associated with the use of railway include:

- ▶ Asbestos;
- ▶ Hydrocarbons;
- ▶ Heavy metals; and
- ▶ Herbicides.

Areas identified in the EIS with a medium to high contamination risk along the Sydenham to Bankstown rail corridor are detailed in Table 6.

Table 6: Areas with a medium to high contamination risk along the rail corridor

Location	Potential contamination sources	Potential contaminants present	Location in relation to the nearest Project site
Between Sydenham and Marrickville stations	Previous site investigations identified asbestos in soil and petroleum aromatic hydrocarbons in groundwater north of the project area, at 361 Victoria Road	Within the vicinity of 361 Victoria Road: Asbestos in soil Petroleum aromatic hydrocarbons in groundwater	> 2km east of the Hurlstone Park Station site
Between Campsie and Belmore stations (triangular area within the rail corridor)	Historical rail activities Historical commercial and residential land use	Arsenic in ballast Asbestos Hydrocarbons (including chlorinated hydrocarbons in fill) Heavy metals (including in groundwater) Herbicides	> 500m east of the Belmore Station site
Between Punchbowl and Bankstown stations (car park at North Terrace)	Historical rail activities Historical commercial and residential land use	Asbestos Hydrocarbons (in soil and groundwater) Heavy metals Herbicides	>2.5km west of the Wiley Park Station site

Table 6 identifies that there are no medium to high contamination risk sites within proximity of the Project.

Chapter 20 of the EIS states that no sites listed on the EPA’s contaminated land register are located within 100 metres of the Sydenham to Bankstown rail corridor. However, three sites which have been notified to the EPA are located within 100 metres of the rail corridor. These are listed in Table 7. Table 7 identifies that the 348 Belmore Road site is located within the Belmore Station site. In accordance with REMM SC4, WorkCover dangerous goods searches will be carried out by Downer for properties that have potential contamination near Belmore Station, to provide additional site characterisation and identify the risk of contamination in these areas. Downer’s DG-ZH-PR068 Contamination Management Procedure refers to the identification and management of potentially contaminated land associated with acquisition (purchase or lease) and divestment (sale or lease/ sublease) of land (i.e. that a PSI (Preliminary Site Investigation (PS) and/or Detailed Site Investigation (DSI) has been undertaken).

Table 7: Registered contaminated sites

Suburb	Site name and address	Site activity	Contamination status	Location in relation to the nearest Project site
Marrickville	Way Street	XPT Maintenance Facility, other industry	Regulation under CLM Act not required	>2km east of the Hurlstone Park Station site
Marrickville	2 Carrington Road	Unclassified	Regulation under CLM Act not required	>2km east of the Hurlstone Park Station site
Belmore	348 Burwood Road	Rail land, unclassified	Regulation under CLM Act not required	Within the Belmore Station site

Due to the history of the rail corridor and surrounding development, Phase 2 contamination testing has been undertaken across the rail corridor and at stations. These assessments include;

- ▶ City & Southwest, Sydney Metro Sub-portion 2 - Sydenham to Bankstown Targeted Contamination Assessment (GHD 2017);
- ▶ Sydney Metro City and Southwest Sydney Metro, Sub-portion 1: Sydenham to Bankstown Station Platforms Contamination Assessment (GHD 2017); and
- ▶ Southwest Corridor Conversion Enabling Works – Tranche 1B Contamination Assessment Report (AGJV 2019).

Table 8 summarises exceedances of screening criteria within 100m of the Project sites, as published in the Targeted Contamination Assessment (GHD 2017).

Table 8: Targeted Contamination Assessment exceedances in proximity to the Project

ID	Location	Summary of exceedance of screening criteria
<b>Hurlstone Park Station</b>		
N/A	N/A	No exceedances of screening criteria were identified in proximity to Hurlstone Park Station.
<b>Belmore Station</b>		
BH107	North of station platform	Chrysotile and amosite asbestos was detected in fibre cement fragments at BH107 (depth of 0.1 to 0.2m)
<b>Wiley Park Station</b>		
BH135	Adjacent to Platform 1	Chrysotile and amosite asbestos was detected in fibre cement fragments at BH135 (depth of 0.1 to 0.2m)

The Targeted Contamination Assessment states that the conceptual site model is complete and any contaminants, including those listed above, can be “*managed by using appropriate PPE and management measures.*” These measures are included within Section 5 of this Plan.

AGJV’s investigations (boreholes / test pits) between Sydenham and Campsie Stations suggested that concentrations of COPC in fill soil are below the adopted human health screening criteria for commercial / industrial land use and adopted management limits. AGJV’s Tranche 1B Contamination Assessment Report Refined Conceptual Site Model identifies the inhalation of airborne (asbestos) fibres as a potential pathway to receptors and recommends that an Asbestos Management Plan with an appropriate unexpected finds procedure is developed and implemented for the works. Refer to Section 5.9 for asbestos mitigation measures.

GHD's Platforms Contamination Assessment (GHD 2017) report included the results of an intrusive soil investigation at each station. At Belmore Station, GHD reported the detection of chrysotile asbestos in BMBH01 (depths of 0.1-0.2 m). No exceedances of screening criteria were reported at Hurlstone Park and Wiley Park Station platforms. Based on the findings of the investigation, the Platforms Contamination Assessment concluded that *“asbestos management and unexpected finds protocol should be included in the construction management plan for the development of rail infrastructure or any other intrusive land development or construction works”*. Refer to Section 5.9 for asbestos mitigation measures and Appendix B for the Unexpected Contaminated Land Procedure and Asbestos Finds Procedure.

REMM SC7 states *“In the event a Remediation Action Plan is required, it would be developed in accordance with Managing Land Contamination: Planning Guidelines SEPP 55 – Remediation of Land (Department of Urban Affairs and Planning and Environment Protection Authority, 1998) and a NSW Environment Protection Authority Accredited site auditor would be engaged to audit the works.”* Based on the results of the contamination assessments, a Remediation Action Plan is not required. Should a Remediation Action Plan be required, it will be developed by the Principal Contractor in accordance with *Managing Land Contamination: Planning Guidelines SEPP 55 – Remediation of Land (Department of Urban Affairs and Planning and Environment Protection Authority, 1998)* and a NSW Environment Protection Authority Accredited site auditor would be engaged to audit the works.

It is noted that the construction process may lead to the disturbance and mobilisation of existing contamination, or may result in the addition of new contamination to soil, surface water or groundwater via spills or leaks of fuels, oils or other hazardous materials. The risk of contamination arising through the construction process will be mitigated by implementing Downer's Contamination Management Procedure (DG-ZH-PR068) is applicable and describes how and when potential contamination risks are identified and managed.

### 3.3.1 Hazardous materials

A hazardous materials assessment of buildings and structures was conducted by GHD in September 2016, which focused on stations along the rail corridor - *City and Southwest Metro Asset Condition Assessment – Hazardous Materials Assessment (GHD 2016)*. The scope of this assessment was limited to a visual re-inspection of previously identified hazardous materials and an inspection, with limited sampling, for potential hazardous materials not noted on existing registers.

The assessment inspected the following locations relevant to this Project:

- ▶ Hurlstone Park Station – Concourse, station master's office, station building;
- ▶ Belmore Station – Concourse, station master's office, station building, shops adjacent to station, substation; and
- ▶ Wiley Park Station – Concourse, station building.

For the purposes of GHD's assessment, the hazardous materials assessed included:

- ▶ Asbestos containing materials;
- ▶ Synthetic mineral fibre;
- ▶ Polychlorinated biphenyls (PCB) capacitors within light fittings;
- ▶ PCB oils within transformers and other electrical equipment; and
- ▶ Leaded paint systems and lead contaminated dust.

The report summarised that the following materials were identified or presumed as containing asbestos:

- ▶ Flat cement sheeting;
- ▶ Corrugated cement sheeting;
- ▶ Asbestos containing cement sheeting debris;
- ▶ Asbestos containing vinyl floor tiles;
- ▶ Asbestos containing gaskets;

- ▶ Asbestos containing textile wrap;
- ▶ Asbestos containing fuse;
- ▶ Resinous board; and
- ▶ Pipe conduit.

The assessment assigns the asbestos instances a 'Very High Risk' status as refurbishment and/or demolition related activities are likely to impact on these instances.

Other hazardous materials that were identified include:

- ▶ Synthetic mineral fibres in insulation to underside of roof, acoustic ceiling tiles and insulation to ceiling cavities;
- ▶ Polychlorinated Biphenyls (PCB) capacitors within fluorescent light fittings;
- ▶ PCB oil within transformers;
- ▶ Leaded paint systems to interior and exterior surfaces; and
- ▶ Lead-contaminated dust.

The assessment assigned the above instances a 'Very High Risk' status as refurbishment and/or demolition related activities are likely to impact on these instances.

This assessment was undertaken only in nominated areas where access was readily available. In accordance with REMM SC6, Downer will conduct hazardous materials surveys in accordance with Downer's Zero Harm Risk Management Procedure (DG-ZH-PR028) for all proposed demolition activities, and for utility adjustments as required, prior to these works commencing.

All reasonable and feasible management recommendations outlined in City and Southwest Metro Asset Condition Assessment – Hazardous Materials Assessment (GHD 2016) will be implemented by Downer.

### 3.4 Groundwater

Chapter 21 of the Sydney Metro City & Southwest: Sydenham to Bankstown EIS makes the following statements in regards to groundwater;

- ▶ *"The groundwater level along most of the project area was recorded at between about 2.3 metres below ground level (to the east of the project area in Marrickville) and about 10.3 metres below ground level (near Bankstown Station)."*
- ▶ *"Groundwater has been observed discharging from open cuttings along the rail corridor. The surface groundwater system is likely to be recharged by rainfall and percolation from irrigation of residential gardens and open spaces, as well as incidental runoff from impervious surfaces, such as roads and footpaths."*
- ▶ *"Quaternary alluvium underlies the Cooks River and its tributaries and forms an aquifer. Groundwater is also present within localised alluvial deposits in some gullies. Groundwater salinity within the Quaternary alluvium and localised alluvial deposits is expected to vary from lower salinity in the upper reaches of the Cooks River, to higher salinity in the lower reaches due to mixing and tidal influences."*

An assessment of groundwater quality from previous studies is included within the City & Southwest, Sydney Metro Sub-portion 2 - Sydenham to Bankstown Targeted Contamination Assessment (GHD, 2017) has noted the following;

- ▶ Slightly elevated levels of copper, zinc and chromium were identified in groundwater between Campsie and Belmore Stations.

Testing of groundwater within the City & Southwest, Sydney Metro Sub-portion 2 - Sydenham to Bankstown Targeted Contamination Assessment (GHD, 2017) found;

- ▶ A groundwater well was established approximately 170 metres to the east of Belmore Station to a depth of 5.9m below top of casing (bTOC). No groundwater was encountered within this well. No groundwater wells were established within proximity of the Hurlstone Park or Wiley Park Station sites;
- ▶ *“All groundwater samples reported one or more analysed metal (copper, mercury, nickel or zine) concentrations above the groundwater investigation level (GIL) for protecting freshwater aquatic ecosystems. These elevated heavy metal concentrations are likely representing the background levels of the groundwater aquifer in the investigation area and the Sydney basin”;*
- ▶ Concentrations of TRH, BTEX, PAHs, OCP, OPP and PCB in all groundwater samples were below the adopted health screening criteria for commercial and industrial land use and the adopted GIL; and
- ▶ pH of groundwater was between pH4.4 and pH 6.7.

Should groundwater be encountered during works it will be managed and should that groundwater need to be dewatered, the primary approach would be to dewater the groundwater to a nearby water body, if ANZG/ANZECC Guideline criteria is met. Where groundwater cannot be stored and treated to meet ANZG/ANZECC guideline criteria, Sydney Metro’s Principal Contractor will dispose of the groundwater in accordance with the NSW Waste Classification Guidelines.

It is noted that construction processes, if not managed appropriately, could lead to contamination of groundwater via spills and leaks. Management measures outlined in Section 5 and Appendix E of CEMP will mitigate the risk of impact to groundwater quality. Downer’s Contamination Management Procedure DG-ZH-PR068 includes reference to sampling and laboratory analysis of groundwater as part of the DSI, mentioned above.

### 3.5 Surface water

#### 3.5.1 Catchments and waterways

The Project sites form part of the overall Cooks River catchment with water from the area discharging into the Cooks River via local stormwater drainage or overland flow. The catchment area and waterways is highly urbanised with mixed residential, commercial and industrial properties. Waterways within this catchment are largely artificial, hard-lined (e.g. concrete channel, piped channel, brick channel) stormwater channels, with the exception of the Cooks River.

The EIS states *“The Cooks River catchment, located in the inner to middle south-western suburbs of Sydney, has an area of about 102 square kilometres. The majority of the catchment is highly developed. The Cooks River itself is about 23 kilometres long, and flows from Chullora in the west to Botany Bay in the east. The river discharges into the north of Botany Bay, near Sydney Airport. The river is tidally influenced as far as South Enfield. Major tributaries of the river include:*

- ▶ *Coxs Creek*
- ▶ *Cup and Saucer Creek*
- ▶ *Wolli Creek*
- ▶ *Alexandra Canal*
- ▶ *Muddy Creek*
- ▶ *Eastern Channel*
- ▶ *Western Channel.”*

It is noted that in accordance with REMM FHW7, works within or near watercourses (including the Cooks River) would be undertaken with consideration given to the NSW Office of Water’s guidelines for controlled activities. Given no works are proposed within watercourses, REMM FHW7 is not relevant to the Project.

The station upgrades and service building construction at Hurlstone Park, Belmore and Wiley Park have a footprint limited to the existing station areas, their immediate precincts and the rail corridor. The Project does not propose any direct impacts or modifications to existing watercourses. The closest Project worksite to an existing watercourse is Wiley Park Station services building, which is located approximately 100m from an unnamed concrete lined channel, which forms the upper reaches of the Cox Creek and is identified as a first-order stream in Figure 3.

Figure 3 indicates the catchments and stream order of waterways for the area, as published in the EIS.

To manage the risk associated with activities on or near water, where applicable, Downer's Working On or Near Water Procedure (DG-ZH-PR136) will be applied at all times.

# Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

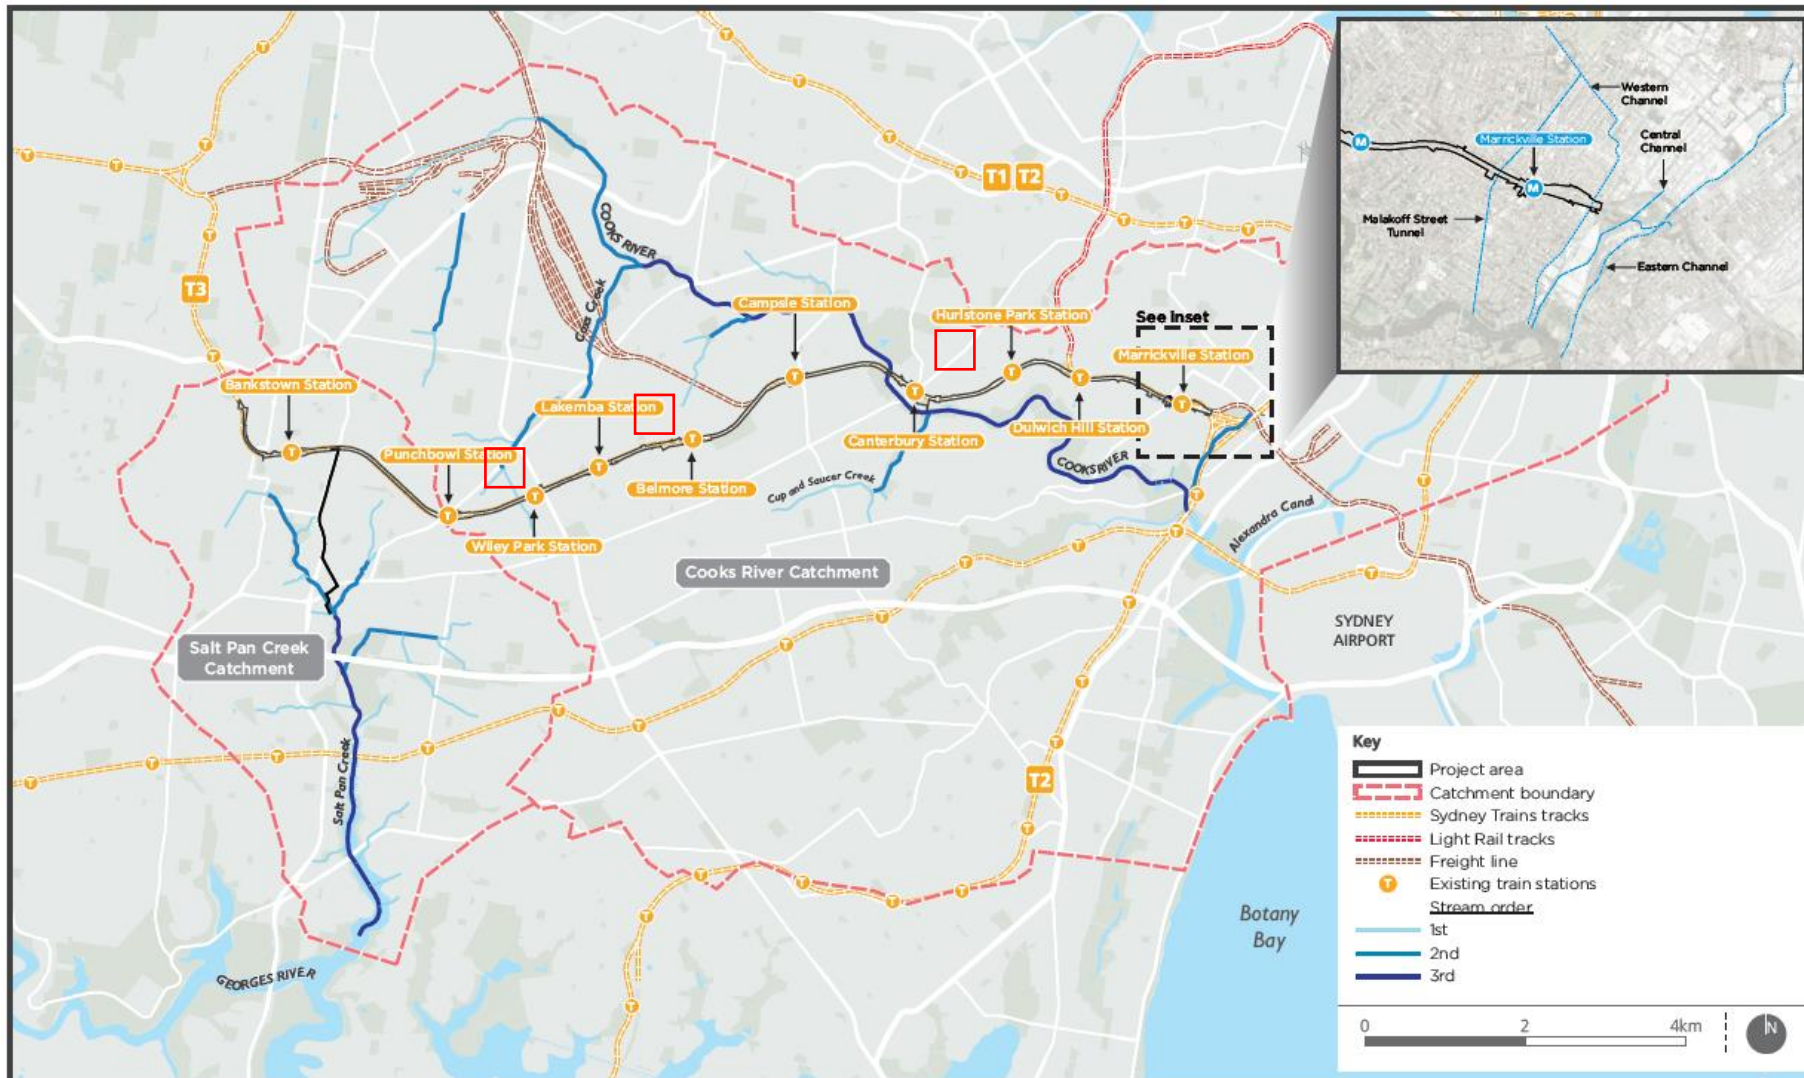


Figure 3 Catchment area and watercourse locations. Indicative project areas shown in red.

### 3.5.2 Surface water quality

Water courses within the catchment are heavily urbanised, with stormwater collected by developed stormwater networks and the Cooks River. Surface water quality in the project area is influenced by several factors including:

- ▶ Current and former polluting land uses within the catchment;
- ▶ Stormwater and sewage overflows and leachate from contaminated and/or reclaimed land;
- ▶ Urbanisation of the catchments and subsequent reduction in permeable area, increasing run-off and pollutant loads entering waterways; and
- ▶ Illegal dumping.

Water quality is measured on an ongoing basis for the wider Cooks River catchment by the NSW EESG as part of the Beachwatch programme. The monitoring point is at Kyeemagh Baths at the mouth of the Cooks River in Port Botany. Water quality within the Cooks River catchment is influenced by stormwater, fertilisers, industrial discharges and sewage contamination.

Limited background water quality data is available for the Cooks River through monitoring undertaken by the Cooks River Alliance. However, the most recent data available is from 2013/2014 and monitoring was not undertaken in close proximity to the Project area.

Refer to Section 5 for erosion and sediment controls measures to be implemented during construction.

## 3.6 Flooding

Chapter 21 of the EIS cites the draft *Overland Flow Study Canterbury LGA Cooks River Catchment* (Cardno 2016) for the Cooks River Catchment and the *Salt Pan Creek Stormwater Catchment Study* (Bankstown City Council 2011).

The EIS summarises the flooding and drainage issues occurring in the remainder of the alignment between Sydenham and Bankstown Stations. The flooding conditions relevant to this Project are summarised below.

### Hurlstone Park Station

Chapter 21 of the EIS states that overland flooding into the rail corridor occurs in some locations between Dulwich Hill and Canterbury Station, where existing cross drainage capacity is exceeded. No substantial overland flooding or flooding potential is identified in the EIS at Hurlstone Park Station.

### Belmore Station

The EIS identifies local drainage capacity constraints outside the rail corridor in some locations near Belmore Station. The EIS also concludes that the rail alignment is in fill at Belmore Station, therefore there are no predicted overland flood issues.

### Wiley Park Station

Chapter 21 of the EIS reports limited cross drainage capacity at Wiley Park Station, however the rail line is mostly in fill.

The Hurlstone Park, Belmore and Wiley Park services buildings are located outside of the 100 year ARI flood zone based on the existing flood studies. The design of these buildings are not anticipated to impact upon the local flooding regime.

In accordance with REMM FHW1, the Hurlstone Park, Belmore and Wiley Park services buildings have been designed to ensure there is no increase in stormwater runoff rates. As the addition of these buildings results in an increase of impervious area, on-site detention in the form of on-site detention (OSD) tanks have been provided as part of the design to reduce flows.



## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105



Management measures outlined in Section 5.4 will be implemented by Downer during the construction planning and construction phase of the Project to minimise flooding impacts.

The minimum requirements for work activities involving excavation, shafts, pits, trenches and tunnelling to be conducted in a safe, legal and competent manner in accordance with Downer's Excavation, Trenching and Services Standard (DG-ZH-ST043).

Prior to a potential flood the emergency plans must be communicated to workers and be prepared and practised in accordance with Downer's Emergency Management Procedure (DG-ZH-PR015).

## 4 ENVIRONMENTAL ASPECTS AND IMPACTS

### 4.1 Construction activities

Key construction activities that could result in adverse impacts to soils and surface water are listed below along with Downer Standards, Procedures and Permits to be adhered:

- ▶ Vegetation clearing and topsoil stripping;
  - Flora and Fauna Management Standard (DG-ZH-ST071.2)
  - Land or Vegetation Disturbance Permit (DG-ZH-FM071.3)
- ▶ Environmental Inspection Checklist (DG-ZH-FM116.2) Bulk earthworks;
  - Excavation, Trenching and Services Standard (DG-ZH-ST043)
  - Excavation Permit (DG-ZH-FM043.1)
- ▶ Construction and use of site accesses;
  - Environmental Inspection Checklist (DG-ZH-FM116.2)
- ▶ Drainage works;
  - Water Discharge Management Standard (DG-ZH-ST064)
  - Water Release Permit (DG-ZH-FM064.4)
  - Excavation Permit (DG-ZH-FM043.1)
- ▶ Material stockpiling including the treatment of acid sulfate soil and rock;
  - Acid Sulfate Soils Management Standard (DG-ZH-ST068.2)
  - Waste Disposal Register (DG-ZH-FM063.1)
  - Waste Estimation Record (DG-ZH-FM063.2)
- ▶ Water use; and
  - Water Discharge Management Standard (DG-ZH-ST064) (refer to Appendix F)
  - Working On or Near Water Procedure (DG-ZH-PR136)
  - Water Release Permit (DG-ZH-FM064.1) (refer to Appendix G)
- ▶ Operations at site compounds including fuel and chemical storage, refuelling and chemical handling.
  - Hazardous Chemicals and Dangerous Goods Standard (DA-ZH-ST024)
  - Zero Harm Risk Management Procedure (DG-ZH-PR028)
  - Hazardous Chemicals and Dangerous Goods Risk Assessment (DG-ZH-FM024.1)
  - Hazardous Chemicals and Dangerous Goods Storage Principles and Transportation (DG-ZH-ST054).

The key aspects and potential impacts associated with the management of soil and water during the delivery of the Project are listed in Table 9.

Table 9: Aspects and potential impacts

Aspects	Potential impacts
<b>Discharge of contaminated water from within site boundary during rainfall</b> <b>Concrete washout</b>	<ul style="list-style-type: none"> <li>• Contamination of adjacent watercourse</li> <li>• Contamination of soils</li> </ul>
<b>Dust generated by vehicles</b>	<ul style="list-style-type: none"> <li>• Potential pollution of waterways and air</li> </ul>
<b>Vegetation clearing and topsoil stripping</b>	<ul style="list-style-type: none"> <li>• Sediment degrading surrounding environment</li> <li>• Runoff entering drainage lines causing pollution and impacting aquatic life in the catchment</li> </ul>

Aspects	Potential impacts
<b>Earthworks / Embankment works/ Platform excavation works / Service building works</b>	<ul style="list-style-type: none"> <li>• Potential spread of contamination into soils /surface or groundwater</li> <li>• Personnel exposure to contaminants</li> <li>• Sediment degrading surrounding environment</li> <li>• Change to flooding characteristics</li> </ul>
<b>Flooding of worksites</b>	<ul style="list-style-type: none"> <li>• Contamination of floodwaters by sewage, fuels and/or chemicals onsite</li> </ul>
<b>Leaks or spillages of fuels, oils and grease from construction plant and equipment and at compounds</b>	<ul style="list-style-type: none"> <li>• Contamination of soil</li> <li>• Contamination of watercourse, riparian environment and groundwater ecosystems</li> <li>• Personnel exposure to contaminants</li> </ul>
<b>Disturbance of Potential Acid Sulfate soils and Actual Acid Sulfate Soils during excavations.</b>	<ul style="list-style-type: none"> <li>• Mobilisation of metals within runoff to levels toxic to natural systems</li> <li>• Release of acidic runoff</li> </ul>
<b>Modifications to natural hydrology or water quality from excavations</b>	<ul style="list-style-type: none"> <li>• Localised pollution of waterways</li> <li>• Potential loss of surface flow from existing drainage lines</li> </ul>
<b>Sediment laden runoff during rainfall</b>	<ul style="list-style-type: none"> <li>• Runoff entering drainage lines causing pollution and impacting aquatic life in Cooks River</li> </ul>
<b>Sediment tracking onto public roads from vehicles leaving site</b>	<ul style="list-style-type: none"> <li>• Potential impact on traffic safety</li> <li>• Potential for sediment laden runoff during rainfall</li> <li>• Potential for generation of dust</li> </ul>
<b>Storage of hazardous chemicals and dangerous goods</b>	<ul style="list-style-type: none"> <li>• Contamination as a result of a spill</li> <li>• Impact to watercourses from pollution</li> </ul>
<b>Construction laydown spills</b>	<ul style="list-style-type: none"> <li>• Contamination of soils</li> <li>• Potential for pollutants to wash into drainage system</li> <li>• Sediment laden/ contaminated runoff entering drainage system</li> <li>• Potential for contamination of floodwaters by sewerage, fuels and/or chemicals onsite</li> </ul>
<b>Inappropriate management (handling, stockpiling, transport and disposal) of identified contamination or contaminated materials encountered during construction works (e.g. excavation)</b>	<ul style="list-style-type: none"> <li>• Potential for spread of contamination (soil/water)</li> <li>• Personnel exposure to contaminants</li> <li>• Local media coverage</li> <li>• Fines and prosecution from Regulatory Authorities</li> </ul>

It is noted that groundwater impacts are not captured in Table 9 as groundwater is not anticipated to be impacted by the works. Further information regarding groundwater management is included in the Groundwater Management Procedure included in Appendix E of the CEMP.

Some impacts on soil and water attributable to the Project are anticipated. Section 5 provides a suite of mitigation measures that will be implemented to avoid or minimise those impacts. No stormwater storage structures are anticipated to be impacted by the Project works.

## 5 SOIL AND WATER MANAGEMENT

### 5.1 Erosion and sediment control

#### 5.1.1 General principles

Environmental protection during construction will involve the installation, use and maintenance of a number of temporary erosion and sediment control measures as required in accordance with the following principles:

- ▶ Before undertaking any construction work (including any earthmoving or vegetation removal works), implement all soil and water management works required to minimise pollution of waters;
- ▶ All erosion and sediment controls will be installed in accordance with best-practice guidelines such NSW Blue Book Volumes 1 and 2D (Landcom, 2004 and DECC, 2008);
- ▶ Erosion and sedimentation mitigation measures would be installed and maintained for the duration of the Project's works;
- ▶ Minimise loss of topsoil where practicable;
- ▶ Maintaining ground cover for as long possible to prevent erosion and sedimentation;
- ▶ Diversion of 'clean' run-off from offsite around or through the worksite without it contacting exposed soils or mixing with 'dirty' onsite water and maintaining existing drainage infrastructure wherever possible;
- ▶ Installation of any permanent scour protection measures required for the operational phase would occur as soon as practical;
- ▶ Minimisation of soil erosion and mobilisation of sediment during rain events;
- ▶ Use of suitable sediment retention structures and control measures to filter or retain mobilised sediment generated during rain events over surface disturbances;
- ▶ Maximum sediment capture through effective positioning of temporary erosion and sediment control structures;
- ▶ Progressive rehabilitation and/or stabilisation of completed areas to minimise erosion hazard, as soon as practicable;
- ▶ Regular inspection and maintenance of all erosion and sediment controls to ensure they are effective;
- ▶ Use of water efficient fittings and fixtures where reasonable and feasible for temporary site facilities;
- ▶ Targeted training on ERSED principles for the Principal Contractor's key staff;
- ▶ Ensure that any road, footpath, shared path or cycleway which is open to the public is at all times kept free of mud, dirt, dust, deleterious material, debris, obstructions and trip hazards arising from the Project activities in accordance with the Project Approval;
- ▶ Utilisation and maintenance of appropriate site exit controls. This may include wheel wash facilities. These measures would be put in place to mitigate the risk of any loss of fuels, lubricants, load or other substances;
- ▶ Any spillage or build-up of such material or debris would be cleaned up as soon as practicable;
- ▶ Diversion of run-off from areas of exposed soil to appropriate sediment control devices as much as practicable; and
- ▶ Installation of erosion controls in the base of drains used to divert runoff, to minimise erosion of sediment from the drain.

### 5.1.2 Resources

Ultimate responsibility for erosion and sediment control will rest with the construction personnel within the construction team, led by Construction Managers, who will be responsible for the installation and maintenance of erosion and sediment controls. This would include (although is not limited to):

- ▶ Hard standing and deployment of spray-on soil stabilisers as required;
- ▶ Installation, cleaning and maintenance of controls such as sediment fences, gravel socks, inlet filters, straw bales, sandbags etc;
- ▶ Installation of temporary drain and channel liners (e.g. geofabric, jute matting etc); and
- ▶ All dewatering activities.

Relevant personnel will receive training and ongoing toolbox talks on installation and maintenance of erosion and sediment controls.

### 5.1.3 Sediment basins

Due to the limited earthworks proposed as part of this Project, and limited space within the rail corridor, sediment basins are not anticipated to be required during the Construction stage.

At each of the station locations there is limited space available. Erosion and sediment impacts should be sufficiently mitigated by other measures as outlined in Section 5.1.4.

Should Downer propose to use sediment basins to manage soil and water throughout their works, this SWMP will be updated to include this. However, at this stage of construction Downer does not anticipate use of sediment basins.

### 5.1.4 Erosion and Sediment Control Plans

Erosion and Sediment Control Plans (ESCP) have been developed for the Project sites in accordance with the requirements of Managing Urban Stormwater: Soils and Construction Volume 1 (Landcom 2004) and Managing Urban Stormwater: Soils and Construction Volume 2A (DECC 2008) (the “Blue Book”). The ESCPs generally contain the following key management measures, as applicable to the works:

#### Site entry and access requirements

- ▶ Establish stabilised access points with rumble grids or wheel washes to prevent mud tracking on roads;
- ▶ Clearly delineate access points;
- ▶ Use of street sweepers;
- ▶ Longer term and/or heavily used haul roads would generally be sealed. Sealed haul roads would be regularly cleaned;
- ▶ Unsealed haul roads would be regularly damped down with fixed or mobile sprinkler systems;
- ▶ Appropriate site speed limits would be imposed and signed on haul routes; and
- ▶ Exclusion zones would be designated on construction sites to limit disturbance.

#### Soil stripping and stockpiling

- ▶ Stockpile areas are to be established within approved low-hazard areas clear of watercourses, stormwater drainage lines/culverts and not within the dripline of any retained trees where feasible and reasonable;
- ▶ Diversion drains/bunds are to be installed on the high side of stockpiles if run—off from upslope lands could impact on the stockpile;
- ▶ As much as is feasible, mulched vegetation, topsoil and subsoil (if applicable) are to be stockpiled separately;

- ▶ Any contaminated material stockpiles (i.e. asbestos, contaminated soil) will be covered on-site and short-term material stockpiles (>5 days not in use) with potential to generate dust will be wetted down or covered to prevent fugitive dust emissions or run-off during wet weather. Long-term stockpiles (>30 days) will be stabilised and /or covered in accordance with “Blue Book” requirements;
- ▶ Topsoil and mulch stockpiles will be constructed to no more than 2m in height where possible;
- ▶ Stockpiles will be battered down to a maximum slope of 2:1 (H:V) where space permits; and
- ▶ Material transport from site to surrounding pavement surfaces would be minimised

### Dust control

- ▶ Dust suppression will be carried out whenever necessary to minimise sediments becoming air borne due to wind erosion; and
- ▶ Wherever possible, water detained onsite will be re-used for dust control.

### Stabilisation

- ▶ Undertake progressive stabilisation of ground surfaces as quickly as possible as they are completed rather than at the end of the works program;
- ▶ Progressively revegetate disturbed areas utilising appropriate species in those areas to be revegetated;
- ▶ Temporary ground covers such as hydraulic soil stabilisers or geotextile fabric will be used as much as possible to stabilise batters, stockpiles and large surface areas; and
- ▶ Scour protection and energy dissipation would be used around discharge points at local points to reduce erosion where necessary.

### Sediment controls

- ▶ Locations of nearest existing drainage channels and stormwater inlets to the works will be displayed on the ESCP;
- ▶ Sediment controls will be installed around stormwater inlet pits where appropriate and where they will not cause or exacerbate flooding. Traffic management and safety will need to be considered if installing such devices on or near live traffic;
- ▶ Maximise the diversion of turbid construction runoff into sediment retention devices such as sediment sumps, sediment fences and other sediment traps;
- ▶ Mulch bunds will not be used in concentrated flow areas or if they have the potential to result in tannin leachate into waterways;
- ▶ All erosion and sediment controls will be inspected by the Environment Manager (or delegate) at least weekly, before forecast rainfall exceeding 20 mm in 24 hours, after rainfall exceeding 20 mm in 24 hours and before a site closure of two days or more. Maintenance will be carried out as required prior to the next forecast rainfall event;
- ▶ Site supervisors will undertake daily erosion and sediment control checks and record any issues within site diaries. Site supervisors will ensure controls are maintained and in working order;
- ▶ Concrete washout will be confined to designated concrete washout locations or using a Concrete Waste Separation Unit (CWSU), which allows for recycling of concrete waste;
- ▶ Clean water diversions would be constructed and stabilised around work areas; and
- ▶ No stockpiles of materials or storage of fuels or chemicals would be located adjacent to the existing culverts.

### Water storage

- ▶ Although sediment basins are not required for the site, some water may be stored for treatment before discharge or re-use. In particular, water within excavations that does not meet the criteria for discharge may be pumped into storage tanks or an impermeable bund for treatment, allowing works to recommence in parallel with water treatment.

ESCPs will provide guidance on the installation of control measures, as per the Blue Book.

As the works will mainly occur under rail possessions (i.e. short term works, over a limited area) Downer will develop a series of ESCPs for the works as they progress. This series of ESCPs will focus on the erosion and sediment risks for each work front as they are established and closed out.

Downer has engaged an ERSED Specialist Consultant to review initial site controls and where activities are deemed high risk by the Environmental Manager, ESCPs will be developed. Sydney Metro's Principal Contractor will incorporate any feasible and reasonable recommendations made by the ERSED Specialist.

All ESCPs prepared for the Project will require sign-off by the Environment Manager (or delegate) prior to implementation. As a minimum, the work sites that would require ESCPs to be developed are included as hold points in Section 10.1.

Downer will comply with CoA E38, which states *"All reasonable practicable erosion and sediment controls must be installed and appropriately maintained to minimise water pollution. When implementing such controls, any relevant guidance in the Managing Urban Stormwater series must be considered."* Downer will implement Environmental Inspection Checklist (DG-ZH-FM116.2) to ensure environmental controls are established in line with Zero Harm Risk Management Procedure (DG-ZH-PR028).

REMM SC1 states *"Erosion and sediment control measures would be implemented in accordance with Managing Urban Stormwater: Soils and Construction Volume 1 (Landcom, 2004) and Managing Urban Stormwater: Soils and Construction Volume 2A (DECC, 2008). Measures would be designed as a minimum for the 80th percentile, five day rainfall event."* Sydney Metro's Principal Contractor will comply with this REMM as it applies to the works, all measures will be installed in accordance with this documentation (e.g. sediment fence, rock check dams, batter protection etc.).

It is noted that the "measures" to be designed in accordance with the 80th percentile, five day rainfall event are the different types of sediment basins described under the Managing Urban Stormwater guidelines. As stated in Section 5.1.3, it is unlikely that sediment basins would be implemented during the construction of the Project. As such, the part of REMM SC1 that states *"Measures would be designed as a minimum for the 80th percentile, five day rainfall event"* is not relevant to the Project works. Should Downer propose to use sediment basins to manage soil and water throughout their works, this SWMP will be updated to include this.

In accordance with REMM FHW8, erosion and sediment mitigation measures would be installed and maintained for the duration of the Construction period.

## 5.2 Surface water management

The Project site forms part of the greater Cooks River catchment. Specific Water Quality Objectives have been derived for the catchment in line with the NSW Water Quality Objectives. Catchment mapping classifies the Project site as a waterway that is *"affected by urban development"*. The water quality objectives for the catchment include the protection of:

- ▶ Aquatic ecosystems - Maintaining or improving the ecological condition of waterbodies and their riparian zones over the long term;
- ▶ Visual amenity – Aesthetic qualities of waters; and
- ▶ Secondary contact recreation - Maintaining or improving water quality for activities such as boating and wading, where there is a low probability of water being swallowed.

### 5.2.1 Reuse

Where practicable, any water collected in excavations / work sites will be reused within the Premises (e.g. dust suppression, watering retained vegetation). The Sydney Metro - Water Discharge or Reuse Procedure regulates both onsite reuse and offsite point source discharge. Prior to any discharge off the premises, or reuse within the premises, Downer's Environment Manager (or delegate) is to sign off that the water is suitable for reuse or discharge. Refer to Section 10.1 for hold points.

**5.2.1.1 Onsite reuse**

For onsite reuse, the following criteria will be utilised:

- ▶ pH – 6.5 to 8.5;
- ▶ No visible oil and grease;
- ▶ No potential for water to leave the premise;
- ▶ No surface runoff will be generated from the reuse (reuse includes dust suppression, watering retained vegetation etc.); and
- ▶ No potential for water to reach any watercourse.

**5.2.2 Offsite discharge**

No water will be discharged off site until it has been tested and a permit to discharge is approved by the Environment Manager (or delegate). Refer to Section 10.1 for hold points. All water discharges will be documented using Sydney Metro’s Water Discharge or Reuse Approval Form or site-specific equivalent.

Water quality testing will be undertaken prior to discharge offsite in accordance with the Sydney Metro – Water Discharge or Reuse Procedure for the following parameters. Refer to Table 10 for testing criteria for offsite discharge as published in the Sydney Metro – Water Discharge or Reuse Procedure.

*Table 10: Water quality criteria for discharging off premises*

Parameter	Criterion	Method	Time prior to discharge
Oil and grease	None visible	Visual inspection	< 1 hour
pH	6.5 – 8.5	Probe/Meter	< 1 hour
Total Suspended Solids (TSS)	<50 mg/L	Meter/grab sample	< 1 hour/ <24 hours

In accordance with REMM FHW10, discharges from construction water treatment devices would be monitored to ensure compliance with the discharge criteria, as stated above.

The Water Quality Monitoring Program, as included within Section **Error! Reference source not found.**, will be implemented to monitor impacts on surface resources during construction.

Should offsite discharge be required, Downer will be responsible for identifying and proposing suitable discharge points. Downer’s Water Release Permit (DG-ZH-FM064.1) will be completed for any water release activities.

This Sub-plan will be revised to include any discharge points to be utilised by Downer. Downer will consult with the relevant Council prior to discharge in Council stormwater assets where the capacity of the stormwater system may be reduced during wet weather. It is noted that volume of stormwater captured and discharged offsite is expected to be negligible and that under most circumstances the capacity of the system would be sufficient.

Should Downer obtain an EPL which contains additional discharge criteria, this SWMP will be revised to include this. However, at this stage of construction Downer does not anticipate obtaining an EPL and will notify Sydney Metro should this be required.

**5.3 Potable water**

In-line with the CEMF the following water resource management objectives will apply to the construction of the Project:

- ▶ Minimise use of potable water; and
- ▶ Maximise opportunities for the reuse of rainwater, stormwater, wastewater and groundwater.



Downer will undertake a Water Balance Study to meet these objectives. The Water Balance Study will be completed prior to the commencement of construction and will estimate the quantities, types and potential sources of water that will be required for the Project. The study will identify the best opportunities to use non-potable water (where available) instead of potable water and minimise the quantities of both potable and non-potable water which will be consumed.

The water balance study will consider the following:

- ▶ Site facilities;
- ▶ Dust control for construction activities;
- ▶ Subgrade treatments;
- ▶ Trenching activities;
- ▶ Piling activities;
- ▶ Landscape establishment; and
- ▶ Water demand ongoing for operation and maintenance.

Measures to minimise water consumption are identified in the Sustainability Management Plan. Examples of initiatives that will be investigated and implemented where practicable include:

- ▶ Installing water efficient controls, fixtures and fittings in temporary facilities;
- ▶ Harvesting and reusing rainwater from roofs of temporary facilities and operation facilities;
- ▶ Using non-potable water sources for dust suppression during construction;
- ▶ Using water efficient construction methods and equipment;
- ▶ Specifying within supply chain contracts that offsite batching plant concrete production operation water is recycled, suitably treated and incorporated into concrete production that is supplied the Project;
- ▶ Maximise the use of stormwater in the urban design; and
- ▶ Include a drought tolerant planting schedule in the urban design.

### 5.4 Flooding management

As outlined in Section 3.6, the construction of the Project should have a negligible impact on flooding within the catchment, with minimal loss of flood storage and minimal changes or restrictions to existing flood regimes. However, in accordance with CoA E9, where the works will worsen flooding impacts, Downer will be responsible for implementing measures to address those impacts. Prior to a potential flood event, emergency plans must be communicated to workers and prepared and practised in accordance with Emergency Management Procedure (DG-ZH-PR015).

The minimum requirements for work activities involving excavation, shafts, pits, trenches and tunnelling to be conducted in a safe, legal and competent manner will be done through the application of Downer's Excavation, Trenching and Services Standard (DG-ZH-ST043).

In accordance with CoA E8, the location of Downer's construction compounds will not worsen the existing flooding characteristics of the area. Detailed construction planning would consider flood risks for all compounds and work sites. This would include identification of measures to not worsen existing flooding characteristics. In accordance with REMM FHW5, not worsen is defined as:

- ▶ A maximum increase in flood levels of 50mm in a one per cent AEP event;
- ▶ A maximum increase in time of inundation of one hour in a one per cent AEP event;
- ▶ No increase in the potential for soil erosion and scouring from any increase in flow velocity in a one per cent AEP flood event.

When determining potential locations for proposed compounds and worksites, Downer will review and consider existing flood information from multiples sources, including *the Sydney Metro City & Southwest Sydenham to Bankstown EIS Technical Paper 8 – Hydrology, Flooding and Water Quality Assessment*, Council Flood Studies and Local Environmental Plan Flood Maps. Downer will undertake further assessment where compounds or worksite are proposed for areas of flooding, to ensure conditions are not worsened in accordance with REMM FHW5.

In addition, Downer will implement the following measures to mitigate impacts of flooding on the Project in accordance with REMM FHW6:

- ▶ The site layout and staging of construction activities would;
  - Avoid or minimise obstruction to overland flow paths and limit the extent of flow diversion required;
  - Consider how works would affect the existing stormwater network such that alternatives are in place prior to any disconnection or diversion of stormwater infrastructure;
- ▶ Stockpiling and storage of materials to occur outside potential flood areas;
- ▶ Temporary facilities and hazardous material storage to be above flood levels;
- ▶ Maintain overland flow paths;
- ▶ Monitoring of rainfall will be undertaken in accordance with Water Quality Monitoring Program;
- ▶ Construction equipment (or excess material) would be removed from prone areas where significant events are predicted;
- ▶ Site sheds and chemical stores will be constructed above the 10-year ARI level;
- ▶ Site inspections will be completed to ensure ERSED controls are place prior to the event;
- ▶ Where applicable, temporary levees or bunds would be strategically placed to contain potential flooding impacts resulting from any temporary works on the floodplain and minimise the risk to surrounding properties which might otherwise be affected;
- ▶ Stockpiles will be located away from areas subject to concentrated overland flow; and
- ▶ In the event of an emergency the requirements set out in the Emergency Response Plan will be implemented.

### 5.5 Groundwater management

The Project's construction activities are anticipated to have negligible impacts to the groundwater table and local groundwater hydrology. Any potential impacts on groundwater will be considered and managed through each site's ESCP along with mitigation measures listed in Appendix E of the CEMP.

Some groundwater seepage into excavations may occur and will be managed as detailed in the Groundwater Procedure included in Appendix E of the CEMP. Groundwater seepage will be either treated to meet ANZG/ANZECC Guidelines criteria for the nearest water body and discharged; or will be removed from site as liquid waste in accordance with NSW EPA's Waste Classification Guidelines. Should groundwater be encountered and discharge to the nearest waterbody proposed, this Plan will be updated to include the specific criteria and discharge parameters, consistent with the ANZG/ANZECC Guidelines.

### 5.6 Refuelling, chemicals and spill management

Downer will not store any hazardous chemicals or dangerous goods at sites. Should storage of hazardous chemicals or dangerous goods be required at a later date then this will be done. Chemicals and dangerous goods will be stored and used onsite in accordance with Downer's Hazardous Chemicals and Dangerous Goods Storage Principles & Transportation (DA-ZH-ST054) which defines the general, planning and safe use and handling requirements along with the following protocols:

- ▶ In accordance with CoA E41, dangerous goods, as defined by the *Australian Dangerous Goods Code*, will be stored and handled strictly in accordance with:
  - All relevant Australian Standards;
  - For liquids, a minimum bund volume requirement of 110% of the volume of the largest single stored volume within the bund; and
  - The Environment Protection Manual for Authorised Officers: Bunding and Spill Management technical bulletin (EPA, 1997).
- ▶ In accordance with REMM HRS4 all hazardous chemicals and dangerous goods that may be required for construction and operation would be stored and managed in accordance with the Storage and Handling of Dangerous Goods Code of Practice (WorkCover NSW, 2005) and the Hazardous and Offensive Development Application Guidelines: Applying SEPP 33 (Department of Planning, 2011);
- ▶ To identify and manage dangerous goods, Downer's Hazardous Chemicals and Dangerous Goods Risk Assessment (DG-ZH-FM024.1) will be applied.
- ▶ Hazardous chemicals and dangerous goods will be stored onsite in lockable containers, in their original receptacles;
- ▶ Emergency spill kits would be kept on-site at all times. All staff would be made aware of the location of the spill kit and be trained in its use;
- ▶ All hazardous chemicals and dangerous goods will be clearly labelled and will have Safety Data Sheets (SDS) affixed or available nearby. The SDS will be used to determine compatibility of hazardous chemicals to be stored together, i.e. no flammables with corrosives, not all corrosives compatible with each other etc;
- ▶ A bund sized to 110% of the largest stored receptacle will be established around any storage area for hazardous chemicals and dangerous goods;
- ▶ Storage and handling of flammable or combustible liquids will be in accordance with EES Group guidelines for Bunding and Spill Management, as well as AS 1940-1993 – The Storage and Handling of Flammable and Combustible Liquids;
- ▶ An up-to-date register of hazardous chemicals and dangerous goods will be kept onsite at all times;
- ▶ Hazardous chemicals and dangerous goods will only be used onsite as required, in accordance with the manufacturer/supplier instructions;
- ▶ Any substances with the potential to impact water quality will be assessed by the Environment Manager to determine what environmental safeguards or procedures are required for that substance to minimise the risk of environmental harm;
- ▶ The use of any hazardous chemicals and dangerous goods that could result in a spill will be undertaken away from drainage or stormwater lines and, wherever possible, within defined bunds;
- ▶ All spills or leakages will be immediately contained and absorbed. Routine inspections of all construction vehicles and equipment would be undertaken for evidence of fuel/oil leaks;
- ▶ Vehicles and machinery would be properly maintained to minimise the risk of fuel/oil leaks;
- ▶ In the event of a spill, the Spill Management Procedure to be prepared by Downer will be implemented. As set out in Section 3.10 of the CEMP, the management of environmental incidents where material harm to the environment is caused or threatened will be managed in accordance with Sydney Metro's Environmental Incident and Non-compliance Reporting Procedure; Downer's Spill Prevention and Control Compliance Guide (DG-ZH-CG074) referenced within Downer's Contamination Management Procedure (DG-ZH-PR068) will be complied with; and
- ▶ Construction plant, vehicles and equipment would be refuelled off-site, or in designated re-fuelling areas located at a minimum distance of 50 metres from drainage lines or waterways, where possible.

### 5.7 Contamination

Downer's Contamination Management Procedure (DG-ZH-PR068) and the following mitigation measures will be implemented by Downer to mitigate risks associated with contamination across the Project sites:

- ▶ Known contamination areas will be clearly demarcated on site and within Environmental Control Maps (ECMs) – these will be updated during course of the Project if areas of potential contamination are identified;
- ▶ In accordance with REMM SC4, WorkCover dangerous goods searches will be carried out by Sydney Metro's Principal Contractor for properties that have potential contamination near Belmore Station, to provide additional site characterisation and identify the risk of contamination in these areas;
- ▶ Known and potential contamination would be assessed, managed and/or remediated in accordance with the Unexpected Contaminated Land Procedure and Asbestos Finds Procedure (refer to Appendix B) and the Waste and Spoil Management Procedure in Appendix E of the CEMP for appropriate waste classification and removal of material off-site and in accordance with its classification status to an EPA licenced facility or facility that can lawfully accept the waste;
- ▶ Appropriate environmental controls/measures will be included on ECMs and ESCPs and implemented to manage and prevent the spread of contamination. Typical examples of controls/measures would include (although is not limited to):
  - Segregating contaminated material to minimise cross contamination (where safe to do so);
  - Establishing suitable lining prior to stockpiling;
  - Signposting;
  - Covering material; and,
  - Implementing measures outlined within Section 5.11 of this plan for ASS/PASS.
- ▶ Identifying reporting requirements, including requirements under the *Contaminated Land Management Act 1997*, when contamination is encountered; and
- ▶ Providing inductions and toolbox talks detailing the correct response when contaminated material is encountered.

Where contamination is encountered, workers will apply the appropriate Personal Protective Equipment (PPE). The appropriate PPE will depend on the contaminant type and the works to be undertaken. Appropriate PPE will be decided upon in consultation with an Occupational Hygienist.

### 5.8 Unexpected finds

In the event of unexpected finds of contamination or asbestos Downer's DG-ZH-PR068 Contamination Management Procedure (refer Section 4.4) and Sydney Metro's Unexpected Contaminated Land Procedure and Asbestos Finds Procedure (refer Appendix B) will be implemented. In accordance with CoA E40, the Unexpected Contaminated Land Procedure and Asbestos Finds Procedure will be implemented throughout Construction.

In brief, the following would occur:

- ▶ Cease work in the area of concern immediately;
- ▶ Isolate the area with barrier tape or any other physical barrier to prevent workers from entering the potentially contaminated location;
- ▶ Report the area of concern to the Environmental Manager and WHS Manager immediately. Nearby work groups would be notified;
- ▶ Environmental Manager will engage a suitably qualified contamination consultant inspect the site and carry out an initial assessment of the nature and extent of the contamination;
- ▶ The Contamination Consultant will advise what management is required in accordance with this plan, any Planning Approval requirements and the contamination report prepared; and
- ▶ Hazardous materials surveys would be undertaken during detailed design for utility adjustments as required.

### 5.9 Asbestos

Where ACMs are identified, or are potentially present, an Asbestos Management Plan will be developed based on Downer's Asbestos/ ACM Management Plan Template (ZH-TP086.1) and be included in the Project's Health and Safety Management Plan. The management of asbestos/ asbestos containing materials (ACM) will be done in accordance with the with Downer's Asbestos Management Standard (DG-ZH-ST086).

Identified fragments of Asbestos Containing Material (ACM) on the surface and within stockpiles on site would be managed in accordance with the measures above, the Project's Health and Safety Management Plan, Asbestos Management Plan (included in Project Health and Safety Management Plan) and task specific Asbestos Removal Control Plan will be implemented in accordance with Downer's DG-ZH-ST086 Asbestos Management Standard (refer Section 5). The unexpected contamination finds procedure would also be implemented as per Section 5.8.

Removal of ACM would be by a licenced asbestos removal contractor who would produce the following:

- ▶ Asbestos removal licences for workers performing the removal works;
- ▶ A task specific Safe Work Method Statement (SWMS);
- ▶ Evidence of notification to the relevant authority and asbestos removal permit;
- ▶ Where there is uncertainty as to whether the exposure standard may be exceeded, or if it is likely to be exceeded, then air monitoring must be performed by a competent person who is independent of the removalist;
- ▶ At the completion of the removal works a clearance certificate must be obtained from a competent person;
- ▶ A waste disposal certificate must be provided by the removalist following the completion of the works to prove that any asbestos containing material removed from the site has gone to a licenced landfill facility; and
- ▶ Unless a specific exemption exists, asbestos waste must be tracked using the NSW EPA's WasteLocate. Evidence of this is to be provided by the asbestos removalist.

Safety considerations relating to contamination and asbestos are to be included within the Principal Contractor's Health & Safety Management Plan & Occupational Health Hygiene Welfare Management Plan. Task specific Asbestos Removal Control Plans will be developed for the works if asbestos is encountered.

Where asbestos is encountered, workers will apply the appropriate PPE. Appropriate PPE will be decided upon in consultation with an Occupational Hygienist.

### 5.10 Salinity

In accordance with the findings of the EIS, the potential for salinity issues on the Project sites are low (refer to Section 3.2.2 and Figure 2). Should salinity be identified during the Project works further investigation is to occur, and measures would be put in place to protect building materials, vegetation and landscaping. If saline soils are encountered, they would be managed in accordance with *Site Investigations for Urban Salinity* (DLWC, 2002) as per REMM SC3.

### 5.11 Acid sulfate soils

As stated in the EIS and site contamination reports, ASS and PASS have been identified along the Sydenham to Bankstown rail corridor (refer to Section 3.2.3 and Figure 2). In accordance with REMM SC2, prior to ground disturbance in high probability ASS areas, testing would be carried out to determine the presence of ASS. Ongoing testing will occur as per the field and laboratory testing requirements outlined below.

If ASS are encountered, they would be managed in accordance with the *Acid Sulfate Soil Manual and Waste Classification Guidelines – Part 4: Acid Sulfate Soils* and Downer's Acid Sulfate Soils Management Standard DG-ZH-ST068.2 (refer to Sections 4 and 5).

General mitigation measures for working with ASS and/or PASS include:

- ▶ Completing a preliminary assessment as per Downer's Acid Sulfate Soils Management Standard

The preliminary assessment findings will inform the designers on the materials and methods of construction to be used especially where PASS/ ASS has been identified.

The desktop/preliminary assessment (which includes mapping) that was undertaken indicates Class 5 (refer Figure 2). Acid sulfate soils are not typically found in Class 5 areas and therefore no ASS Management Plan (ASSMP) is required and works will be under an unexpected finds (noting that Campsie may have some ASS that is not mapped due to flooding risks).

If PASS/ASS is triggered, the ASSMP should be produced in accordance with relevant legislation and jurisdiction guidelines outlined in Downer's Acid Sulfate Soils Management Standard.

- ▶ Spoil to be managed in accordance with the Waste and Spoil management procedure within Appendix E of the CEMP;
- ▶ Areas of ASS and PASS should be included on ECMs and any mapping included in the permit to disturb;
- ▶ Plan works to minimise disturbance to areas of ASS and PASS;
- ▶ Excavation of ASS or PASS will not occur until an appropriate storage/treatment area is established. This includes the establishment of erosion and sediment controls in the vicinity of the storage/treatment area;
- ▶ Field testing for suspected ASS or PASS at a rate of 1 sample per 200m<sup>3</sup> of excavated material from low, medium or high-risk areas or where previous testing has indicated the presence of PASS or ASS;
- ▶ Field testing will be undertaken with the use of Hydrogen Peroxide based on Appendix I of the Acid Sulfate Soils Assessment Guidelines (Ahern et al, 1998a). Soils that record a pH of below 4, following oxidation with H<sub>2</sub>O<sub>2</sub>, will be managed as ASS;
- ▶ 10% of samples will be sent for laboratory analysis using the chromium reducible suite (Scr) method to confirm the peroxide screening test results and to confirm the required liming rate;
- ▶ PASS will be kept wet to prevent oxidation;
- ▶ ASS or PASS stockpiles will be located at least 50m away from drainage lines, unless a risk assessment is undertaken to prove that risks associated with the stockpile storage area are minimal;
- ▶ ASS or PASS that will be treated is to be stockpiled separately in a bunded stockpile area. Treatment will occur in accordance with the soil ASS Treatment Plan as described within Appendix C;
- ▶ Treatment rates will be determined by laboratory analysis. Estimated treatment rates are included in Section 5.11;
- ▶ Testing will occur to validate any treatment of ASS or PASS;
- ▶ Any surface water captured within the ASS/PASS storage bund or treatment pad area, or excavation where ASS/PASS is present will be tested in accordance with the Sydney Metro Water Discharge and Re-use Procedure to mitigate impacts on water quality and aquatic environments; and
- ▶ Inductions and toolbox talks related to the management of ASS and PASS.

A register of ASS testing will be maintained by the Principal Contractor. A register of ASS/PASS stockpiles, including liming of these stockpiles, will also be maintained.

Complete records of all testing, treatment and monitoring will be kept by Sydney Metro's Principal Contractor including:

- ▶ The lime register;
- ▶ Results of pH and verification testing;
- ▶ Waste classification reports; and
- ▶ Verification testing reports (if required).

### 5.11.1 Treatment and liming

Sampling undertaken within the *City & Southwest, Sydney Metro Sub-portion 2 - Sydenham to Bankstown Targeted Contamination Assessment* indicated that the liming rate for ASS or PASS soils on site would be between 1 and 8.8 kg CaCO<sub>3</sub>/tonne. Liming rates would be confirmed by a Waste Classification Report for any material encountered.

When treating ASS / PASS onsite the following shall apply:

- ▶ Any ASS/PASS material shall be treated when there is sufficient quantity – generally in 100m<sup>3</sup> batches;
- ▶ A bunded impervious pad (treatment pad) shall be created for the treatment of extracted ASS. The area shall be selected to ensure no impact to other environmental aspects or elements;
- ▶ A compacted bund wall of no less than 500mm shall be constructed around the entire perimeter of the ASS treatment pad. The bund should be surface limed to neutralise any runoff from stockpiled materials. The location of the bund and treatment pad will be identified on the ECM and is to be a minimum of 50m away from any waterway;
- ▶ The base of the treatment pad shall have a minimum of 300mm of clay or plastic lining and be dressed with a layer of lime or crushed limestone of at least 200mm thickness. This is to be established prior to stockpiling and/or placement of ASS materials at this location. A sump shall be constructed at the lowest point on the inside of the bund to contain runoff from the treatment. The sump shall be limed if required to neutralise runoff from stockpiled materials. If the water is to be discharged from this it must comply with the requirements outlined in Section 5.2 of this Plan;
- ▶ The treatment pad shall be graded so that all surface water flows to the sump;
- ▶ The bund will be covered at the end of each day or in the event of any rainfall.

### 5.11.2 Waste classification and offsite disposal

Prior to removal from the treatment area, treated materials shall be validated at 1 random test per 200m<sup>3</sup> or each batch of soil treated (whichever is less) to ensure effectiveness of treatment.

A batch of soil is defined as soil from one location that has a different liming rate to the rest of the soil on the treatment pad. Should the treated ASS remain above the guideline requirements, further treatment shall be conducted for the balance of lime required.

Once ASS is treated, tested and validated as per the guidelines, the material will no longer be considered ASS. As such, the material can be placed as non-structural fill (where appropriate).

Excavated surfaces will be treated with lime and tested to ensure ASS does not pose a risk to the installation of services.

It is currently the intention that treated materials be reused on site, as far as is practicable, as fill material above the groundwater table. However, should this not be possible, or volumes of excavated material be in excess of that which can be reused, the treated soil will be disposed of to an appropriately licensed landfill following a waste classification by an appropriately qualified environmental consultant.

The waste classification and disposal will be undertaken in accordance with relevant standards and requirements, including the NSW EPA (2014) Waste Classification. It is noted that the treated soil cannot be classified as virgin excavated natural material (VENM) as per the NSW DECC (2014) requirements.

#### **Disposed Without Treatment (As per Section 5 of DG-ZH-ST068.2)**

Downer's Environment Manager (or delegate) are responsible for verifying the following:

- ▶ In some instances, disposal without treatment may be an option. The spoil must be tested immediately prior to disposal to confirm oxidation has not occurred.

- ▶ The landfill facility must be licensed to dispose of PASS and notified prior to disposal below the water table. Where PASS cannot be classified as VENM as per *DG-ZH-ST068.1 Fill Material Management Standard* or a suitable underwater disposal site at a landfill is not available, the soil must be treated as per section *Neutralisation* below.
- ▶ Delivery to the landfill must be within 8 hours of excavation.
- ▶ PASS must be kept covered and wet during transport to the landfill.
- ▶ Documentation must be provided to the landfill for each load delivered, indicating that the soil excavation, transport and handling have been conducted in accordance with the relevant guidelines.
- ▶ Soil that has dried out, undergone any oxidation of its sulfidic minerals, or which has a pH of less than 5.5 must be treated prior to disposal as per section *Neutralisation* below.
- ▶ Jurisdictional rules regarding landfill proximity may apply.

### **Neutralisation (then Backfilled/ Disposed)**

Downer's Environment Manager (or delegate) are responsible for verifying the following:

- ▶ To treat ASS a brief assessment must be undertaken at a NATA approved laboratory to provide guidance on neutralisation and management (e.g. SPOCAS test).
- ▶ ASS must be treated and managed in a designated bunded area in accordance with an approved ASSMP.
- ▶ All disturbed ASS material must be immediately transported to the designated treatment area. Where this is not possible, stockpiles must be either encapsulated in a plastic sheet or secured in a lined bund to prevent contact with air and water.
- ▶ A layer of Aglime or granular lime 100mm thick must be placed on the underlying soil at the base of the treatment area to provide further safeguard against any leachate generated during the treatment.
- ▶ Once treated and validated, the spoil can be used for backfilling excavations.

Alternatively, treated and validated spoil can be disposed at an appropriately licensed landfill in accordance with standard *DG-ZH-ST068.1 Fill Material Management Standard*.



## 6 WATER QUALITY MONITORING PROGRAM

### 6.1 Overview

Downer will monitor the effectiveness of measures for managing soil and water impacts during the construction of the Project. This will be achieved through implementation of a Water Quality Monitoring Program as detailed in this section, and regular inspections of control measures and their effectiveness.

The methodology below forms the Water Quality Monitoring Program to be implemented, to comply with CoA C8 and REMM FHW4. This monitoring program has been prepared to satisfy CoA C8(b) and REMM FHW4, in consultation with CoCB, NRAR and NSW EPA. See Section 1.4 for summary of consultation undertaken.

No groundwater monitoring is proposed as part of this Project as Appendix C of the Staging Report states that Section 7.2 of the CEMF is not applicable to the Project due to limited impacts.

The monitoring program will be in place and implemented prior to any on or off-site discharge and for the duration of the Project works.

In accordance with CoA C14, results of this monitoring program will be submitted to the Planning Secretary, relevant regulatory agencies including the NSW EPA and CoCB in the form of a Construction Monitoring Report. The Construction Monitoring Report will be submitted on a six-monthly basis from the commencement of construction.

This monitoring program addresses the Project's Construction phase monitoring of the Project. The cessation of Construction phase water quality monitoring at each location will be determined by Downer in consultation with the ER and Sydney Metro. Cessation of monitoring may be driven by the completion of works which generate a risk to surface water quality, necessitating monitoring (for example when no further open excavations remain and/or with the completion the Wiley Park services building), or at any other time agreed with the ER. It is noted that monitoring being undertaken by follow-on contractors or works packages will be detailed in their respective management plans, and is outside the scope of this Plan.

### 6.2 Monitoring purpose, objectives and scope

As outlined in Section 3.5 no watercourses will be directly impacted or modified by the Project's works. The closest Project worksite to an existing watercourse is Wiley Park Station services building, which is located approximately 100m from an unnamed concrete lined channel which forms the upper reaches of Coxs Creek and is identified as a first-order stream. Treated construction water may be discharged into existing stormwater systems during the delivery of the Project.

Downer's focus in relation to water quality management during construction is on prevention of pollution – minimising the risk of polluted, sediment-laden or contaminated water leaving the premises, by implementing a comprehensive management and monitoring regime on site.

Surface water quality monitoring of the receiving environment to define suitable standards or benchmarks for water quality discharges from the Project's works is not proposed given:

- ▶ Waterways in proximity to the Project sites are highly modified due to the urbanised nature of the surrounding area;
- ▶ Waterways detailed in Section 3.5 are typically greater than 100m away from the worksites and connected via stormwater systems;
- ▶ The stormwater system collects and transfers water from large urbanised catchment areas, as such there is the potential for contaminants to enter the stormwater systems and waterways from many different sources.
- ▶ Water quality in urban areas in proximity to the Project is highly variable and changes according to prevailing weather patterns and day-to-day during rainfall.

As outlined in Section 6.3, pre-construction monitoring data, if available will be obtained from the previous Principal Contractor where monitoring may be required.

### 6.3 Available baseline data

Water quality is measured on an ongoing basis for the wider Cooks River catchment by the NSW OEH as part of the Beachwatch programme. The monitoring point is at Kyeemagh Baths at the mouth of the Cooks River in Port Botany. This monitoring point is considered to be too far away from the Project sites to provide data that is useful for background information.

Limited background water quality data is available for the Cooks River through monitoring undertaken by the Cooks River Alliance. However, the most recent data available is from 2013/2014 and monitoring was not undertaken in close proximity to the Project site.

The Southwest Metro Early Works (SMEW) project conducted water quality monitoring at the Cooks River, adjacent to the rail corridor for the purpose of establishing baseline water quality data from May 2019 to September 2020 at quarterly intervals and also during a number of rainfall events. It is noted that the data captured as part of the monitoring indicates that the water quality within the Cooks River at the monitoring location exceeds several of the ANZECC criteria regularly, including; pH and turbidity. Due to the fluctuating results, they offer little in terms of interpretation or predictable trends. Baseline water quality data from the Cooks River will be sourced from the SMEW contractor.

For the purpose of establishing baseline water quality data within the first order stream at Wiley Park, water quality monitoring will be undertaken for a period prior to construction of the Wiley Park services building as outlined in the Pre-construction column of Table 13 (i.e. once per month and once after 20mm rainfall in a 24 hour period, if possible). At a minimum, one dry weather sample and one wet weather sample (weather permitting) will be undertaken during the pre-construction period. The frequency of pre-construction water quality monitoring within this channel is subject to water being present within the structure. A minimum of two baseline samples is targeted. Downer will undertake monitoring during both dry and wet conditions, with at least one dry weather round of monitoring and one wet weather round of monitoring taken as part of the baseline monitoring program. Pre-construction baseline data will be collected and stored by Downer in accordance with section 3.16 of the CEMP.

### 6.4 Construction water quality monitoring

Chapter 21.4.1 of the EIS states that “where discharge to surface watercourses are required, a monitoring program would be implemented as part of the construction environmental management plan to assess water quality prior to discharge”. Further, as outlined in Section 3.5 no watercourses will be directly impacted or modified by the Project’s works. Treated construction water may be discharged into existing stormwater systems during the delivery of the Project.

As such, water quality will be monitored to ensure any discharge from the Project’s construction sites is in accordance with the Sydney Metro – Water Discharge or Reuse Procedure and to identify potential non-compliances before they occur.

Water quality monitoring will be undertaken for controlled discharges offsite to ensure compliance with the discharge criteria defined in Section 5.2.2. Monitoring and analysis of data will be carried out by a competent person. Evidence of competence will be retained.

In accordance with CoA C14, results of this monitoring program will be submitted to the Planning Secretary, relevant regulatory agencies such as the NSW EPA and CoCB in the form of a Construction Monitoring Report. The Construction Monitoring Report will be submitted on a six-monthly basis from the commencement of Construction.

It is the responsibility of Downer’s Environmental Manager to ensure all monitoring is performed according to these requirements.

### 6.5 Monitoring parameters

Downer will monitor site water prior to any discharge from site as outlined in Section 5.2.2. This will ensure that any water that is discharged is compliant with the requirements and would not impact the water quality within the receiving catchment. The monitoring parameters outlined in the Sydney Metro – Water Discharge or Reuse

Procedure (refer to Appendix F) have been adopted. Table 10 details the parameters to be tested when monitoring site water for discharge.

In addition, Downer will undertake environmental condition surveys on major drainage crossings and outlets within localised catchments where works are to occur. The surveys will include a photo of the drainage outlets during dry, and where possible, wet weather. Downer will record any particular noteworthy conditions related to water quality (e.g. turbid water observed and the source of the turbid water where visible, litter, discolouration, visible oils or sheens).

Environmental condition survey information will be collected and stored on Downer’s document management system.

The range of parameters to be tested for water quality monitoring of the first order stream within the concrete lined channel at Wiley Park are detailed in Table 11. These parameters are in accordance with Table 21.4 of the EIS, Vol. 1B

Note: the proposed trigger values and actions outlined in Table 11 may be further refined during the Project depending on analysis of the monitoring data set:

Table 11: Water quality monitoring parameters at Wiley Park

Parameter	Sampling method	Analytical method	Criteria (lowland rivers)	Proposed trigger values	Proposed actions
Dissolved Oxygen (DO)	Probe	Field analysis	Lower limit – 85% Upper limit -110%	Downstream results are > than upstream results in rainfall events up to and including the significant event threshold of >20 mm in 24 hours.  Downstream results are > than upstream results during dry weather sampling.	Environment Manager (or delegate) to re-test to confirm results and undertake an inspection of the adjacent works and propose actions where required.
Turbidity (NTU)	Probe	Field analysis	6-50 NTU		
pH	Probe, grab sample if required	Field analysis, lab analysis if required	Lower limit – 6.5 Upper limit – 8.5		
Salinity (EC)	Probe	Field analysis	125 – 2200 µs/cm		
Total phosphorus	Grab sample	Lab analysis	50 ug/L		
Total nitrogen	Grab sample	Lab analysis	500 ug/L		
Chlorophyll-a	Grab sample	Lab analysis	5 µg/L		

## 6.6 Monitoring frequency and locations

As described in Section 6.4, water quality monitoring will be conducted for controlled discharges offsite to ensure that discharges from the Project sites are in accordance with the water quality criteria. The frequency of offsite discharges and associated monitoring will be dependent upon rainfall events and degree of surface water inflows into excavations.

The planned monitoring locations and monitoring schedule are set out in Table 12. Downer will be responsible for nominating suitable discharge locations in consultation with Sydney Metro and the ER.

Table 12: Water quality monitoring schedule

Work site	Source of offsite discharges	Monitoring schedule
Hurlstone Park Station	Open excavations	Prior to each dewatering
Belmore Station	Open excavations	Prior to each dewatering
Wiley Park Station	Open excavations	Prior to each dewatering

In addition to Table 12, surface water quality monitoring locations and frequency to be undertaken at Wiley Park Station are identified in Table 14. Water quality monitoring will be undertaken within the unnamed concrete lined channel at Wiley Park, both upstream and downstream of the Project site. These locations have been selected as they are adjacent to the Wiley Park services building site and will allow Downer to assess the impact of the building's construction. It is noted that there may be other drainage outlets along the length of the canal that may convey water into the channel between the upstream and downstream monitoring locations.

Surface water quality monitoring of the receiving environment prior to construction of the services building is highly unlikely to define suitable standards or benchmarks for water quality discharges from the Project works. The catchment collects and transfers water from a large urbanised area. As such, there is a potential for contaminants to enter the stormwater systems and the downstream waterway from many different sources.

Water quality monitoring will occur during dry and wet conditions and will be compared against baseline water quality monitoring undertaken during the pre-construction phase. Weather monitoring will be conducted using data from Bankstown weather station, accessed via the bureau of Meteorology website (<http://www.bom.gov.au>).

Water quality monitoring will continue at Wiley Park until works within the proximity of the channel have ceased, and Downer can demonstrate to the ER that the Project no longer likely to have impact to water quality within this channel.

Where exceedances to the Water Monitoring Parameters within Table 11 occur, and where those exceedances are not reflected in pre-construction baseline data, retesting will occur within 24 hours to confirm results. A site inspection will also occur 24 hours to determine if any construction works may be contributing to water quality parameter exceedances.

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

Table 13: Wiley Park water quality monitoring program

Waterway	Indicative monitoring points	Interaction with Project works	Monitoring location, scope and frequency	
			Pre-construction works	During construction of the Wiley Park services building
Sydney Water Cooks River Channel (first order stream)	WP 1 – Upstream	Channel within proximity to Wiley Park service building site	Monthly for parameters detailed in Table 11 (including at least one dry weather round of sampling).	Quarterly for parameters detailed in Table 11 (including during dry weather).
	WP 2 – Downstream		One wet weather event, if possible, for the parameters detailed in Table 11, subject to event occurrence, safe conditions for monitoring and access being available to conduct monitoring.  Note: A wet weather event is when the receiving area has received >20mm of rain in 24 hours. The sampling will be undertaken immediately during construction hours and if it is safe to do so.	Four wet weather events per year for the parameters in Table 11, subject to event occurrence, safe conditions for monitoring and access being available to conduct monitoring.  Note: A wet weather event is when the receiving area has received >20mm of rain in 24 hours. The sampling will be undertaken immediately during construction hours and if it is safe to do so.

## 6.7 Meteorological monitoring

Meteorological data will be checked to assist with managing impacts and identify potential non-compliances.

Weather data including daily weather conditions and forecasts may be obtained from the most representative weather station, as published on the Bureau of Meteorology website (<http://www.bom.gov.au/places/nsw>). In the absence of electronic meteorological information, the Site Supervisor, Site Engineers and Environment Advisor will monitor rainfall events on site.

The criteria for monitoring rain events and the associated response is provided in Table 14.

Table 14: Meteorological monitoring program

Event	Criteria	Response
Rain event	>10mm in 24 hours	Inspect any rumble grid and wheel-wash facilities Inspect adjacent roads for signs of mud tracking Inspect site sediment and erosion controls for effectiveness/ maintenance Inspect outlets to determine any change in water quality

Visual inspections as outlined in Table 14 will include the following monitoring parameters:

- ▶ Water clarity and colour;
- ▶ Odour;
- ▶ Description of flow and quantity;
- ▶ Oil and grease determination;
- ▶ Details of any foreign objects within the water; and
- ▶ Visible runoff (into the water body).

Downer will maintain a record of inspections (including photographs) on their document management system.

Where water quality issues are visibly observed, Downer will investigate further to determine if the source of the issue is related to Downer’s construction activities (where possible, noting safe access limitations). Downer’s Environmental Manager or delegate will discuss any visible changes in water quality associated with Construction with the Construction Team to determine if further controls may be implemented.

Once works in a particular area have been completed and any disturbed ground (associated with the Project works) reinstated to a suitable condition, the associated visual inspections within the particular areas will cease.

It is noted that post-rainfall inspections within 24 hours of some drainage crossings and outlets may not be possible in some circumstances, including:

- ▶ Where there are safety concerns, or access is restricted due to rail safe working requirements; and/or
- ▶ Where erosion and sediment controls prevent access to an outlet and removing these controls would present a risk to water quality (i.e. removing drain guards).

### 6.8 Reporting

CoA C14 states that “The results of the Construction Monitoring Programs must be submitted to the Secretary for information, and relevant regulatory agencies, for information in the form of a Construction Monitoring Report at the frequency identified in the relevant Construction Monitoring Program”.

Relevant agencies are identified within CoA C8(b). As such, a Construction Monitoring Report will be submitted on a six-monthly basis to the following agencies;

- ▶ DPE;
- ▶ EPA; and
- ▶ CoCB.

The Independent Environmental Representative will review the Construction Monitoring Report prior to submission. Downer will participate in further consultation with the referred agencies where any relevant water quality issues are identified by the monitoring.

### 6.9 Adaptive management

Where water issues are visibly observed, or if water quality monitoring results indicate that discharge criteria are not being achieved or are otherwise unsatisfactory, then appropriate additional mitigation measures will be investigated and implemented. Work methods and management practices will be assessed and revised or adapted when necessary. Investigation and implementation of additional mitigation measures will be the responsibility of Downer’s Environmental Manager, in consultation with their wider Project team, Sydney Metro and the ER. These measures may include:

- ▶ Additional, more frequent or extended water quality monitoring;
- ▶ Amending monitoring locations and parameters where necessary;
- ▶ Inspection of work site to identify possible sources of excess sediment or other contaminants;
- ▶ Inspection of ERSED and other environmental controls for condition, suitability, effectiveness and compliance with the applicable ESCP;
- ▶ Repair, replace or reinstate any deficient ERSED controls;
- ▶ Implement additional or enhanced ERSED controls where necessary, which may include:
  - Enhanced use of soil stabilisers to minimise erosion;
  - Stabilisation of exposed ground and drainage channels by means of geofabric, crushed rock or hydroseeding;
  - Water velocity control measures such as rock check dams or earth bunds;
  - Additional sediment-trapping devices, such as double-layer barriers at drainage points;
  - Stabilisation of vehicle and pedestrian routes with crushed rock, roadbase or spray seal;
- ▶ Review construction practices and amend where necessary, such as management of stockpiles, ceasing activities during rain events, access road maintenance;
- ▶ Investigation and advice from subject-matter experts such as a soil conservationist;
- ▶ Review and update ESCP to include any additional or enhanced control measures; and
- ▶ Additional training and/or awareness for Downer’s staff and sub-contractors.

Downer will also advise Sydney Metro and the ER should water issues are visibly observed, or if water quality monitoring results indicate that discharge criteria are not being achieved or are otherwise unsatisfactory. Any minor changes made to the Water Quality Monitoring Program would be subject to ER review and approval in accordance with CoA C13. Changes other than those of a minor nature would require approval from the Planning Secretary.

## 7 TRAINING

All personnel working on site will undergo site induction training relating to soil and water management issues. The training will cover the following issues such as:

- ▶ Legislative requirements (POEO Act, EPL etc.) including Section 120;
- ▶ Erosion and sedimentation control planning and hold points;
- ▶ Duty to notify of environmental harm (or the potential for it) including chain of reporting;
- ▶ Spill containment and management procedure;
- ▶ Storage and use of hazardous chemicals and dangerous goods;
- ▶ Water discharge and reuse procedure;
- ▶ Maintenance of environmental controls (e.g. erosion and sediment controls); and
- ▶ Contamination and Unexpected Finds.

Detailed training will be provided to key personnel regarding erosion and sediment control. This training will include:

- ▶ Legislation as it applies to erosion and sediment control;
- ▶ Basics of soil management, handling and stockpiling;
- ▶ Appropriate use, installation and maintenance of various erosion and sediment control techniques;
- ▶ Effective site rehabilitation and stabilisation;
- ▶ Use of erosion control techniques such as geotextiles, organic fibre mats, mulches and soil polymer stabilisers;
- ▶ Preparing, reading and interpreting ESCPs;
- ▶ Typical controls around existing drains and maintenance of controls;
- ▶ Relevant sampling, testing and reporting requirements; and
- ▶ Toolbox talks will also be used to further reinforce awareness of Soil and Water issues.

Further details regarding staff induction and training are outlined in Section 3.5 of the CEMP.



## 8 MONITORING, AUDITING AND REPORTING

Downer will regularly review the Project activities to ensure compliance with this Plan. A regular inspection, program for soil and water will be conducted as follows:

- ▶ Details of daily inspections undertaken by the Site Supervisor will be logged in their respective site diaries;
- ▶ Routine weekly inspections are to be conducted to monitor erosion and sediment controls in active worksites. Weekly inspections will be documented;
- ▶ Pre/Post inclement weather events will be recorded within the Inclement Weather Inspection Form; and
- ▶ Inspect the operation of soil and water management works installed on the premises and undertake any works required to repair and/or maintain these controls:
  - at least weekly during normal construction hours;
  - prior to any major rainfall event forecasted (>20mm, in 24 hours);
  - daily following a major rainfall event in any 24-hour period (>20mm), if safe to do so; and
  - prior to any site closure of greater than 24 hours.

Typical records generated and maintained would include:

- ▶ Copies of current ESCPs for all active construction sites;
- ▶ Records of soil and water inspections undertaken;
- ▶ Observations and works undertaken to repair and/or maintain soil and water management works;
- ▶ Records of testing of any water prior to discharge;
- ▶ Records of the release of the hold point to discharge water from the construction site to the receiving environment;
- ▶ Records of water quality monitoring and results;
- ▶ Unexpected finds; and
- ▶ Records for contamination management – soil classification, spoil tracking, disposal dockets, remedial action plans, occupational hygienist clearances, and Site Auditor sign-offs.

As stated in Section 0, the results of the Water Quality Monitoring Program will be provided to DPE, EPA, and CoCB, in the form of a Construction Monitoring Report. The Construction Monitoring Report will be produced and submitted on a six-monthly basis, within 6 weeks of the end of each monitoring period. The Construction Monitoring Report will include a summary of monitoring undertaken, an overview of the results, analysis of the results and raw data from monitoring.

Complaints and enquiries relating to soil and water management will be managed in accordance with the Sydney Metro Overarching Community Communication Strategy (OCCS) and Section 3.7 and 3.9 of the CEMP.

Incidents, non-conformances and non-compliances that relate to soil and water management will be managed in accordance with Section 3.10 of the CEMP.

## 9 REVIEW AND IMPROVEMENT

The SWMP will be reviewed on a six-monthly basis and earlier if required taking into account below:

- ▶ The status and progress of The Project's activities;
- ▶ Changes in the design, delivery and operations processes and conditions;
- ▶ The adaptive Water Quality Monitoring Program and results;
- ▶ Lessons learnt during delivery and operations;
- ▶ Changes in other related Project Plans;
- ▶ Requirements and matters not covered by the existing Project Plans;
- ▶ Changes to Project Plans as directed by Sydney Metro's Representative under the Deed;
- ▶ Where deemed appropriate in relation to items raised within inspections or audits;
- ▶ Lessons learnt from incident, events or near misses;
- ▶ Feedback from Compliance Tracking Reports; and
- ▶ Feedback on Construction Monitoring Program results.

## 10 SWMP ADMINISTRATION

### 10.1 Hold points

Soil and water management pre-construction and construction hold points are included within Table 15.

Table 15: SWMP hold points

Item	Process Held	Acceptance Criteria	Approval Authority
CEMP and Sub-plans	Site activities (Prior to construction commencement)	Site specific CEMP and Sub-plans (including this SWMP) have been developed, reviewed, endorsed by the ER and approved by DPE.	ER Endorsement DPE Approval.
Reuse or Discharge of water	Dewatering activities (During construction)	Implementation of requirements within Section 5.2 of this plan, prior to any discharge off the premises or reuse within the premises.	Environmental Manager or Coordinator
Water Quality Monitoring Program Amendments (CoA C13)	Amendments to Water Quality Monitoring Program (during construction, as per CoA C13)	Amendments have been reviewed and approved for implementation	ER Endorsement and Approval
Specific Environmental Control Maps (ECMs)/ progressive ESCPS	Hurlstone Park Station works Belmore Station works Wiley Park Station works	ECMs/PESCPs are developed with site specific environmental controls/mitigation measures with site supervisor/engineers for work activities and are to be implemented prior to works commencing (or a new work stage as appropriate)	Environmental Manager or Coordinator

### 10.2 Records

Records associated with this management plan and monitoring program will be maintained in accordance with Section 3.16 of the CEMP

# **APPENDIX A – OTHER CONDITIONS OF APPROVAL, REVISED ENVIRONMENTAL MITIGATION MEASURES AND CEMF REQUIREMENTS RELEVANT TO THIS PLAN**

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

### Other relevant CoA relevant to the development of this Plan

CoA No.	Condition Requirement	Document Reference
E8	The location of Construction compounds must not worsen the existing flooding characteristics of the area.	Section 5.4
E9	Where the CSSI will worsen flooding impacts, the Proponent is responsible for implementing measures to address those impacts.	Section 3.6 Section 5.4
E38	All reasonably practicable erosion and sediment controls must be installed and appropriately maintained to minimise water pollution. When implementing such controls, any relevant guidance in the Managing Urban Stormwater series must be considered.	Section 5.1.4
E39	An Unexpected Contaminated Land Procedure and Asbestos Finds Procedure must be prepared and must be followed should unexpected contaminated land or asbestos be excavated or otherwise discovered during Construction.	Section 5.8 Appendix B
E40	The Unexpected Contaminated Land Procedure and Asbestos Finds Procedure must be implemented throughout Construction.	Section 5.8 Appendix B
E41	Dangerous goods, as defined by the Australian Dangerous Goods Code, must be stored and handled strictly in accordance with: (a) All relevant Australian Standards; (b) For liquids, a minimum bund volume requirement of 110% of the volume of the largest single stored volume within the bund; and (c) The Environment Protection Manual for Authorised Officers: Bunding and Spill Management technical bulletin (EPA, 1997). In the event of an inconsistency between the requirements listed from (a) to (c) above, the most stringent requirement shall prevail to the extent of the inconsistency.	Section 5.6

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

### REMM relevant to the development of this Plan

REMM No.	REMM Requirement	Timing	Document Reference
Soils and contamination			
SC1	Erosion and sediment control measures would be implemented in accordance with Managing Urban Stormwater: Soils and Construction Volume 1 (Landcom, 2004) and Managing Urban Stormwater: Soils and Construction Volume 2A (DECC, 2008). Measures would be designed as a minimum for the 80th percentile, five day rainfall event.	Design/pre-construction	Section 5.1.4
SC2	Prior to ground disturbance in high probability acid sulfate areas, testing would be carried out to determine the presence of acid sulfate soils. If acid sulfate soils are encountered, they would be managed in accordance with the Acid Sulfate Soil Manual (Acid Sulfate Soil Management Advisory Committee, 1998) and the Waste Classification Guidelines - Part 4: Acid Sulfate Soils (EPA, 2014).	Design/pre-construction	Section 5.11
SC3	Prior to ground disturbance in areas of potential soil salinity, testing would be carried out to confirm the presence of saline soils. If saline soils are encountered, they would be managed in accordance with Site Investigations for Urban Salinity (DLWC, 2002).	Design/pre-construction	Section 5.10
SC4	WorkCover dangerous goods searches would be carried out for properties that have potential contamination near Belmore Station, to provide additional site characterisation and identify the risk of contamination in these areas	Design/pre-construction	Section 3.3 Section 5.7
SC5	Prior to ground disturbance, a detailed contamination assessment would be undertaken in areas with a medium to high risk of contamination, to confirm the nature and extent of contamination, specific requirements for further investigation and remediation, and/or management requirements of any contamination.	Design/pre-construction	The areas with a medium to high risk of contamination as published in the EIS are outlined in Table 6. No areas with a medium to high risk of contamination have been identified within proximity of this Project. Phase 2 contamination assessments that have been carried out along the rail corridor, at station precincts and at Stations are outlined in Section 3.3.
SC6	Hazardous materials surveys would be undertaken during detailed design for all proposed demolition activities, and for utility adjustments as required.	Design/pre-construction	Section 3.3.1

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

REMM No.	REMM Requirement	Timing	Document Reference
SC7	In the event a Remediation Action Plan is required, it would be developed in accordance with Managing Land Contamination: Planning Guidelines SEPP 55 – Remediation of Land (Department of Urban Affairs and Planning and Environment Protection Authority, 1998) and a NSW Environment Protection Authority Accredited site auditor would be engaged to audit the works.	Design/pre-construction	Section 3.3
SC8	In the event that indicators of contamination are encountered during construction (such as odours or visually contaminated materials), work in the area would cease, and the finds would be managed in accordance with the unexpected contamination finds procedure.	Construction	Section 5.8 Appendix B
Hydrology, flooding and water quality			
FHW1	Where feasible and reasonable, detailed design would result in no net increase in stormwater runoff rates in all storm events, unless it can be demonstrated that increased runoff rates as a result of the project would not increase downstream flood risk.	Design/pre-construction	Section 3.6
FHW2	Detailed design of the project would, as required at Bankstown between Stacy Street and Marion Street, take into account the impact of overland flooding for the full range of flood events up to the Probable Maximum Flood level.	Design/pre-construction	FHW2 relates to Bankstown Station upgrade. As outlined in the Staging Report, this is outside the scope of this Project and is not relevant.
FHW3	The project would be designed in accordance with water quality design criteria based on the Water Sensitive Urban Design Guideline (Roads and Maritime, 2017) to ensure there is minimal potential for water quality impacts, including incorporating water sensitive urban design elements.	Design/pre-construction	REMM FHW3 relates to the Project's design and is not relevant to the content of this SWMP.
FHW5	Detailed construction planning would consider flood risk for all compounds and work sites. This would include identification of measures to not worsen existing flooding characteristics. Not worsen is defined as: <ul style="list-style-type: none"> <li>a maximum increase in flood levels of 50 mm in a one per cent AEP event</li> <li>a maximum increase in time of inundation of one hour in a one per cent AEP event</li> <li>no increase in the potential for soil erosion and scouring from any increase in flow velocity in a one per cent AEP flood event.</li> </ul>	Construction	Section 5.4

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

REMM No.	REMM Requirement	Timing	Document Reference
FHW6	The site layout and staging of construction activities would: <ul style="list-style-type: none"> <li>avoid or minimise obstruction of overland flow paths and limit the extent of flow diversion required</li> <li>consider how works would affect the existing stormwater network such that alternatives are in place prior to any disconnection or diversion of stormwater infrastructure.</li> </ul>	Construction	Section 5.4
FHW7	Works within or near watercourses (including the Cooks River) would be undertaken with consideration given to the NSW Office of Water's guidelines for controlled activities.	Construction	No works are proposed within or near watercourses for this Project. Section 3.5.1
FHW8	Erosion and sediment mitigation measures would be installed and maintained for the duration of the construction period.	Construction	Section 5.1
FHW9	The water quality monitoring program would continue during construction, to monitor water quality at identified discharge points.	Construction	Section <b>Error! Reference source not found.</b> Section 6.4
FHW10	Discharges from construction water treatment devices would be monitored to ensure compliance with the discharge criteria in the environment protection licence.	Construction	Section 5.2.2
Hazards, risks and safety			
HRS4	All hazardous substances that may be required for construction and operation would be stored and managed in accordance with the Storage and Handling of Dangerous Goods Code of Practice (WorkCover NSW, 2005) and the Hazardous and Offensive Development Application Guidelines: Applying SEPP 33 (Department of Planning, 2011).	Construction and operation	Section 5.6



## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

### CEMF requirements relevant to the development of this Plan

CEMF Section	CEMF Requirement	Document Reference
15.1 (a)	<p>The following soil and water management objectives will apply to construction:</p> <ul style="list-style-type: none"> <li>• Minimise pollution of surface water through appropriate erosion and sediment control.</li> <li>• Maintain existing water quality of surrounding surface watercourses.</li> <li>• Source construction water from non-potable sources, where feasible and reasonable.</li> </ul>	<p>Section 1.3 Table 1</p>
15.2 (b)	<p>Principal Contractors will develop and implement progressive erosion and sediment control plans (ESCPs) for all active worksites in accordance with Managing Urban Stormwater: Soils &amp; Construction Volume 1 (Landcom, 2004) (known as the “Blue Book”). The ESCPs will be approved by the Contractor’s Environmental Manager (or delegate) prior to any works commencing (including vegetation clearing) on a particular site. Copies of the approved ESCP will be held by the relevant Contractor personnel including the Engineer and the Site Foreman.</p>	Section 5.1.4
15.2 (c)	<p>ESCPs will detail all required erosion and sediment control measures for the particular site at the particular point in time and be progressively updated to reflect the current site conditions. Any amendments to the ESCP will be approved by the Contractor’s Environmental Manager (or delegate).</p>	Section 5.1.4
15.2 (d)	<p>Principal Contractors will develop and implement Stormwater and Flooding Management Plans for the relevant construction sites. These plans will identify the appropriate design standard for flood mitigation based on the duration of construction, proposed activities and flood risks. The plan will develop procedures to ensure that threats to human safety and damage to infrastructure are not exacerbated during the construction period.</p>	<p>Stormwater and Flooding Management Plans will be developed by the Principal Contractor prior to Construction where constructions sites are within the 100-year ARI +10% increase in rainfall flood zone.</p>
15.2 (e)	<p>Principal Contractors will undertake the following soil and water monitoring as a minimum:</p> <ul style="list-style-type: none"> <li>• Weekly inspections of the erosion and sediment control measures. Issues identified would be rectified as soon as practicable.</li> <li>• Additional inspections will be undertaken following significant rainfall events (greater than 20 mm in 24 hours).</li> <li>• All water will be tested (and treated if required) prior to discharge from the site in order to determine compliance with the parameters of the EPL. No water will be discharged from the site without written approval of the Contractor’s Environmental Manager (or delegate). This is to form a HOLD POINT.</li> </ul>	<p>Section 1.3 Section <b>Error! Reference source not found.</b> Section 10.1</p>

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

CEMF Section	CEMF Requirement	Document Reference
15.2 (f)	<p>The following compliance records will be kept by the Principal Contractors:</p> <ul style="list-style-type: none"><li>• Copies of current ESCPs for all active construction sites.</li><li>• Records of soil and water inspections undertaken.</li><li>• Records of testing of any water prior to discharge.</li><li>• Records of the release of the hold point to discharge water from the construction site to the receiving environment.</li></ul>	Section 10.2
15.2 (g)	<p>The following water resources management objectives will apply to the construction of the project:</p> <ul style="list-style-type: none"><li>• Minimise demand for, and use of potable water.</li><li>• Maximise opportunities for water re-use from captured stormwater, wastewater and groundwater.</li><li>• Examples of measures to minimise potable water consumption include:<ul style="list-style-type: none"><li>– Water efficient controls, fixtures and fittings in temporary facilities.</li><li>– Collecting, treating and reusing water generated in tunnelling operations, concrete batching and casting facility processes.</li><li>– Using recycled water or treated water from onsite sources in the formulation of concrete.</li><li>– Harvesting and reusing rainwater from roofs of temporary facilities.</li><li>– Using water from recycled water networks.</li><li>– Collecting, treating and reusing groundwater and stormwater.</li><li>– Using water efficient construction methods and equipment.</li><li>– Providing designated sealed areas for equipment wash down.</li></ul></li></ul>	Refer to Sustainability Management Plan Section 5.3
15.3 (a)	<p>Examples of surface water and flooding mitigation measures include:</p> <ul style="list-style-type: none"><li>• Clean water will be diverted around disturbed site areas, stockpiles and contaminated areas.</li><li>• Control measures will be installed downstream of works, stockpiles and other disturbed areas.</li><li>• Exposed surfaces will be minimised, and stabilised / revegetated as soon feasible and reasonable upon completion of construction.</li><li>• Dangerous good and hazardous materials storage will be within bunded areas with a capacity of 110 per cent of the maximum single stored volume.</li><li>• Spill kits will be provided at the batch plants, storage areas and main work sites.</li></ul>	Section 5

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

The table below presents the compliance matrix for the EPL 12208 Clauses relating to construction soil and water.

EPL Clause	Requirement / Measure	Document Reference
<b>Pollution of waters</b>		
L1.1	Except as may be expressly provided in any other condition of this licence, the licensee must comply with section 120 of the Protection of the Environment Operations Act 1997.	Section 2 Section 5
<b>Erosion and sediment control</b>		
O13.7	The licensee must, before and during maintenance activities, implement all feasible and reasonable erosion and sediment controls to minimise sediment leaving the Sydney Trains Network.	Section 5.1
O13.8	Erosion and sediment controls must be designed, constructed, operated and maintained in accordance with “Managing Urban Stormwater: Soil and Construction, Volume 1, 4 <sup>th</sup> Edition” (Landcom, 2004) to be read and used in conjunction with the relevant DECC Managing Urban Stormwater – Soils and Construction volume.	Section 5.1


## **APPENDIX B – UNEXPECTED CONTAMINATED LAND AND ASBESTOS FINDS PROCEDURE**

# Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105



## UNEXPECTED CONTAMINATED LAND AND ASBESTOS FINDS PROCEDURE

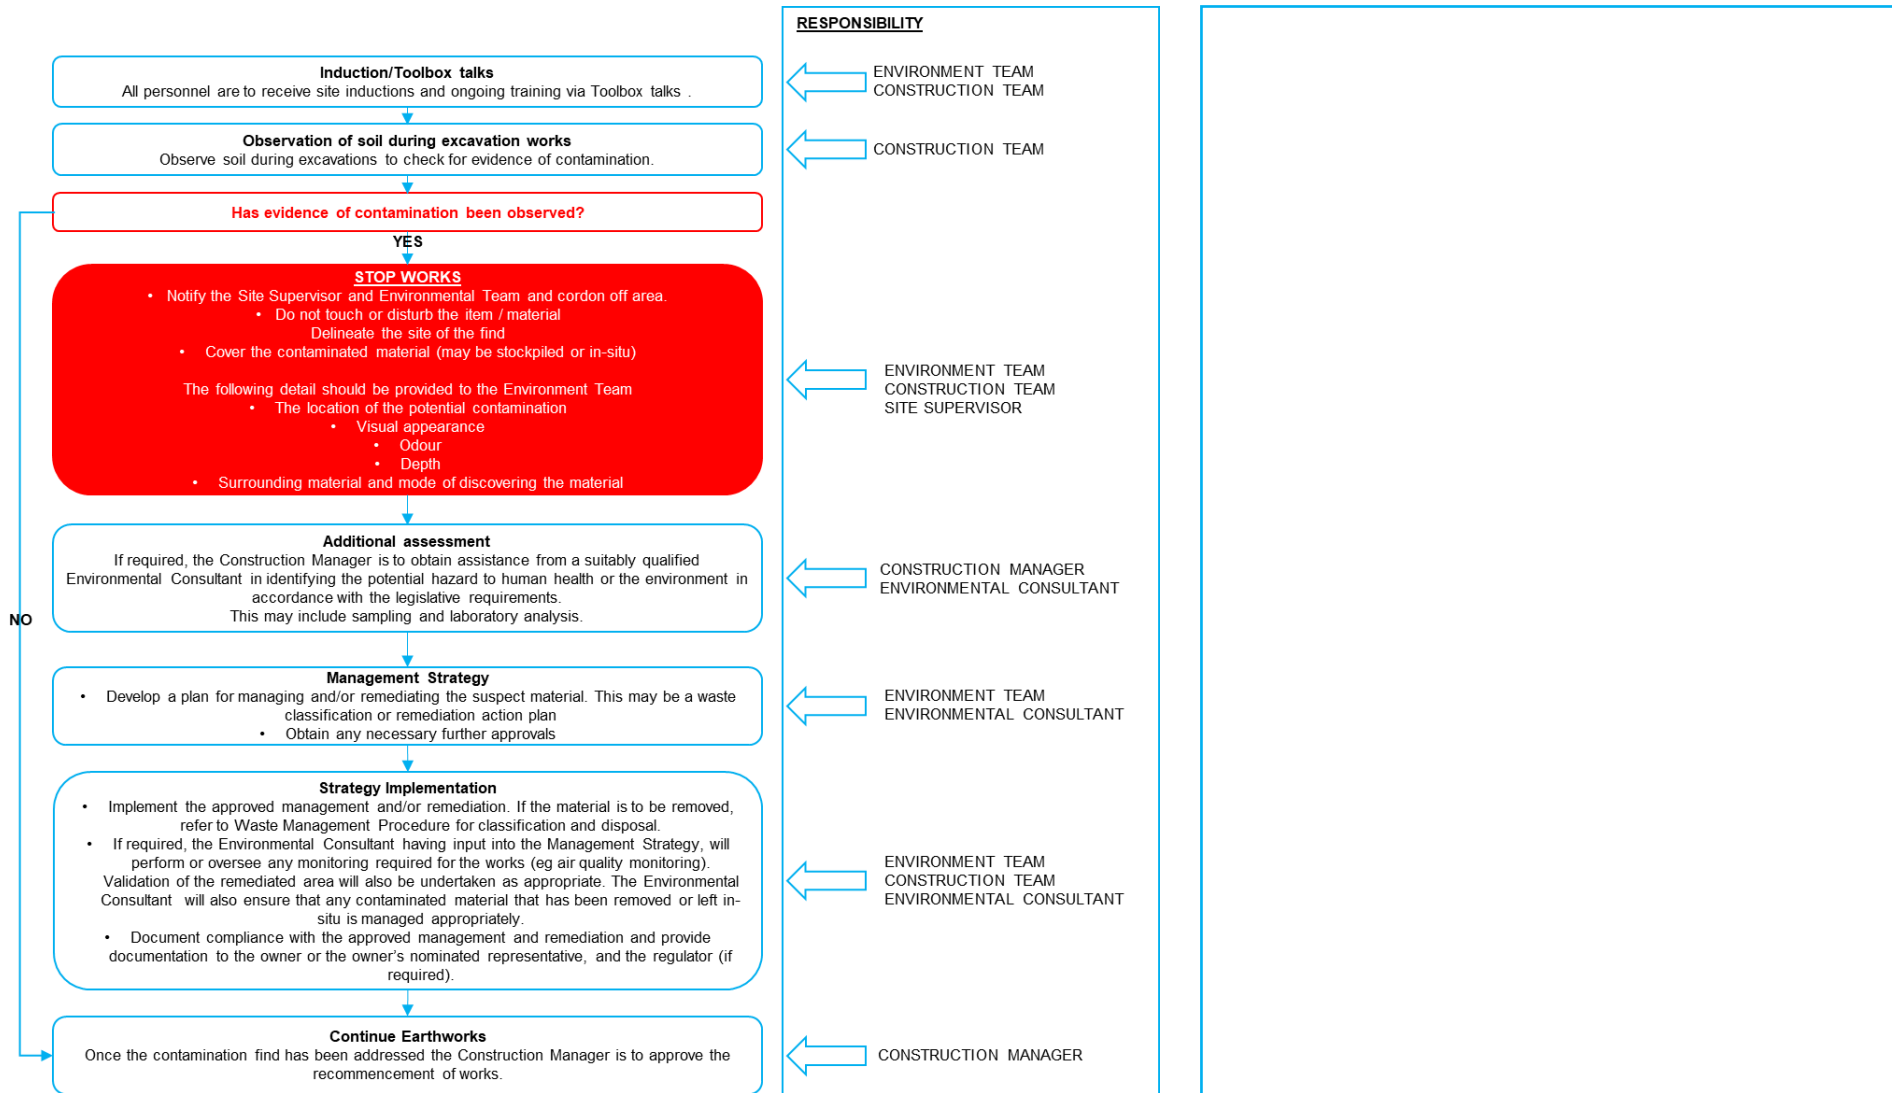

# APPENDIX C – ACID SULFATE SOILS TREATMENT PROCESS

### 8.4.5 Soil treatment procedure

Acid sulfate soil material should be placed on the treatment pad (see Figure 8-1) or fill area in layers up to 300 mm thick. Thinner layers of soil can be more easily and thoroughly dried and mixed; 300 mm is suggested as a maximum, not only to prevent inadequate mixing but to prevent equipment from bogging and to allow compaction to improve strength, thus minimising subsidence and heave when filling. Once the ASS is dry enough to work, the appropriate amount of neutralising agent, calculated to include the safety factor, should be spread. The ASS may need reworking several times to achieve adequate mixing of the neutralising agent and/or drying of the soil.

The treated layer will require verification testing (see section 8.2 and ASS tips 13 and 14) to confirm whether enough neutralising agent has been incorporated into the soil. Treated and verified soil should be subsequently compacted before treatment of the next layer begins, or when moved to the permanent placement area if first mixed on temporary treatment pads. Compaction is not necessary if the treated soil is permitted to be disposed of or reused elsewhere.

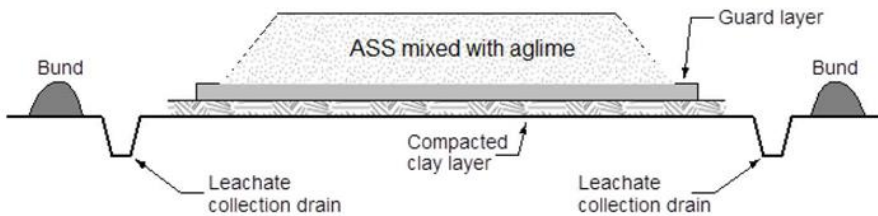


Figure 8-1: Schematic cross-section of a treatment pad, including a compacted clay layer, guard layer, leachate collection system and containment with bunding

Where soil mixing machinery (e.g. Figure 8-2) is used, soil treatment should still be carried out in a bunded and sealed area as per section 8.4.3. Treated batches should be spatially arranged in such a manner that re-treatment is easy in cases of verification test failure.

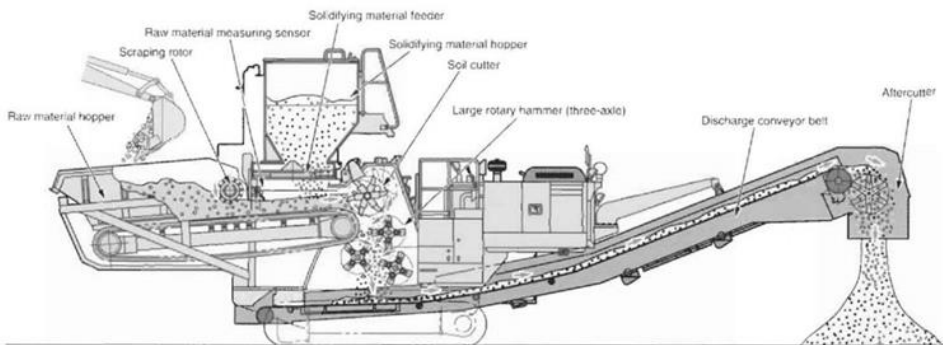


Figure 8-2: Cross-sectional view of soil mixing machinery (Komatsu, 2003). Note that soil treatment with such machinery should be carried out in an appropriately contained area, including bunding and measures to prevent leachate infiltration.

Source: Queensland Acid Sulfate Soil Technical Manual: Soil Management Guidelines

## APPENDIX D – CONSULTATION REGISTER

Agency	Comment	Project Response
CoCB	<p><b>Email received 16/11/20</b></p> <p><i>“Thank you for sending Council the three CEMP subplans for these station upgrades.</i></p> <p><i>Council has recently provided feedback on the Construction Noise and Vibration Management Plan (NVMP) and Construction Soil and Water Management Plan (SWMP) and is currently reviewing your recently sent Construction Heritage Management Plan (HMP).</i></p> <p><i>I will send you with any feedback on the HMP as soon as it becomes available from the relevant Council officers.</i></p> <p><i>Please contact me should you have any queries.”</i></p> <p>No comments were provided by CoCB in the email issued 16/11/20. A follow up email received 24/11/20 confirmed that CoCB had no comments on the Soil and Water Management Plan for the Project.</p>	Noted. No changes to this SWMP proposed.
NRAR	<p>Issued for consultation 6/11/20.</p> <p>Invited to consultation workshop 16/11/20.</p> <p>Followed up with phone call 26/11/20.</p> <p>Followed up with phone call 17/12/20.</p> <p>Followed up with phone call 21/12/20.</p> <p><b>Email received 12/01/21:</b></p> <p><i>“It is NRARs understanding in 2021 Sydney Metro will start upgrades to stations between Marrickville and Bankstown, as part of the Sydney Metro City and Southwest - Sydenham to Bankstown Upgrade project. You are seeking input from NRAR as a condition of consent under SSI-8256 for the Construction Soil and Water Management Sub-plans for the three station upgrades listed below.</i></p> <p><i>NRAR have no comment on the sub-plans for the following proposed station upgrade projects:</i></p> <ol style="list-style-type: none"> <li><i>1. Marrickville, Canterbury and Lakemba Station upgrade project</i></li> <li><i>2. Dulwich Hill, Campsie and Punchbowl Station upgrade project</i></li> <li><i>3. Hurlstone Park, Belmore and Wiley Park Station upgrade project</i></li> </ol> <p><i>Kind regards”</i></p>	Noted. No changes to this SWMP proposed.
DPE - EESG	<p><b>Email received 20/11/20:</b></p> <p><i>“EES will not be providing comments on the sub-plan. Please note that this should not be considered as support for the plan. If you have any questions, please do not hesitate to contact me.”</i></p>	Noted. No changes to this SWMP proposed.

## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

Agency	Comment	Project Response
NSW EPA	<p><b>Email received 2/12/20:</b></p> <p><i>“Sorry about the delay in responding. This will be the same response as the previous request;</i></p> <p><i>The EPA’s position on post approval management plans, including the CEMP, is to encourage the development of such plans to ensure that proponents have determined how they will meet their statutory obligations and designated environmental objectives.</i></p> <p><i>However, we do not approve or endorse these documents as our role is to set environmental objectives for environmental management and not to be directly involved in the development of strategies to achieve those objectives. Therefore we will not be providing comments on the CEMP and associated sub-plans.</i></p> <p><i>The EPA may however request such documents are submitted with Environment Protection Licence applications or variations to ensure compliance with s45 of the POEO Act and to support those decisions.</i></p> <p><i>Please let me know if you need any further information.”</i></p>	Noted. No changes to this SWMP proposed.



# APPENDIX E – SYDNEY METRO WATER DISCHARGE OR REUSE PROCEDURE AND FORM

OFFICIAL



## Water Discharge & Reuse Procedure

SM-17-00000098

Metro Body of Knowledge (MBoK)

<b>Applicable to:</b>	Sydney Metro
<b>Document Owner:</b>	Manager, Environment
<b>System Owner:</b>	Executive Director, Safety, Sustainability & Environment
<b>Status:</b>	FINAL
<b>Version:</b>	3.0
<b>Date of issue:</b>	27 March 2019
<b>Review date:</b>	27 March 2020
© Sydney Metro 2019	

OFFICIAL

**OFFICIAL**

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



**Table of contents**

- 1. Purpose and scope..... 3**
- 2. Accountabilities ..... 3**
- 3. Definitions ..... 3**
- 4. Water Discharge and Reuse Procedure ..... 5**
  - 4.1. Water Management ..... 5
  - 4.2. Legislative Requirements..... 5
  - 4.3. Water Management and Discharge ..... 6
  - 4.4. Requirements for Discharge to Waters..... 7
  - 4.5. Calibration..... 8
    - 4.5.1. Treating Water Prior to Discharge ..... 8
  - 4.6. Requirements for Discharge to Land ..... 9
    - 4.6.1. Determining a Suitable Discharge Location ..... 9
    - 4.6.2. Criteria for Discharge to Land..... 9
  - 4.7. Reuse on Site ..... 10
    - 4.7.1. Criteria for Reuse on Site ..... 10
  - 4.8. Discharging Water ..... 10
    - 4.8.1. Monitoring and Maintenance ..... 12
    - 4.8.2. Record Keeping..... 12
- 5. Related documents and references ..... 12**
- 6. Superseded documents ..... 12**
- 7. Document history ..... 12**

**Figures**

- Figure 1: Process for testing water to determine options for removal, reuse, treatment or discharge ..... 11**

**Tables**

- Table 1: POEO classification of offences ..... 5**
- Table 2: Criteria for Discharge to Waters ..... 7**
- Table 3: Salinity and TSS ..... 7**
- Table 4: Treating water to discharge ..... 8**

OFFICIAL

Metro Body of Knowledge (MBoK)  
(Uncontrolled when printed)



## 1. Purpose and scope

The purpose of this Procedure is to provide guidance to site personnel for managing, discharging and reusing excess water on Sydney Metro construction sites. This Procedure includes references to relevant industry guidelines but is not intended to replace them, nor does it override the relevant legislative and regulatory requirements.

Principle Contractors may be required to develop their own procedure that is consistent with this document via clause 3.1(f) of the Construction Environmental Management Framework (CEMF).

## 2. Accountabilities

The Executive Director, Safety, Sustainability & Environment is accountable for this Procedure. Accountability includes authorising the document, monitoring its effectiveness and performing a formal document review.

Direct Reports to the Chief Executive are accountable for ensuring the requirements of this document are implemented within their area of responsibility.

The Direct Reports to the Chief Executive who are accountable for specific projects/programs are accountable for ensuring associated contractors comply with the requirements of this document.

## 3. Definitions

All terminology in this Procedure is taken to mean the generally accepted or dictionary definition. Terms and jargon specific to this Procedure are defined within [SM-17-00000203 Sydney Metro Glossary](#), or are listed below.

Definitions	
The Blue Book	<i>Managing Urban Stormwater: Soils &amp; Construction</i> 2004, Landcom.
CEMP	<i>Construction Environmental management plan</i>
Environment Manager	Contractor Environment Manager.
EPA	NSW Environment Protection Authority
EPL	Environment protection licence issues in accordance with the POEO Act by the EPA
pH	The measure of the acidity or alkalinity of a solution.
POEO Act	Protection of the Environment Operations Act 1997.
NATA	National Association of Testing Authorities, Australia
NTUs	Nephelometric turbidity units
TSS	Total Suspended Solids.
Waters	(as defined in the POEO Act) means the whole or any part of: a) any river, stream, lake, lagoon, swamp, wetlands, unconfined surface water, natural or artificial watercourse, dam or tidal waters (including the sea), or b) any water stored in artificial works, any water in water mains, water pipes or water channels, or any underground or artesian water.

**OFFICIAL**

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



Definitions	
<b>Water pollution or Pollution of waters</b>	<p>As defined in the POEO Act water pollution or pollution of waters means:</p> <ul style="list-style-type: none"> <li>a) placing in or on, or otherwise introducing into or onto, waters (whether through an act or omission) any matter, whether solid, liquid or gaseous, so that the physical, chemical or biological condition of the waters is changed, or</li> <li>b) placing in or on, or otherwise introducing into or onto, the waters (whether through an act or omission) any refuse, litter, debris or other matter, whether solid or liquid or gaseous, so that the change in the condition of the waters or the refuse, litter, debris or other matter, either alone or together with any other refuse, litter, debris or matter present in the waters makes, or is likely to make, the waters unclean, noxious, poisonous or impure, detrimental to the health, safety, welfare or property of persons, undrinkable for farm animals, poisonous or harmful to aquatic life, animals, birds or fish in or around the waters or unsuitable for use in irrigation, or obstructs or interferes with, or is likely to obstruct or interfere with persons in the exercise or enjoyment of any right in relation to the waters, or</li> <li>c) placing in or on, or otherwise introducing into or onto, the waters (whether through an act or omission) any matter, whether solid, liquid or gaseous, that is of a prescribed nature, description or class or that does not comply with any standard prescribed in respect of that matter,</li> </ul> <p>and, without affecting the generality of the foregoing, includes:</p> <ul style="list-style-type: none"> <li>d) placing any matter (whether solid, liquid or gaseous) in a position where:                             <ul style="list-style-type: none"> <li>i. it falls, descends, is washed, is blown or percolates, or</li> <li>ii. it is likely to fall, descend, be washed, be blown or percolate,</li> </ul>                             into in to any waters, onto the dry bed of any waters, or into any drain, channel or gutter used or designed to receive or pass rainwater, floodwater or any water that is not polluted, or                         </li> <li>e) placing any such matter on the dry bed of any waters, or in any drain, channel or gutter used or designed to receive or pass rainwater, floodwater or any water that is not polluted,</li> </ul> <p>if the matter would, had it been placed in any waters, have polluted or have been likely to pollute those waters.</p>

OFFICIAL

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



## 4. Water Discharge and Reuse Procedure

### 4.1. Water Management

During construction there is the potential for sediment laden water to be generated on construction sites. In particular in areas where there is no ground cover, where earthworks have been carried out and in low lying points on the site. It is essential that this sediment laden water is contained and managed on site through suitable erosion and sediment controls and only discharged once it has been treated and tested to ensure there is no harm caused to surrounding waterways and ecosystems.

### 4.2. Legislative Requirements

The Protection of the Environment Operations Act 1997 (POEO Act) is the key piece of environmental legislation in NSW administered by the Environment Protection Authority (EPA). Offences under this Act are classified into three tiers, with Tier 1 offences being the most serious – attracting up to \$5 million in the case of a corporation and \$1 million for an individual and seven years imprisonment for wilful or negligent harm to the environment.

Table 1: POEO classification of offences

Classification of offence	Description
Tier 1	These offences are the offences under Part 5.2 of the POEO Act 1997 and include the wilful or negligent disposal of waste causing or likely to cause harm to the environment (section 115), wilfully or negligently causing a substance to leak, spill or otherwise escape in a manner that harms or is likely to harm the environment (section 116), and the wilful or negligent emission of an ozone-depleting substance in breach of the Ozone Protection Regulations in a manner that harms or is likely to harm the environment (section 117).
Tier 2	Tier 2 offences are all other offences under this Act or the regulations. This includes carrying out a scheduled activity without an environment protection licence (EPL) (section 49(2)), failing to comply with a condition of an EPL (section 64(1)), pollution of waters (section 120) and failing to notify a pollution incident (section 152). The maximum penalties for the Tier 2 offence of failing to notify a pollution incident are \$2 million in the case of a corporation and \$500,000 in the case of an individual. The maximum penalties for Tier 2 offences other than failure to notify pollution incidents are \$1 million in the case of a corporation and \$250,000 in the case of an individual. Further daily penalties apply to continuing offences.
Tier 3	Tier 3 offences are tier 2 offences that may be dealt with under Part 8.2 by way of penalty notice

Under section 120 of this Act, any unlicensed water pollution event, no matter how minor, is illegal. It is a defence against prosecution under section 120 of the POEO Act if the pollution was regulated by an Environment Protection Licence (EPL) and the conditions of that EPL relating to pollution of waters were not contravened. In the absence of any specific EPL provision, however, to avoid causing pollution and breaches of Section 120, any water discharged from site must be of the same quality, or better, than the quality of the receiving waters at the time of discharge.

OFFICIAL

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



Offences attracting special executive liability are dealt with under Section 169 of the POEO Act. Section 169 specifically states that if a corporation wilfully or negligently causes any substance to leak, spill or otherwise escape (whether or not from a container) in a manner that harms or is likely to harm the environment or pollutes any waters each person who is a director of the corporation or who is concerned in the management of the corporation is taken to have contravened the same provision, unless the person satisfies the court that the person, if in such a position, used all Due Diligence to prevent the contravention by the corporation.

### 4.3. Water Management and Discharge

It is essential that the quality of the receiving waters is established through background monitoring and sampling, prior to any discharge from site, so that the potential impact of discharge water can be determined. Monitoring of the receiving waters must be undertaken prior to any land disturbance works (to establish a baseline) as well as during construction.

It is also essential that water management standards, and particularly erosion and sediment controls, are implemented to control and treat water. Landcom’s Managing Urban Stormwater: Soils & Construction 2004 (The Blue Book) is considered a best practice guideline for erosion and sediment control on construction sites in NSW. If implemented, The Blue Book will help mitigate the impacts of land disturbance activities on soils, landforms and receiving waters and minimise the potential for water pollution events to occur.

The Water quality criteria and testing and treatment techniques in this procedure are based on The Blue Book. However, compliance with The Blue Book does not, of itself, provide any defence to an alleged breach of section 120 of the POEO Act. Examples of situations where compliance with The Blue Book could still lead to a breach of section 120 are as follows:

- Water discharged with TSS below 50mg/L may still cause pollution and breach section 120, if the receiving waters have a TSS less than 50mg/L at the time the discharge occurs.
- Appropriate erosion and sediment controls are in place, but a rainfall event occurs beyond the design capacity of those controls.
- Should a water pollution incident occur, being able to demonstrate due diligence in the implementation of environmental controls, and particularly erosion and sediment controls, may provide a defence against prosecution. Due diligence may be recognised if the proponent is able to demonstrate that erosion & sediment controls have been implemented in accordance with the requirements of The Blue Book. The Contractor must satisfy itself that appropriate management controls have been developed, implemented, maintained and documented to establish a due diligence defence.

All water discharges must be documented using [SM-17-00000109 Water Discharge or Reuse Approval Form](#) or site-specific equivalent. Discharge is not permitted until the Contractor Environment Manager or nominated representative has signed the discharge form. Note that in some cases the Sydney Metro Manager Environment or the Environmental Representative may be required to sign off the discharge form.

This procedure is not used for discharging water where the activity is covered by an EPL. The licence holder will have their own procedure covering the process for discharging water that addresses any site specific environmental conditions.

OFFICIAL

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



#### 4.4. Requirements for Discharge to Waters

Water to be discharged must be tested and, if required, treated to ensure that it meets water quality criteria and that pollution of the receiving waters does not occur. Results of testing and details of any treatment undertaken must be noted on [SM-17-0000109 Water Discharge or Reuse Approval Form](#).

Note that an EPL may authorise discharge of water from specific locations or premises, and establish criteria that differ from those given in this Procedure. In such circumstances the EPL, and any conditions and criteria of that EPL, take precedence over this Procedure. Before water can be discharged to any receiving waters (whether on or off site), it must as a minimum meet the following criteria.

Table 2: Criteria for Discharge to Waters

Parameter	Criterion	Method	Time prior to discharge
Oil and grease	No visible	Visual inspection	< 1 hour
pH	6.5-8.5	Probe/meter <sup>1</sup>	< 1 hour
Total Suspended Solids (TSS)	< 50mg/L <sup>2</sup>	Meter/grab sample <sup>3</sup>	< 1 hour/< 24 hours

If the criteria above are not met, the water will have to be treated and retested prior to discharge (see [Water Management and Discharge](#)). If all criteria above are met then the water may be authorised for discharge by the Manager Environment (refer to [Calibration](#)).

Table 3: Salinity and TSS

<b>1. Salinity</b>	<p>Salinity is determined by measuring the electrical conductivity (EC) of the water, using a meter. Setting an acceptable criteria range for salinity of discharge water is dependent on the salinity of the receiving waters and must be determined and applied on a site-specific basis following background water quality monitoring. Measuring discharge waters for salinity shall only be undertaken if required by:</p> <ul style="list-style-type: none"> <li>the Conditions of Approval;</li> <li>an EPL; or</li> <li>the particular conditions of the site (soil or geology) or the receiving waters.</li> </ul>
<b>2. Correlating Total Suspended Solid (TSS) with Turbidity</b>	<ul style="list-style-type: none"> <li>Consideration may be given to establishing a site-specific relationship between total suspended solids concentration (TSS) and turbidity, measured in nephelometric turbidity units (NTU). This allows the TSS to be inferred from an NTU reading. The benefit of using NTU is that it can be quickly measured on site with a hand-held meter, whereas water quality meters that measure TSS are expensive and the results from samples sent for laboratory analysis will not be available immediately. However, the relationship between TSS and NTU is highly dependent on soil type and site activities (i.e. earthmoving, extractive works, rock cutting or grinding) and NTU is affected by factors other than suspended solids, such as colour (e.g. tannins may alter the NTU reading).</li> <li>As such, a correlation curve (i.e. across a range of readings) must be determined between TSS and NTU that is specific to the site and cannot be applied to other sites. The correlation must be determined via laboratory analysis, by a NATA-accredited laboratory. Thorough records of the site-specific correlation must be kept, and any recommendations and/or limitations should be documented as part of the CEMP (For further information and guidance on correlating TSS with NTU refer to Appendix E of <i>The Blue Book</i>).</li> </ul>

<sup>1</sup> Litmus paper and pool testing kits are not to be used.

<sup>2</sup> As discussed in Section 4, a more stringent TSS criterion may need to be adopted in certain situations.

<sup>3</sup> Samples must be analysed at a NATA accredited laboratory.

OFFICIAL

Metro Body of Knowledge (MBoK)  
(Uncontrolled when printed)



## 4.5. Calibration

The goal of calibration is to minimise any measurement uncertainty by ensuring the accuracy of testing equipment which may drift over time. To be confident in the results being measured there is an ongoing need to service and maintain the calibration of equipment for reliable, accurate and repeatable measurements.

Due to the variety of water quality instruments available, it is not practical to provide instrument specific advice on storage, calibration and maintenance in this procedure. Before taking an instrument into the field, the operator should be familiar with the contents of the operating manual for that specific instrument, and ensure that it is stored, calibrated, maintained and used as per manufacturer’s instructions. Detailed records of calibration and maintenance must be kept.

### 4.5.1. Treating Water Prior to Discharge

In order to meet EPA guidelines, TSS, pH levels and oil and grease must meet the required levels listed in table 4 below. Further water treatment may be required for other impurities not listed which may exist due to soil contamination or other factors. Based on the volume of water output and levels of contamination, methods used to treat water can vary in complexity and should be risk assessed and implemented by a competent person.

Best practice methods for water treatment of stormwater for construction sites can be found in Managing Urban Stormwater Soils and Construction Volume 1 (the Blue Book). The method for water treatment selected by the contractor must be documented in a procedure which includes any relevant Safety Data Sheets and safe handling and storage requirements for the substances used. All hazardous substances and contaminants must be subject to a health risk assessment. For further details please refer to the Principal Contractor Health and Safety Standard for occupational health and hygiene requirements.

Table 4: Treating water to discharge

1. Oil and grease	<ul style="list-style-type: none"> <li>Examine surface of water immediately prior to discharge for evidence of oil and grease (e.g. sheen, discolouration).</li> </ul>
2. pH Levels	<ul style="list-style-type: none"> <li>If pH is outside the range 6.5-8.5 the water will need to be neutralised.</li> <li>Re-test the water pH following treatment – repeat as necessary, until the acceptable pH 6.5 – 8.5 range is reached.</li> </ul>
3. Total Suspended Solids (TSS)	<ul style="list-style-type: none"> <li>If TSS are greater than 50mg/L, the sediments need to settle to the bottom or be removed. This can be achieved via the following methods:                             <ul style="list-style-type: none"> <li>Natural settlement – this could take a long time or not occur at all (e.g. with dispersible clay soils), dependent on soil type and other characteristics, (refer to <i>The Blue Book</i>, Chapter 3 for further information).</li> <li>Flocculation – chemical treatment with a flocculant (e.g. gypsum). If the flocculant is being applied manually, an even application over the surface of the water is essential. If an automated dosing basin is used other flocculants such as Polyaluminium Chloride (PAC) and alum (aluminium sulphate) might also be suitable for use in this system. Only environmentally safe flocculants are to be used, based on the Environment Manager’s review of Safety Data Sheet (SDS) information.</li> <li>Filtration – pumping or gravity feeding the water through a filter medium (e.g. geofabric) to another storage area (e.g. container or sediment basin) to remove sediment. The filter medium should be disposed of to a suitable facility.</li> </ul> </li> <li>Re-testing of water is required once treatment has been undertaken to ensure criterion for TSS is met.</li> </ul>



## OFFICIAL

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



Following treatment and retesting to ensure compliance with the criteria the water may be authorised for discharge by the Environment Manager (see section 4.5).

### 4.6. Requirements for Discharge to Land

The objective of discharging water to land (within the site boundary) is to allow the water to infiltrate into the ground, thus avoiding direct discharge to, or pollution of, waters. Any suspended solids in the water are deposited either on the surface or retained in underlying soil layers, so the TSS criterion does not apply. However, to avoid impacts to vegetation or soil contamination pH testing and a visual inspection for oil or grease must be undertaken (refer to [Criteria for Discharge to Waters](#) for criteria and testing methods).

#### 4.6.1. Determining a Suitable Discharge Location

Consideration must be given to the following factors when determining a suitable offsite location:

- (a) Direction of groundwater flow – recharging groundwater that will subsequently flow either back onto site, into excavations or low lying areas should be avoided. This information should be available in the contamination site investigation reports and groundwater monitoring data if undertaken as part of planning approval.
- (b) Erosion – the receiving area must have complete groundcover (e.g. grass) and established vegetation to minimise the risk of erosion. Guidance on best practice for reducing the risk of erosion can be found in [Managing Urban Stormwater](#).
- (c) Flora and fauna – water must not be discharged to areas where there is potential to have an adverse effect on any flora or fauna species. Information on ecological surveys for flora and fauna can be found in the Environmental Impact Statement and the Fauna and Flora Management Plan.
- (d) Flooding – the receiving area must have the infiltration capacity to receive the volume of water to be discharged, without causing flooding or significantly increasing the risk of flooding should subsequent rainfall occur. This information can be found in the Flood Modelling undertaken for the Environmental Impact Statement.

#### 4.6.2. Criteria for Discharge to Land

Discharge to land within the site boundary shall only occur if:

- (a) There is no visible oil or grease (otherwise treat in accordance with [Treating Water Prior to Discharge](#)).
- (b) The pH levels are between 6.5 and 8.5 (otherwise treat in accordance with [Treating Water Prior to Discharge](#)).
- (c) No surface runoff will be generated from the discharge and there is no potential for discharged water to reach any watercourse (within or outside the site).
- (d) No erosion is caused from the discharge and appropriate erosion and sediment control are installed in accordance with *The Blue Book*.

## OFFICIAL

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



- (e) All discharge water can be wholly contained within the site boundary.

If all criteria above are met then the water may be authorised for discharge to land by the Environment Manager – go to [Reuse on Site](#).

### 4.7. Reuse on Site

Water may be reused on site, for example, for dust suppression, to assist with compaction or for watering landscape/bush regeneration areas. As with discharges to land, the TSS criterion does not apply as water will not be discharged to any watercourse. However, pH testing and a visual inspection for oil or grease must be undertaken (refer to [Criteria for Discharge to Waters](#) see section 4.4.1 for criteria and testing methods).

#### 4.7.1. Criteria for Reuse on Site

Reuse on site shall only occur if:

- (a) There is no visible oil or grease (otherwise treat in accordance with [Treating Water Prior to Discharge](#)).
- (b) The pH levels are between 6.5 and 8.5 (otherwise treat in accordance with [Treating Water Prior to Discharge](#)).
- (c) No erosion is caused from the discharge.
- (d) Any runoff generated by the reuse is controlled entirely within the site boundary and appropriate sediment controls are installed and maintained in accordance with *The Blue Book*.

If all criteria above are met then the water may be authorised for reuse by the Environment Manager – go to [Reuse on Site](#).

### 4.8. Discharging Water

Once water has been tested and meets all the criteria for discharge to either waters or land, or for reuse on site, the Nominated Representative must authorise the discharge by signing [SM-17-00000109 Water Discharge or Reuse Approval Form](#). If required, the Sydney Metro Manager Environment or the Environmental Representative may also sign off the form prior to commencing the discharge.

Discharge can use a siphon system or a pump, with a priority on delivering low energy flows to downstream drainage lines, watercourses or land. The flow from the outlet must be directed onto a non-erodible surface or material and, for discharges to waters, sufficient energy must be dissipated before the flow enters the natural watercourse to ensure no erosion shall occur.

The pump inlet must be placed so that it will not disturb or take in any sediment or sediment laden water. The discharge must be monitored throughout to ensure that the water being syphoned or pumped:

- Complies with the discharge criteria.
- Does not come into contact with any soil or exposed surfaces before discharging.

OFFICIAL

Metro Body of Knowledge (MBoK)  
(Uncontrolled when printed)



- Does not mix with any sediment laden/untreated water at either the inlet or outlet.
- Water must never be discharged or reused onsite in a manner that exceeds the capacity of sediment controls and/or generates runoff with the potential to discharge from site.

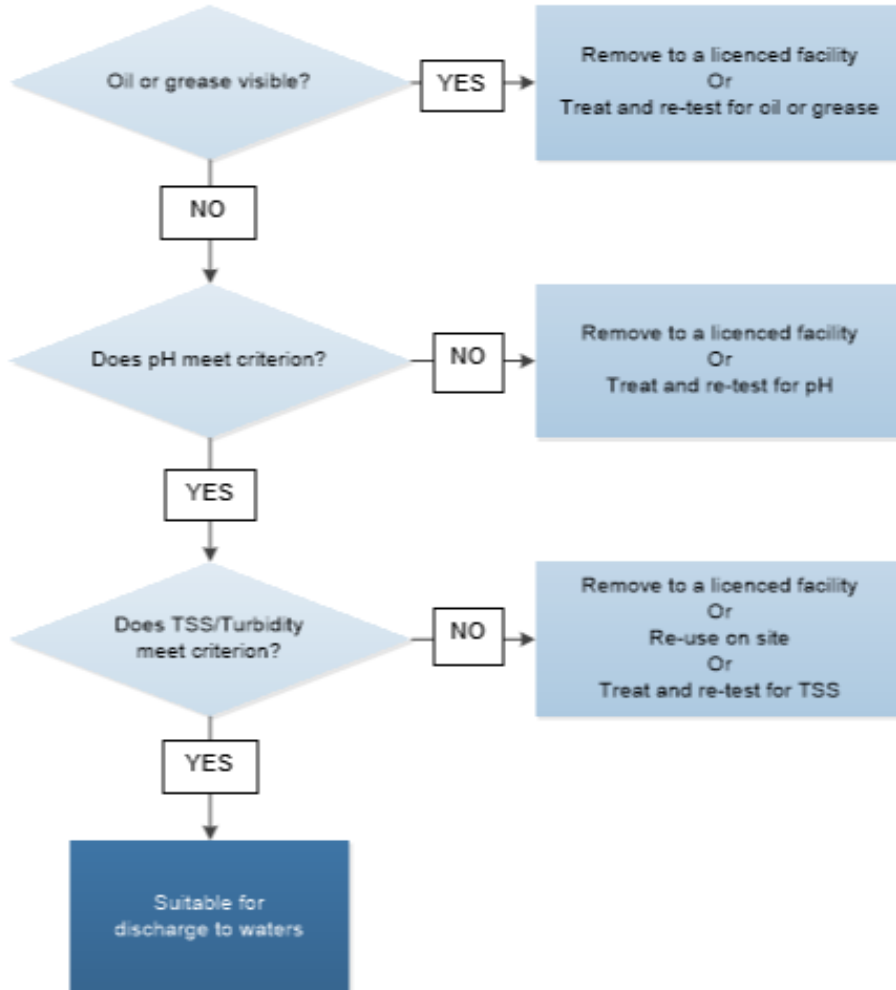


Figure 1: Process for testing water to determine options for removal, reuse, treatment or discharge

OFFICIAL

OFFICIAL

Metro Body of Knowledge (MBoK)  
(Uncontrolled when printed)



4.8.1. Monitoring and Maintenance

All sediment controls or areas that store water must be inspected to assess their integrity and capacity, as a minimum at the following times:

- Weekly during dry weather;
Prior to forecast rainfall events; and
During rainfall events (as often as possible), within 24 hours or as soon as possible following a rainfall event when the site is unattended (e.g. on weekends).

During any offsite or onsite discharge, regular monitoring must occur to ensure compliance with the requirements specified in this Procedure.

All rain event data shall be recorded for the site, including rainfall quantities from each rain event. Rainfall data should be gathered from the nearest monitoring station to the project.

4.8.2. Record Keeping

Records of all water discharges must be documented using SM-17-00000109 Water Discharge or Reuse Approval Form or site-specific equivalent. Records of all monitoring and maintenance measures must also be kept, on the site-specific environmental inspection checklist and other relevant document(s) (e.g. Site Foreman's diary).

5. Related documents and references

Table with 1 column: Related documents and references. Contains 4 bullet points with links to various documents like Sydney Metro Environment and Sustainability Statement of Commitment.

6. Superseded documents

Table with 1 column: Superseded documents. Content: There are no documents superseded as a result of this document.

7. Document history

Table with 3 columns: Version, Date of approval, Notes. Shows document history from version 1.0 (31 March 2015) to 3.0 (27 March 2019).

# Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

OFFICIAL

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



## Water Discharge or Reuse Approval Form

Location, quantity of water and proposed action								
Location of water to be removed:		Hurlstone Park – Sediment Tank				Reference No:	WDRA05	
Approval requested by:		Joel Armstrong				Date:	09/03/22	
Proposed discharge/reuse:		<input checked="" type="checkbox"/> Discharge to waters	<input type="checkbox"/> Discharge to land	<input type="checkbox"/> Reuse on site		Quantity (L):	15,000L	
Details of discharge/reuse: (method, location, controls, etc)		Water from excavation was pumped into the sediment tank and then treated with flocculant.						
Test method								
<input checked="" type="checkbox"/>	Probe/meter:	YSI ProDss for pH		Test record/Laboratory report No:	868930-W; 869954-W			
<input checked="" type="checkbox"/>	Grab sample:	Sent to Eurofins lab for analysis		Equipment calibration prior to test:	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> (if no state why below):			
Test performed/sample collected by:		Chong Zheng (Cardno water engineer)						
Test results								
Location (specific descriptor)	Date	Time	Is this a re-test?	Oil & grease visible (Y/N)	pH 6.5 – 8.5 Reading	TSS/Turbidity <50mg/L / NTU1 Reading	Option 2 A,B,C,D,E	Notes, actions or treatment required
Sediment tank	07/03/22	7:50am	No	N	8.88	TSS: 105	E	Aluminium sulphate flocculant added.
Sediment tank	09/03/22	7:20am	Yes	N	7.12	TSS: 38	D	
1. Criteria for turbidity must be determined from site specific correlation between TSS and turbidity – refer to <a href="#">SM-17-0000098 Water Discharge and Reuse Procedure</a> for details.								
2. Select one:		A = Remove to licensed facility	B = Reuse on site	C = Discharge to land	D = Discharge to waters	E = Treat and re-test		

# Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105

OFFICIAL

Metro Body of Knowledge (MBoK)

(Uncontrolled when printed)



<b>Option A: Remove to licensed facility</b>			
Water to be collected and removed from site by:			
Water to be transported to (name & location of the licensed facility):			
<b>Option B: Re-use on site (including into holding pits/tanks, dust suppression)</b>			
Re-use will be applied to an area that is effectively secured with appropriate downstream sediment controls and will not generate off-site runoff.			Yes <input type="checkbox"/> No <input type="checkbox"/>
<b>Option C: Discharge to land</b>			
Discharge location has complete ground cover, such that erosion will not occur and sufficient infiltration capacity to receive quantity of water: Will discharge generate any runoff or create the potential for runoff to reach any watercourse (on or offsite)?			Yes <input type="checkbox"/> No <input type="checkbox"/>
<b>Option D: Discharge to waters</b>			
From visual inspection the quality of the water to be discharged is equally good or better than the quality of the receiving water?			Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Flow from outlet can be directed onto a non-erodible surface and will not cause scouring or erosion: Could the water come into contact with any exposed soil or potential contaminants before it reaches the water course or discharge point?			Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
<b>Option E: Treat the water then re-test</b>			
Location to be treated (if not in situ):	Treatment occurring in-situ.		
Parameter(s) to be treated:	Turbidity and pH.		
Detail the treatment to be used including products, quantities and methodology:	6kg of aluminium sulphate flocculent added (Hy-Clor brand).		
<b>Discharge authorised by:</b>	<b>Position/Organisation:</b>	<b>Signature</b>	<b>Date:</b>
James Allsop	Environment Manager		11/03/2022
By signing this <a href="#">form</a> the signatory confirms water to be discharged meets the relevant criteria as specified in accordance with the <a href="#">SM-17-0000098 Water Discharge &amp; Reuse Procedure</a>			

**Copy to Manager Environment and Environmental Representative and any others as required. Attach site dewatering plan where applicable.**

## **Appendix F – Water Discharge Management Standard (DG-ZH-ST064)**

# APPENDIX F – WATER DISCHARGE MANAGEMENT STANDARD (DG-ZH-ST064)

## Standard

### TABLE OF CONTENTS

APPENDIX F – WATER DISCHARGE MANAGEMENT STANDARD (DG-ZH-ST064)	1
1 PURPOSE	2
2 SCOPE	3
3 DEFINITIONS	4
4 PLANNING REQUIREMENTS	5
4.1 Identifying Receiving Waterways/ Sources of Contaminants	5
4.2 Causes	5
4.3 Critical Controls	6
4.4 Risk Specific Management Plans	6
4.4.1 Erosion and Sediment Control Plan (ESCP)	6
4.4.2 Water Management Plan (WMP)	7
5 ON THE JOB	8
5.1 Environmental Principles	8
5.2 Avoidance of Uncontrolled Release of Contaminants to Water	9
5.3 Reduce Sources of Contaminants to Water	9
5.4 Sediment Control	10
5.5 Works in Waterways	10
5.6 Onsite Toilet Systems	11
5.7 Vehicle and Equipment Washdown Facilities	11
5.8 Monitoring Water Discharges	12
5.9 Water Use Efficiency	12
6 MONITORING AND REVIEW	13
7 REFERENCED & ASSOCIATED DOCUMENTS	14
ANNEX A – WATER QUALITY MONITORING FOR ASPHALT AND BITUMEN PLANTS, WORKSHOPS AND TRUCK WASHES	15
ANNEX B – EXAMPLE EROSION AND SEDIMENT CONTROL PLAN (EXCLUDING COMMENTARY)	16



# 1 PURPOSE

This document defines the standards required to be met and responsibilities for water discharge management.

All requirements in this standard are consistent with the Downer policies and procedures listed in section 7 *Referenced & Associated Documents*.

## 2 SCOPE

This standard applies to the Downer Group, including all business groups; hereafter referred to as Downer.

The target audiences for this standard are Project Engineers, Managers, Supervisors and Zero Harm personnel, Downer workers, contractors (unless formally agreed to and documented) involved in the planning, permitting, execution or supervision of work, and visitors

Where a Downer client prescribes an alternative methodology for on-site processes that is of a mandatory, equal or higher standard, the client's methodology may be applied once reviewed by the Project Manager.

This standard applies to the management of Downer managed businesses and controlled activities where there is a requirement for Downer to manage or influence water discharge.

All business groups are responsible for implementing the requirements of this standard, which may include using business group-specific documentation. Business groups are responsible for updating and maintaining any business group-specific documentation that supports this standard.

### 3 DEFINITIONS

The following terms are used in this document and are included in the *Definitions Register*.

<b>Clean surface water</b>	Water from undisturbed areas that has not been impacted by operational activities.
<b>Dirty surface water</b>	Water that has been in contact with operational areas or used for operational purposes.
<b>Effluent</b>	Process water which is being discharged into surface water after being treated.
<b>Erosion</b>	Transport by wind, water and ice of Soil, sediment and rock fragments produced by the weathering of geological features.
<b>Ground water</b>	Water stored underground in rock crevices and in the pores of geologic materials that make up the Earth's crust, waters that supplies springs and wells.
<b>Leachate</b>	Water which has trickled through solid wastes and may contain metals and dissolved minerals.
<b>Sedimentation</b>	Sedimentation occurs when eroded material that is being transported by water, settles out of the water column onto the surface, as the water flow slows.
<b>Surface water</b>	Water other than ground water.
<b>Waterway</b>	Any river, stream, lake, lagoon, swamp, wetlands, unconfined surface water, natural or artificial watercourse, dam or tidal waters (including the sea), or any water stored in artificial works, any water in water mains, water pipes or water channels, or any underground or artesian water and any part thereof.
<b>Water contamination</b>	Is the term used to describe materials of any kind that are polluting a source of water. This could include both biological and chemical substances.
<b>Water quality</b>	Physical measures such as dissolved oxygen, chemical measures such as nitrogen and measures of toxicants such as pesticides and heavy metals.

## 4 PLANNING REQUIREMENTS

### 4.1 Identifying Receiving Waterways/ Sources of Contaminants

Prior to commencing work identify receiving waterways (including stormwater drains) located within the project or site. Consider the natural path water will use to find its way to a waterway should a rain event occur. Waterways may be located within, adjacent to, beneath, or remotely from the work site.

Identify the contaminants by considering the different tasks of the work program. When performing an activity, contaminants may be used, generated, produced, stored, transported, transferred or disposed of.

Understand the contaminant's properties and their effects on the receiving waterways. Where applicable, consult the material / product Safety Data Sheet (SDS).

Common contaminants and their effects on water quality are presented below.

Contaminant	Effects on Water Quality
Sediment Particles	<ul style="list-style-type: none"> <li>Affects water turbidity and clarity when suspended.</li> <li>Smothers habitats when settles in waterways or lakes.</li> <li>Other pollutants will bind and get transferred with sediment particles.</li> </ul>
Concrete Wash Off	<ul style="list-style-type: none"> <li>Affects turbidity and clarity when suspended.</li> <li>Affects water alkalinity balance (measured as pH) which can affect plants and animals.</li> </ul>
Hydrocarbons (Diesel, Petrol, Oils)	<ul style="list-style-type: none"> <li>Eco-toxicity to fish, plant and insect life.</li> <li>Water aesthetics is affected by sheens.</li> </ul>
Sewage	<ul style="list-style-type: none"> <li>Diseases to humans through water born bacteria and viruses.</li> <li>Oxygen depletion in water due to extra organic matter.</li> </ul>

To assist in the identification of receiving waterways and sources of contaminants consider reviewing:

- ▶ BowTie Analysis reports.
- ▶ Zero Harm risk register.
- ▶ Safe Work Methods and/ or Instructions.
- ▶ Workplace Inspection, Hazard and/ or Audit reports.
- ▶ Permit to Work documentation.
- ▶ Industry Standards and/ or Codes of Practice.
- ▶ Relevant client documentation or work methods.



**Regulatory Authorisations** – Erosion and Sediment Control Plans may require local council, state or federal government authorisation prior to commencing work. Ensure plans are developed in accordance with the International Erosion Control Association (IECA) Best Practice Guidelines and regional requirements i.e. NSW Blue Book. If unsure contact a HSE or Environmental Professional.

### 4.2 Causes

The following examples are causes of unauthorised release of contaminants to waterway:

- ▶ Earthworks in or nearby a waterway (relocating bed material).
- ▶ Structural work above waterways (paint removal, surface preparation, reconstruction).
- ▶ Works in or under waterways (under boring, erecting structures).
- ▶ Inadequate or no storm water drain protection.

## 4.3 Critical Controls

The Critical Controls required to manage the release of contaminants to waterways include:


- ▶ construction of diversion drains/ earth berms, installation of temporary bunds to contain any unplanned release
- ▶ early installation of containment measures (e.g. silt curtains, booms)
- ▶ installation of interceptors to prevent contaminants from entering waterways; and
- ▶ waste (including dredging spoil) is contained and disposed of at an approved location.

The Critical Controls required to minimise the consequences of unauthorised release of contaminant to water/ are the installation of:

- ▶ silt curtains; and/ or
- ▶ floating berms (downstream).

## 4.4 Risk Specific Management Plans

Managers and Supervisors must identify and document any and all activities that cause land disturbance or water contamination. These activities require a plan to be developed and incorporated into the site or project Zero Harm Management Plan or Environmental Management Plan. The purpose of the plan is to document the measures and critical controls designed to mitigate soil erosion and control discharge of sediment, nutrients and other pollutants to land and other waterway during works to the principles of the erosion and sediment control hierarchy.



### 4.4.1 Erosion and Sediment Control Plan (ESCP)

Managers and Supervisors must document an Erosion and Sediment Control Plan (ESCP) for sites where operations may result in erosion, sedimentation or impacts from turbidity or hydrologic changes offsite. This plan will include but may not be limited to, a drawing that clearly shows the site layout including:

- ▶ North point and plan scale
- ▶ approximate grades and directions of falls. (Contours 0.5m for gradients <15%, 1m for gradients 15-30% and 2m slopes >30%)
- ▶ site boundaries, adjoining roads and sensitive surroundings
- ▶ construction access points
- ▶ site office, car park and location of stockpiles
- ▶ proposed construction activities and limits of disturbance
- ▶ approximate location of trees and other vegetation designated "No Go Zones"
- ▶ existing and proposed drainage patterns and discharge points
- ▶ clean water diversion of upslope runoff around the disturbed areas
- ▶ location and details of proposed erosion and sediment control measures
- ▶ location of stockpile areas, including topsoil storage, protection and reuse methodology
- ▶ creek crossings and mitigation controls; and
- ▶ commentary describing:
  - timing of works
  - nature and extent of earthworks (cut and fill)
  - site rehabilitation proposals including schedules; and
  - frequency and nature of maintenance regimes.



**Regulatory Authorisations** – The discharge of contaminants to water may require local council, state or federal government authorisation. Authorisations may be issued to Downer or directly to our client. If you have a requirement to discharge water from your premises and are unsure of the regulatory requirements to undertake this work, please contact a HSE or Environmental professional for assistance.

#### 4.4.2 Water Management Plan (WMP)

Managers and Supervisors must document a Water Management Plan (WMP) on fixed sites such as Asphalt plants. This plan will contain a drawing that clearly shows the site layout including:

- ▶ North point and plan scale
- ▶ approximate directions of water flow including drainage, water treatment systems and discharge points
- ▶ site boundaries, adjoining roads and sensitive surroundings
- ▶ access points
- ▶ site office, car park and location of stockpiles/ dangerous goods/ hazardous substances storage locations
- ▶ separation of clean and dirty water pathways; and
- ▶ commentary describing:
  - water treatment systems (including onsite septic systems) and its operation
  - maintenance and monitoring regime of water treatment systems
  - trade waste discharge limits – refer to trade waste agreement
  - stormwater discharge limits – refer to your manager environmental sustainability or environmental consultant; and
  - unplanned/ uncontrolled discharge management.

## 5 ON THE JOB

The requirements for the effective management of water discharge are described below.

### 5.1 Environmental Principles

EP1 – Check Approvals and permits are in place before starting work.

EP2 – Protect waterways and be prepared for spill events.

EP3 – Use effective erosion and sediment controls.

EP4 – Store and secure chemical substances in bunded areas.



## 5.2 Avoidance of Uncontrolled Release of Contaminants to Water

Managers and Supervisors must manage and verify the following actions are taken.

Source/ Activities	Controls
Planning	<ul style="list-style-type: none"> <li>• Implement the documented controls prior to conducting any other work.</li> </ul>
Soil exposure from earthworks	<ul style="list-style-type: none"> <li>• Expose the smallest possible area of land disturbance for the shortest possible time by:               <ul style="list-style-type: none"> <li>– limiting vehicle movement to existing tracks</li> <li>– maintaining access tracks in sound condition to limit the likelihood of vehicles not using the track</li> <li>– ensuring turning circles are constructed where required; and</li> <li>– protecting areas of concentrated water flow by leaving and/ or using existing topsoil with vegetation or installing protective matting or fabric.</li> </ul> </li> <li>• Keep exposed areas clear of any drainage lines.</li> <li>• Rehabilitate disturbed areas quickly (as required by local guidelines).</li> <li>• Seal access tracks and pathways that are used for prolonged periods (recycled brick and other quarry material is suitable and will be removed at the end of the project).</li> </ul>
Fixed Sites (Low Risk)	<ul style="list-style-type: none"> <li>• Divert clean water around potential areas of contaminants.</li> <li>• Seal access tracks and pathways; and</li> <li>• Storm water runoff from areas that will not be contaminated can be harvested for reuse or if no other options are available discharged without treatment (i.e. runoff from a roof).</li> </ul>
Fixed Sites (i.e. Asphalt and bitumen plants) with the Potential to Pollute Waterways	<ul style="list-style-type: none"> <li>• Install a suitable water treatment system. The water treatment system should treat as a minimum suspended solids and hydrocarbons.</li> <li>• Regularly test discharged stormwater to ensure ongoing compliance with the discharge limits.</li> </ul>

## 5.3 Reduce Sources of Contaminants to Water

Managers and Supervisors must manage and verify the following actions are taken.

Source/ Activities	Controls
Controlling Sediment Runoff from Slopes and Stockpiles from Earthworks	<ul style="list-style-type: none"> <li>• Divert clean water around stockpiles and install sediment fences on the down slope of stockpiles.</li> <li>• Batter slopes should be tilled or mulched along the contour to reduce flow velocities and limit erosion.</li> <li>• When locating stockpiles consider the vicinity of waterways, site boundary and other significant areas. Use the natural grade of the stockpile to divert run off away from waterways, roads etc.</li> <li>• Where possible limit the height of stockpiles to less than 2.5m and batter the sides to 2 (horizontal):1 (vertical) or flatter.</li> <li>• Where possible cover stockpiles or seed stockpiles with sterile seed.</li> </ul>
Hazardous Chemicals	<ul style="list-style-type: none"> <li>• Bund hazardous chemicals and transfer areas as per <b><i>DG-ZH-ST054 Hazardous Chemicals and Dangerous Goods Storage Principles and Transportation Standard (under development)</i></b></li> <li>• Cover bunds and transfer areas where possible.</li> <li>• Clean spills immediately.</li> <li>• Empty bund water as per <b><i>DG-ZH-ST054 Hazardous Chemicals and Dangerous Goods Storage Principles and Transportation Standard (under development)</i></b>.</li> <li>• Ensure adequate spills kits are available.</li> </ul>



Source/ Activities	Controls
Vehicle & Mobile Plant	<ul style="list-style-type: none"> <li>• Maintain vehicles and mobile plant as per the manufacturers' guidelines.</li> <li>• Refuel, service and maintain vehicles, plant and equipment on designated level ground only, and at &gt;40m from any waterway and other significant areas.</li> <li>• Drip trays and spill kits are essential when using mobile refuelling locations and temporary bunding maybe warranted.</li> </ul>

## 5.4 Sediment Control

Managers and Supervisors must manage and verify that erosion and sediment controls are implemented in accordance with International Erosion and Sediment Control Best Practice Guidelines.

Source/ Activities	Controls
Paved Roads	<ul style="list-style-type: none"> <li>• Use street sweepers where there is a build-up of soil on paved roads.</li> <li>• Use a drain warden, mesh and gravel inlet filter, geotextile inlet filter, sandbags or other locally approved method to reduce the sediment load on the water treatment system.</li> </ul>
Sediment Control Measures when Disturbing Land	<ul style="list-style-type: none"> <li>• Implement sediment control measures that slow the water to allow the sediments to settle out. i.e. sediment fencing, rip rap. Grass filter strips.</li> </ul>
Dispersible soils when performing earthworks	<ul style="list-style-type: none"> <li>• A sediment basin is required to capture and treat sediments (such as wet sediment basins, dry sediment basins, lined tanks, infiltration sumps etc.).</li> </ul>
Water Release from Sediment Ponds, Trenches, Excavations and Bunds	<ul style="list-style-type: none"> <li>• Water from sediment ponds can be used to irrigate vegetated areas remote from waterways or alternatively be used for dust control.</li> <li>• water should be tested for total suspended solids (TSS) and pH prior to water release. The water release limits can be found in Environmental Licence / Authorisation conditions, Regulatory Guides or the <i>ANZECC &amp; ARMCANZ 2000 Australian and New Zealand Guidelines for Fresh and Marine Water Quality</i>.</li> <li>• A water release permit using <i>DG-ZH-FM064.1 Water Release Permit</i>, or New Zealand equivalent, will be issued prior to any manual water release.</li> </ul>

## 5.5 Works in Waterways

Managers and Supervisors must manage and verify the following actions are taken.

Source/ Activities	Controls
Planning	<ul style="list-style-type: none"> <li>• Works in waterways require approvals from regulatory authorities.</li> <li>• Develop and implement an Erosion and Sediment Control Plan.</li> <li>• Minimise disturbance to natural river bed, stream flow and fish migration and spawning.</li> </ul>
Waterway CROSSINGS	<ul style="list-style-type: none"> <li>• Crossings should not disrupt natural stream flow and fish migration.</li> <li>• Crossings should not erode and create upstream or downstream flooding.</li> </ul>
Vehicle & Mobile Plant	<ul style="list-style-type: none"> <li>• Refuel, service and maintain vehicles, plant and equipment on designated level ground only, and at &gt;40m from any waters and other significant areas.</li> <li>• Drip trays and spill kits are essential and temporary bunding maybe warranted.</li> </ul>
In Stream Works (e.g.: Stormwater Outlets, Installing Culverts)	<ul style="list-style-type: none"> <li>• Work outside the waterway where possible.</li> <li>• Isolate the work area from the flowing water by diverting the waterway or the use of barriers.</li> <li>• Contain all contaminants within the work area and remove contaminant before reinstating flowing water.</li> </ul>
Pipe Crossings	<ul style="list-style-type: none"> <li>• Use drilling or pipe jacking instead of open excavation where possible.</li> <li>• Isolate the work area from the flowing water by diverting the waterway or by the use of barriers.</li> <li>• Remove contaminants from any groundwater pumped.</li> </ul>

Source/ Activities	Controls
Weed Spraying	<ul style="list-style-type: none"> <li>• Avoid direct spraying in waterways as much as possible.</li> <li>• Use only herbicide approved for waterway applications and as per manufacturer instructions.</li> <li>• Applicators must be trained and qualified for the product and the task.</li> </ul>
Dredging	<ul style="list-style-type: none"> <li>• Implement sediment control measures downstream of the work.</li> <li>• Store dredged material away from waterways.</li> </ul>
Working over Waterways	<ul style="list-style-type: none"> <li>• Implement controls to prevent materials from falling into the waterways.</li> <li>• Implement a methodology to prevent contaminant runoff (e.g. during concrete pour).</li> </ul>

## 5.6 Onsite Toilet Systems

Managers and Supervisors must manage and verify the following actions are taken.

Source/ Activities	Controls
Non-Sewered Sites	<ul style="list-style-type: none"> <li>• All onsite toilet systems (excluding portable 'portaloos' type systems that are standalone, or trailer mounted and sewage/ wastewater treatment plant's) must be supplied and fitted with: <ul style="list-style-type: none"> <li>– alarms on the waste storage tanks to indicate when storage tanks are at 90% full of full by volume capacity</li> <li>– automatic cut-off valves on the potable water supply when the waste storage tanks are at 90% full of full by volume capacity; and</li> <li>– push taps (e.g. time flow taps).</li> </ul> </li> <li>• Ensure the volume of the onsite toilet system's potable water tank does not exceed 90% of the volume of the wastewater storage tank.</li> <li>• Carry out daily inspection of onsite septic systems.</li> <li>• Maintain inspection and maintenance records.</li> <li>• Immediately report any waste water leaks, spills or overflows regardless of volumes.</li> <li>• Repair faulty or leaking equipment.</li> <li>• Monitor the waste water storage tank and organise removal of liquid waste as required.</li> <li>• Monitor the water supply tank and organise filling as required.</li> <li>• Ensure taps and toilets are not left running.</li> </ul>

## 5.7 Vehicle and Equipment Washdown Facilities

Managers and Supervisors must manage and verify the following actions are taken:

Source/ Activities	Controls
Permits	<p>Vehicle and Equipment Washdown Facilities that will discharge waste into the sewer will be approved by the appropriate water authority prior to installation.</p> <p>For unsewered areas, other options are available such as store and dispose to a licensed facility, dedicated vegetated or landscaped area, evapo-transpiration bed, or evaporation lagoon. Regulatory approval (Local, Region, State, National) maybe required for any of these methods of waste water disposal.</p>
Vehicle and Equipment Wash Water	<ul style="list-style-type: none"> <li>• Recycle wash water waste where possible.</li> <li>• Treat wash water with an appropriate water treatment system that meets the requirements set out by the appropriate regulatory authority.</li> <li>• Regularly test wash water to ensure ongoing compliance with the discharge limits.</li> </ul>

Source/ Activities	Controls
Vehicle and Equipment Wash Bay Construction	<ul style="list-style-type: none"> <li>• Cover and bund wash bays to ensure all water used in the truck wash process is captured and there is no infiltration of rainwater.</li> <li>• Rainwater from the roof should be captured and used within the truck wash.</li> <li>• Truck wash bay floor must be constructed of material of low permeability.</li> <li>• The truck wash will be of appropriate size to prevent overspray.</li> <li>• The floor of the truck wash bay will be graded to drain towards the collection point.</li> </ul>
Maintenance of Vehicle and Equipment Washdown Facility	<ul style="list-style-type: none"> <li>• Maintain facility water treatment systems as per the manufacturer's specification.</li> <li>• Regularly clean the floor and any sediment pits and dispose of waste as per <i>DG-ZH-ST063 Waste Management Standard</i>.</li> </ul>

## 5.8 Monitoring Water Discharges

Managers and Supervisors must verify that all water discharges from site operations comply with the relevant regulatory requirements and appropriate site-specific licence conditions. Licences to discharge must be held where required.

Before planning to discharge water from site, the water must be sampled and analysed in accordance with licence and contractual requirements (upstream/ downstream monitoring). Any discharge of water from a site must be conducted in consultation with the Customer.

In the absence of discharge locations specified in the approval conditions and by the Customer, an appropriate disposal method and location based on the results of analysis, that prevents pollution of local and regional groundwater and surface water resources, is to be selected in consultation with the Customer and/ or regulator.

In the absence of an existing response plan to deal with unplanned water discharges, a site-specific emergency response plan must be developed in consultation with the Customer. Roles and responsibilities of relevant personnel are to be identified and communicated under the response plan. Adequate training must be provided to the relevant personnel responsible for implementing the plan.

## 5.9 Water Use Efficiency

Where practical and depending on the scope of works, water efficiency measures should be identified such as:

- ▶ recycle/ reuse of water for irrigation or equipment wash down
- ▶ use of water for dust suppression where risk of contamination does not exist
- ▶ identification of ways to minimise evaporation; and
- ▶ rainwater harvesting for use on site should also be considered.

The recycle/reuse of water at sites must be in compliance with relevant legislation and agreed upon with the Customer.

## 6 MONITORING AND REVIEW

Managers and Supervisors must manage and verify the following actions are taken:

Activities	Controls
Inspections of Erosion and Sediment Controls	<ul style="list-style-type: none"> <li>• Inspections are:               <ul style="list-style-type: none"> <li>– to occur weekly; and</li> <li>– prior to and immediately after a significant rain event.</li> </ul> </li> </ul>
Inspections for Asphalt and Bitumen Plants, Workshops and all Other Sites with a Truck Wash	<ul style="list-style-type: none"> <li>• Informal inspections are:               <ul style="list-style-type: none"> <li>– to occur weekly; and</li> <li>– prior to and immediately after a significant rain event.</li> </ul> </li> <li>• Formal inspections are to occur monthly</li> </ul>
Water Release (earthworks, bunds etc.)	<ul style="list-style-type: none"> <li>• Test water for total suspended solids (TSS) and pH prior to discharge.</li> <li>• Perform further testing where there is risk of other contamination (e.g. hydrocarbons, nitrates etc)</li> </ul>
Water Monitoring for Asphalt and Bitumen Plants, Workshops and all Other Sites With a Vehicle and Equipment Washdown Facility	<ul style="list-style-type: none"> <li>• Monitor stormwater and truck wash water discharge as per <i>Annex A - Water Quality Monitoring for Asphalt and Bitumen Plants, Workshops And Truck Washes.</i></li> </ul>

## 7 REFERENCED & ASSOCIATED DOCUMENTS


<b>PROCEDURES</b>	
<i>DG-ZH-PR006</i>	Incident Management Procedure
standards	
<i>DG-ZH-ST054 (under development)</i>	Hazardous Chemicals and Dangerous Goods Storage Principles and Transportation Standard
<i>DG-ZH-ST063</i>	Waste Management Standard
FORMS	
<i>DG-ZH-FM064.1</i>	Water Release Permit
<i>DG-ZH-FMxxx (under development)</i>	Environmental Inspection Checklist Asphalt Plant
REGISTERS	
<i>Definitions Register</i>	
<b>GUIDES</b>	
<i>DG-ZH-CG063</i>	Management of Waste
Other	
<i>ANZECC &amp; ARMCANZ 2000</i>	<i>Australian and New Zealand Guidelines for Fresh and Marine Water Quality</i>

## ANNEX A – WATER QUALITY MONITORING FOR ASPHALT AND BITUMEN PLANTS, WORKSHOPS AND TRUCK WASHES

Treatment System	Test Methodology	Indicators (Refer to Environmental Professional for the limits)	1st month following a new installation or major change to the site	Ongoing
Stormwater treatment system i.e. first flush device etc.	AS/NZS 5667.10 Guidance on sampling waste waters	<ul style="list-style-type: none"> <li>• Total Petroleum Hydrocarbons (C6-C36)</li> <li>• Monocyclic Aromatic Hydrocarbons (MAH)</li> <li>• Metals</li> <li>• Physical indicators such as:               <ul style="list-style-type: none"> <li>– pH</li> <li>– Surfactants (LAS)</li> <li>– Total Suspended Solids</li> <li>– Total Dissolved Solids</li> <li>– Biochemical Oxygen</li> <li>– Total Organic Carbon</li> <li>– Total Oil &amp; Grease (µg/L)</li> <li>– Total Phosphorus (µg/L)</li> </ul> </li> </ul>	Controlled test to ensure the treatment system operates as per design.	Test every quarter where there is a discharge or as specified by regulatory approval  Exemptions to this rule maybe available from the Manager Environmental Sustainability on the bases of consistent compliant tests.
Wash water treatment system i.e. plate separator etc.	AS/NZS 5667.10 Guidance on sampling waste waters	As per relevant trade waste agreement.	Controlled test to ensure the treatment system operates as per design.	Test every quarter where there is a discharge.

## ANNEX B – EXAMPLE EROSION AND SEDIMENT CONTROL PLAN (EXCLUDING COMMENTARY)

Source: SA EPA Stormwater Pollution Prevention, Code of Practice for the building and construction industry, March 1999.

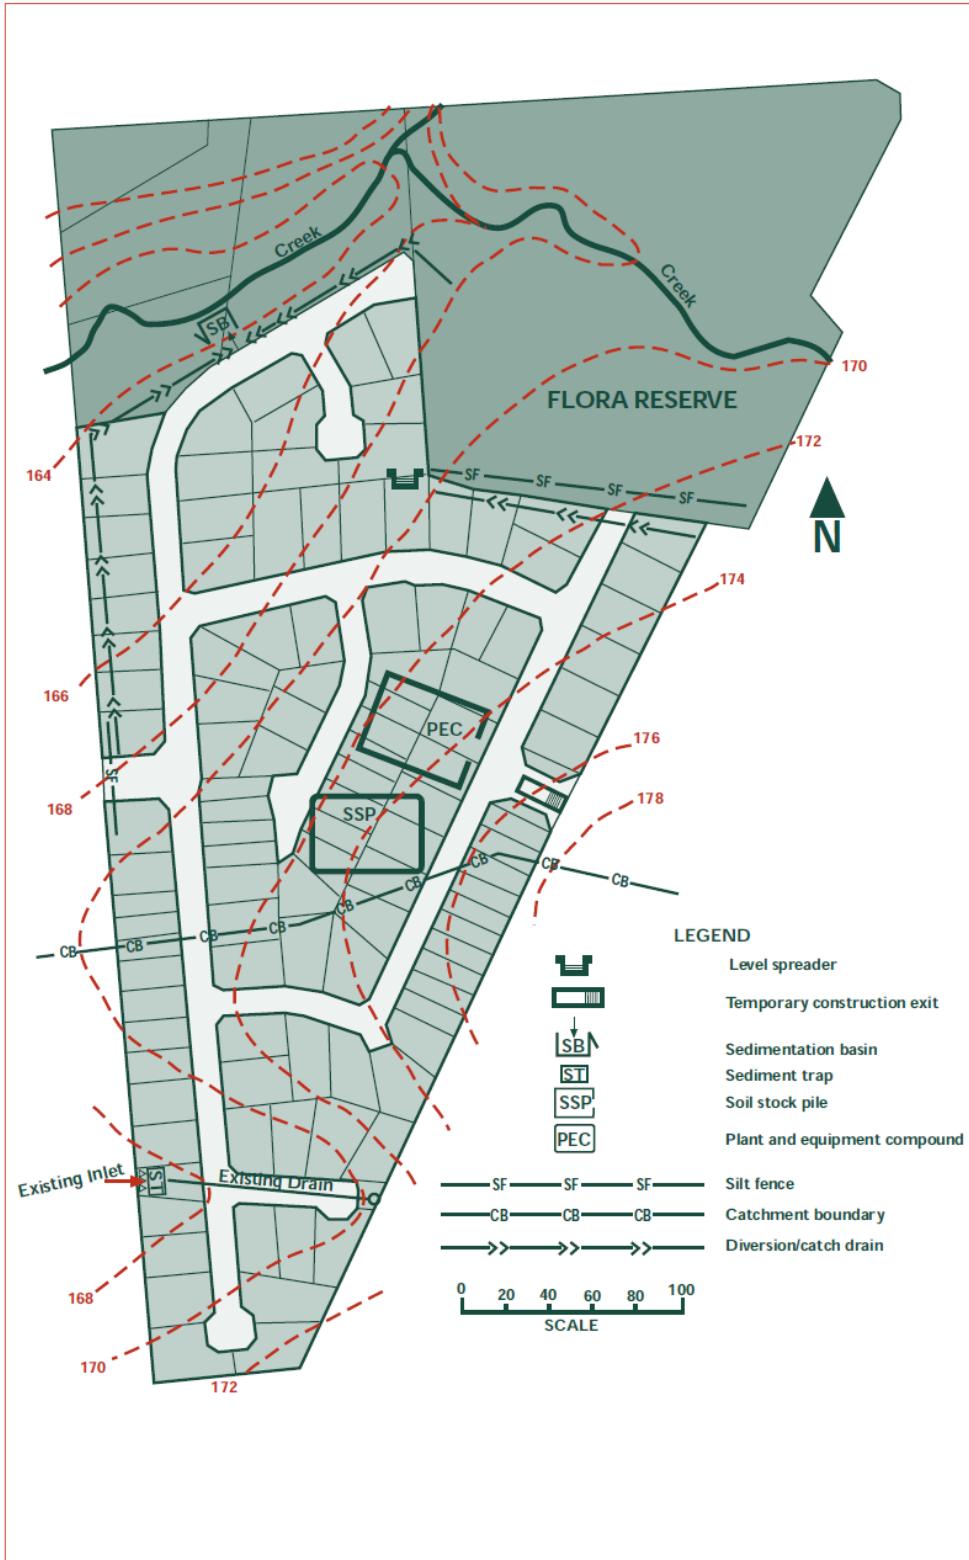

## Appendix G – Water Release Permit (DG-ZH-ST064.1)

FORM HANDLING INSTRUCTIONS					
<ul style="list-style-type: none"> <li>▪ Complete this form prior to any water release activities.</li> <li>▪ When completing sections 2 and 3, ensure the sections reflect the approval, licence or relevant management plan.</li> <li>▪ For further information on water discharge management, refer to <i>DG-ZH-ST064 Water Discharge Management Standard</i>.</li> </ul>					
SECTION 1 – WATER RELEASE OPTIONS					
<p>Treat water as required, test and record results. Water release will only be approved once the water quality complies with relevant licence/ permit conditions.</p> <p>Following treatment of water specify the location for release:</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Pump into a water cart for use as dust suppression.</li> <li><input type="checkbox"/> Spray over a <u>grassed or vegetated area</u>, ensuring the water is being filtered through the vegetation and absorbed, and does not run off the site.</li> <li><input type="checkbox"/> Waterway, stormwater systems</li> <li><input type="checkbox"/> Other (<i>Specify</i>):</li> </ul>					
SECTION 2 – PERMIT DETAILS					
<p><i>Sketch the water release location, including land, waterways and any other environmental sensitive information.</i></p>					
Issues/ Risks:			Controls:		
Permit Validity:	Date:		From: ( <i>Time</i> )	To: ( <i>Time</i> )	
SECTION 3 – RECORD OF DISCHARGE TEST					
	Discharge Limits <i>Refer to permit, licence</i>	Water Quality at Source	Water Quality at Discharge Location		
pH					
Total Suspended Solids					
Visual Assessment for Oil and Grease					
Other (e.g. TPH)					



## Soild and Water Management Plan

Southwest Metro – Hurlstone Park, Belmore and Wiley Park Station Upgrades | SMCSWSW6-DEW-WEC-EM-PLN-000105



<b>SECTION 4 – AUTHORISATION</b>			
	<b>Name</b>	<b>Signature</b>	<b>Date</b>
<b>Issuer</b>			
<b>Receiver</b>			